

# RESIDENTIAL BUILDING STOCK ASSESSMENT II

Manufactured Homes Report 2016-2017

































# Table of Contents

Acknowledgements	2
Executive Summary	3
RBSA Overview	8
Sampling	12
Summary of Building Characteristics	16
Age and Type	17
Building Envelope	19
Air Leakage	21
HVAC Systems	23
Lighting	27
Appliances	33
Water End-Uses	37
Electronics	41
Energy Benchmarking	45
Conservation Purchases and Miscellaneous Loads	47

# Acknowledgements

leadership, and input from numerous organizations. Cadmus would like to thank the following people and organizations for their contributions:

Northwest Energy Efficiency Alliance project manager

Anu Teja Anu provided countless hours of strategic guidance and

### Corinne McCarthy

Northwest Energy Efficiency Alliance senior advisor

Corinne's thought leadership was instrumental in

schedule more than 2,000 participants was crucial to the quality and breadth of findings.

### **RBSA Advisorv** Groups

The contributions of the RBSA advisory groups were essential to designing and planning another successful RBSA

NEEA is an alliance of more than 140 Northwest utilities and energy efficiency organizations working to accelerate the innovation and adoption of energy-efficient products, services and practices in the Northwest.

throughout the course of the project.

### **About this Study**

### **Primary Objective**

### **Key Findings**

# **Executive Summary**

The Northwest Energy Efficiency Alliance (NEEA) completed its second Residential Building Stock Assessment (RBSA) in the fall of 2017. The RBSA is a broad, regional study that characterizes the building stock within three housing types: single-family homes, manufactured homes, and multifamily buildings. This is NEEA's second residential building stock assessment since its first comprehensive, regionally representative study in the 2011-2012 timeframe. For this study, NEEA continued the work of the first RBSA (referred to as RBSA I in this report) and, wherever possible, data were collected in a similar manner to ensure continuity and comparability between the studies. Cadmus conducted the second RBSA (referred to as RBSA II in this report) and collected data in the 2016-2017 timeframe, with recruiting support from Nexant.

This report presents findings for manufactured homes, based on data collected from 411 site visits, which includes the core RBSA study (funded by NEEA), as well as data collected for one oversample funded by Bonneville Power Administration (BPA). Cadmus developed and applied sampling weights to ensure that all manufactured home observations were weighted proportionally to the segment of the population represented by the sample; see Database User Manual for a description of the weighting methods and procedures.


The primary objective of the RBSA is to characterize the existing residential building stock in the Northwest region based on data from a representative sample of homes. NEEA and its partners designed the RBSA to account for regional differences, such as climate, building practices, and fuel choices, by using a large-scale residential sample. The characterization includes the principal characteristics of the homes (e.g., square footage, insulation level, and heating systems), their occupants (e.g., household size and income levels), and their end-use equipment (e.g., lighting, appliances, electronics, and water heating). The sample size chosen for the RBSA II allows benchmarking of energy use within households at sufficient detail to assess the progress of changes in energy efficiency and home characteristics within the region.

The following section presents the study's key findings by end use or measurement. All values in this section are weighted. These key findings represent notable and statistically significant differences between the RBSA I and RBSA II, and in some cases, the emergence of new or different technologies that were not observed in RBSA I.

### Lighting

### LED adoption has soared


The data from this study reveal a dramatic shift in efficiency of lighting in manufactured homes. LEDs have increased from less than 1% six years ago to 18% of all installed bulbs, which is consistent with other housing types. The percentage of installed incandescent bulbs greatly declined, while CFLs remained relatively flat.

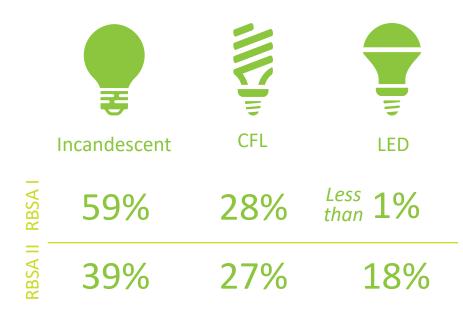

# Mechanically Cooled Homes


# More Northwest manufactured homes include mechanical cooling

The percentage of homes using some type of mechanical cooling increased in all three cooling zones. The only noticeable change in cooling equipment was an increase in the number of air source heat pumps observed.

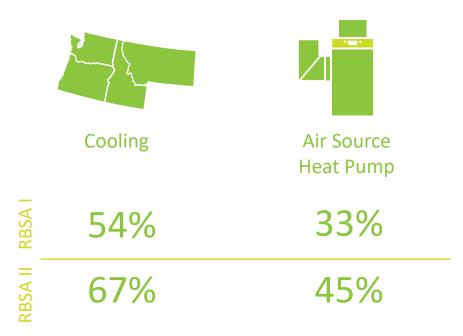


### Connected devices have emerged in homes

Though found in only a small percentage of manufactured homes, connected lighting products have emerged since RBSA I, largely without program support. Wi-Fi and smart thermostats, which have been rebated through regional programs for several years, were also observed in this RBSA study.

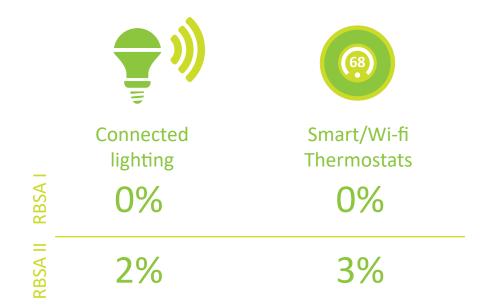

# Electric heating and cooling equipment are more efficient

The efficiency of heat pumps and central air conditioners increased relative to the previous RBSA study. Gas furnace efficiencies also increased.

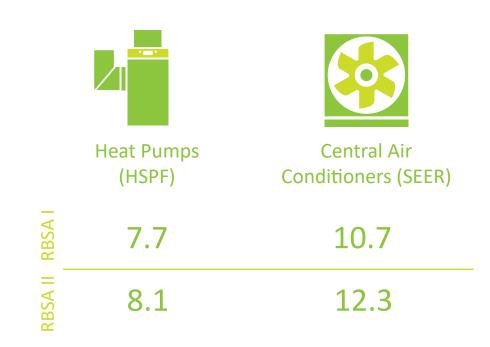


# Connected Devices

# HVAC Efficiency

# Television Technology

### Television technology has shifted


The share of televisions using cathode ray tube designs has plunged since RBSA I, as the older technology gives way to LCD and LED televisions. With the rapid adoption of these more-efficient technologies, there was a large drop in average television power draw.

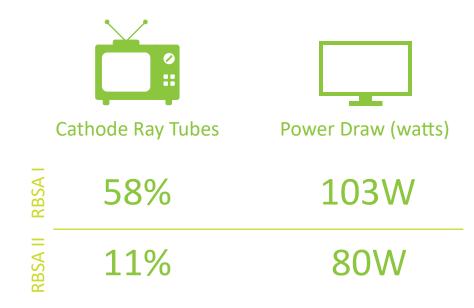

# Electronic Devices


### Composition of electronics are changing

Fewer homes had set-top boxes than in the previous RBSA. While relatively small in quantity, smart strips are beginning to appear in manufactured homes.

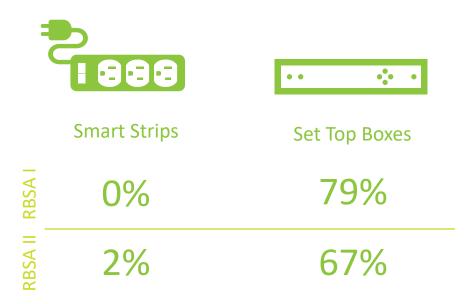

### Homes are tighter on average

Blower door testing measured less air leakage for the region on average in this study than the previous study, and about the same for manufactured as for single-family homes. The RBSA I study also found air leakage to be similar for manufactured (11.8 ACH50) and single-family (10.3) homes.

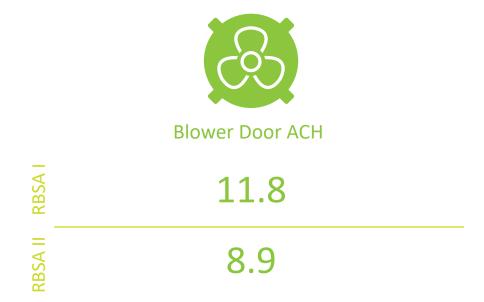

### **Home Tightness**

This is NEEA's second comprehensive manufactured home building stock assessment.

NEEA conducted 10 working group sessions.

## **RBSA Overview**

### **About this Report**

This report includes key findings and themes from the manufactured homes data collected as part of RBSA II, organized by building component and enduse equipment. Each report section provides a high-level summary of data collection protocols, procedures, and findings. Where practical, these sections also highlight key differences between the RBSA II and RBSA I. Cadmus used two-sided t-tests for means and proportions to test the hypotheses that the current RBSA results were equal or not equal to the RBSA I results. We identified metrics where significant changes have occurred over time when tests resulted in p-values of p<0.01 and this is denoted by either  $\blacktriangle$  or  $\blacktriangledown$  symbol, to indicate whether the value is higher or lower than in the previous study. We did not account for uncertainty of the RBSA I results and treated them as fixed values. Appendix A provides additional detail and supplemental data tables.

To streamline the results, the report includes only a snapshot of the collected and analyzed data. Readers may select the SEE THE DATA > button (presented throughout the report) to view the detailed tables in the appendix. These tables provide all weighted manufactured home data from the study, with sample sizes and error bounds. In some instances, Cadmus rounded values to whole numbers for better readability. In these instances, values may not sum exactly to 100%.

The RBSA II database contains additional data, including the full data from the inventory of each home. For more details regarding the database go to neea. org/data or www.NEEA.org.

# **Facilitation of Working Group Sessions and Production Pretest**

The RBSA provides data vital for planning and evaluation at the regional, state, and local utility levels. As such, NEEA engaged regional stakeholders in the study design and planning. Cadmus facilitated 10 working group sessions with NEEA funders and other regional stakeholders, including sessions focused on customer contact, sample design, data collection, and database development.

These sessions provided a mechanism for NEEA, Cadmus, and regional stakeholders to review and provide feedback on the proposed methods and activities planned for the RBSA II. Following the working groups, Cadmus delivered a set of interim protocols documenting the agreed-upon approach for all aspects of the RBSA data collection process such as procedures for customer engagement and interactions, the sample design, and the data points collected as part of the RBSA.

As agreed upon with NEEA, the team pretested the recruiting and data collection protocols developed during the working group sessions to ensure that the processes and tools operated as designed. During the pretest period in February 2016, the Cadmus team identified and recommended a number of small changes to improve the recruitment and data collection processes. Over the course of the study, the team made minor adjustments to the original plan, with most changes aimed at improving the recruitment process.

### **Implementing the RBSA II**

The RBSA data collection effort included recruiting and surveying participants, acquiring signed billing release forms, and collecting data on observed equipment and home characteristics. Field technicians recorded observed information on nearly every characteristic that impacts the energy consumption of the home—from construction details to the wattage of light bulbs. The field team implemented lessons learned from the previous RBSA to improve data collection and measurements. These differences are called out throughout the report where applicable.

### **Customer Survey**

Participants completed two short surveys about their home and its occupants: one as a part of a screening and opt-in process and another as part of the site visit. The in-home survey also collected information to help field technicians identify unusual types of equipment they should look for during the site visit such as Wi-Fi enabled equipment, electric vehicles, or seasonal heating and cooling equipment that may be kept in storage.

As the final step of the on-site interview, field technicians recorded the customer's utility (electric and gas) and utility account information and had the customer electronically sign a billing release form.

### **Observed Equipment and Home Characteristics**

The RBSA on-site data collection was wide-ranging and, while the data collected varied based on the type of equipment in the home, generally included these characteristics:

- Building configuration: room square footage and conditioned area and volume
- **Building envelope (shell):** window characteristics, insulation types and thicknesses, and construction materials
- Air leakage: air leakage in cubic feet per minute at 50 pascals, as measured by a blower door test
- HVAC: equipment characteristics, nameplate information, location, and TrueFlow® air handler flow testing and pressure measurements for electric central forced air heating systems
- **Domestic hot water:** equipment characteristics, nameplate information, and flow rate measurements for shower heads and faucets
- Appliances: equipment characteristics (size and configuration) and nameplate information
- Electronics: equipment characteristics and nameplate information
- Lighting: type, style, wattage, quantity, control type, and location

A comprehensive list of the types of equipment information field technicians collected by equipment category and home type and specific details for how field technicians collected data and tested home performance can be found at neea.org/data or go to www.NEEA.org.

### Observed Equipment



















Field technicians conducted wholehome air leakage and HVAC airflow testing.

### **Home Diagnostic Testing**

Through the working groups, Cadmus and NEEA learned that regional stakeholders desired more comprehensive information about whole-home air leakage and HVAC airflow. As such, field technicians performed blower-door testing on all manufactured homes in the study where they could run the test safely, without detracting from participant satisfaction. They also conducted TrueFlow testing and gathered pressure data for households with an electric central forced-air furnace or heat pump as the primary heating system.

A blower-door test measures the amount of air leakage (or air tightness) of a structure, which is a primary determinant of thermal energy efficiency. Air leakage can also affect occupant comfort, indoor air quality, and building durability. Field technicians conducted a two-point blower-door test, striking a balance between the expediency of single-point testing and the greater reliability and accuracy of multipoint testing.

Where practical, field technicians used the TrueFlow Air Handler Flow Meter to collect data and calculate airflow across air handlers in electric central HVAC systems such as furnaces and heat pumps. Considered with other information, such as the condition of the filter and the type and capacity of the current heating system, this data can help assess the adequacy of the duct system for the current system and/or an air source heat pump.

# **Data Cleaning and Building and Equipment Characteristic Analysis**

Throughout the field data collection process, Cadmus performed continuous quality assurance (QA) reviews on data collected for randomly selected homes. The QA reviews focused on critical equipment categories, such as lighting and building construction, and emphasized identifying missing, incomplete, or inconsistent data (i.e., building construction attributes that were inconsistent with the other home characteristics). Where applicable, Cadmus updated data points based on data collection notes, photographs, or product lookup and provided feedback to its technicians to improve data collection.

After completing the site visits, Cadmus cleaned and analyzed the data. This process included reviewing the data for outliers, using field notes and photographs to determine whether a change to a data point was required, and correcting data where appropriate. The final data review also included a systematic review of each home and its equipment to ensure internal consistency. For example, Cadmus compared the type of wall framing to the age of home and reported R-value. If there was a discrepancy between these values, the team investigated the issue further and made appropriate changes if required.

The analysis relied on R statistical software to process, compile tables, and apply case weights to estimate population means and proportions as well as their error bounds. Each end-use table and reported statistic includes data on the associated population estimates and their error bounds (calculated at 90% confidence)

### **Billing Data Collection and Analysis**

Cadmus conducted interviews to capture participant electric and gas billing information such as utility, account number, and meter numbers. Near the end of the field collection phase, Cadmus requested up to 24 months of participant billing data from utilities and reviewed them for completeness and to ensure Cadmus received data for every site, following up directly with utilities for clarification as necessary.

Cadmus performed the following checks to assess the quality of the billing data:

- Reviewed the premise address and accounts for each requested site to ensure they matched those in our database.
- Reviewed the data for inconsistencies such as duplicate reads, multiple readings on the same date, and missing data.
- Reviewed plots of each site's usage data to identify anomalies in the data, such as vacancies or erroneous readings, and removed consumption data and/or further investigated sites as needed.

Cadmus investigated anomalous data and, if possible, corrected the issue. If unable to correct the issue, Cadmus removed the customer from the energy use intensity (EUI) analysis.

The billing analysis relied on a PRISM-type variable-based degree day model. Cadmus used this model to process each home's monthly billing data to produce weather-adjusted annual consumption values. For each household, Cadmus modeled energy usage as a function of heating degree days and cooling degree days, collected from the nearest NOAA weather station. This allowed Cadmus to disaggregate energy into heating, cooling, and baseload components and then apply typical meteorological year (TMY)3 data to these components to derive a normalized annual usage for each household. Finally, to calculate a home's EUI, Cadmus divided the household's normalized usage by the home's conditioned living area.

### **Database**

Results for the RBSA II are derived from data collected through participant surveys, on-site data collection by trained technicians, and historical energy consumption data furnished by regional utilities. Cadmus cleaned, anonymized, and compiled these data, including a number of calculated fields, into a publicly available database. The database includes data from all three housing types—single-family, multifamily, and manufactured—and is available for download through the NEEA website. The RBSA database is a relational database provided in CSV format. Users can import the flat files into other database software (i.e., Access or SQL) or spreadsheet programs such as Excel.

Cadmus also developed a database user manual and data dictionary. The user manual provides guidance on how to effectively use the database and includes instructions for incorporating sampling weights. The data dictionary defines each field in the database and provides example data for each field to give the end user a better idea of what the data mean and represent.

The database and associated documents are available at neea.org/data or go to www.NEEA.org.

Cadmus collected homeowner billing consumption data to develop an energy use intensity (EUI) for each home.

The RBSA II
database contains
complete data from
the inventory of
each home.

 $\mathsf{o}$ 

# Sampling











### **Background**

Cadmus designed the manufactured home sample to achieve the desired level of confidence and precision (90% confidence with ±10% precision) for population estimates within each of four geographic sub-regions. The sampling plan was designed so that these targets and the requisite sample sizes would be met wholly through NEEA project funding. Although NEEA expected some utilities and regional organizations to fund oversamples for their individual service territories, the core sample design accepted by NEEA did not rely on oversamples to meet the desired confidence and precision. This is a key difference between the current study and the previous RBSA; that is, the RBSA I did incorporate an oversample (the BPA oversample) into the core sample design; this study did not.

The following sections describe Cadmus's approach to developing the sample frame, determining the sample sizes for the core and the oversamples, and estimating population quantities using post-stratification to incorporate data from the core and oversamples.

### **Sample Frame Development**

The goal of the manufactured home sample design was to draw samples that were representative of the population within the following four geographic sub-regions:

- Idaho
- Western Montana
- Oregon
- Washington

To ensure that the sample was representative of the target population within each region, Cadmus purchased a randomized address-based sample generated by the U.S. Postal Service (USPS) within each geographic subregion. Cadmus provided USPS with a list of counties and the number of residences required to reach the sample size targets in each geographic region. After identifying the total number of homes in each zip code that were proportional to the population of homes in the region, Cadmus requested those amounts from USPS. That is, if one county represented 50% of the total regional home population, approximately 50% of the address-based sample would be from that county.

### **Core Sample Sizes**

Cadmus determined the sample sizes within each geographic sub-region for the core sample. The team calculated the target sample size within each subregion and then combined them to determine the sample size for the entire region.

Table 1 lists the target and achieved sample sizes for the RBSA II manufactured home core sample by sub-region.

Table 1. Target and Achieved Sample Sizes

Sub-Region	Manufactured Homes			
	Target	Achieved		
Idaho	81	84		
Western Montana	81	83		
Oregon	81	86		
Washington	81	88		
Total	324	341		

# **Bonneville Power Administration Oversample Sample Sizes**

Bonneville Power Administration (BPA) requested oversamples in their service territory to include additional manufactured homes. The Cadmus team calculated the sample sizes for the oversample using the same approach as used for the core sample, with inputs specific to BPA.

Cadmus designed the BPA manufactured home sample to complement the NEEA core sample to achieve the desired level of confidence and precision (90% confidence with ±10% precision) for BPA homes within each of three geographic sub-regions. Based on the population of homes served by BPA, relative to the population in the region, Cadmus predicted the number of homes that would eventually be included in the core sample and reduced the total oversample sample size by that amount. Table 2 shows the resulting oversample sample sizes for BPA.

Table 2. BPA Oversample Sample Sizes

Sub-Region	ВРА
Idaho/Western Montana	2
Oregon	22
Washington	46
Totals	70

The goal of the manufactured home sample design was to draw samples that were representative of the population within four sub-regions.

12

### **Sampling Weights**

Cadmus used stratified sampling to select households for the core sample where strata were defined by geographic sub-regions. Cadmus calculated and applied sampling weights to estimate the overall population quantities and ensure that observations are weighted in proportion to the population represented by the sample. The oversamples introduced additional sampling within each core stratum and, thereby, the need for an adjustment to the core stratified sampling weights to account for sample size increases in the oversampled territories.

Cadmus used post-stratification to account for the combination of stratified sampling in the core and the additional sampling in the oversamples.

To post-stratify, Cadmus divided each sub-region into BPA and non-BPA territories. When the data was available, Cadmus used additional information on service territories to determine the most accurate population sizes for each site in the sample. Cadmus determined the population sizes in each post-stratification stratum based on home data from the 2014 American Community Survey (ACS) and achieved sample sizes.


The Cadmus team mapped home population sizes from the ACS data to the zip codes in each sub-region and service territory to determine stratum population sizes and counted the achieved sample sizes in each stratum. The team applied sampling weights to all observations within each stratum to estimate population totals, means, and proportions.

Table 3 lists the post-stratification strata within each sub-region.

Table 3. Post-Stratification by Sub-Region

Sub-Region	Recruitment Strata	Post-Stratification Strata
Western Montana	Western Montana	Bonneville Power
western wontana	Western Montana	<ul> <li>Non-Bonneville</li> </ul>
Idaho	Idaho	Bonneville Power
	luario	Non-Bonneville
	Footowe Modelington	Bonneville Power
	Eastern Washington	<ul> <li>Non-Bonneville</li> </ul>
	Mastern Maskinsker	Bonneville Power
Washington	Western Washington	<ul> <li>Non-Bonneville</li> </ul>
	Durant Carried	Bonneville Power
	Puget Sound	<ul> <li>Non-Bonneville</li> </ul>
	5t O	Bonneville Power
Oregon -	Eastern Oregon	<ul> <li>Non-Bonneville</li> </ul>
	\\\t	Bonneville Power
	Western Oregon	Non-Bonneville

The following maps show the distribution of manufactured site visits across Idaho, Western Montana, Oregon, and Washington by NEEA's core RBSA II sample, as well as the BPA oversample homes.

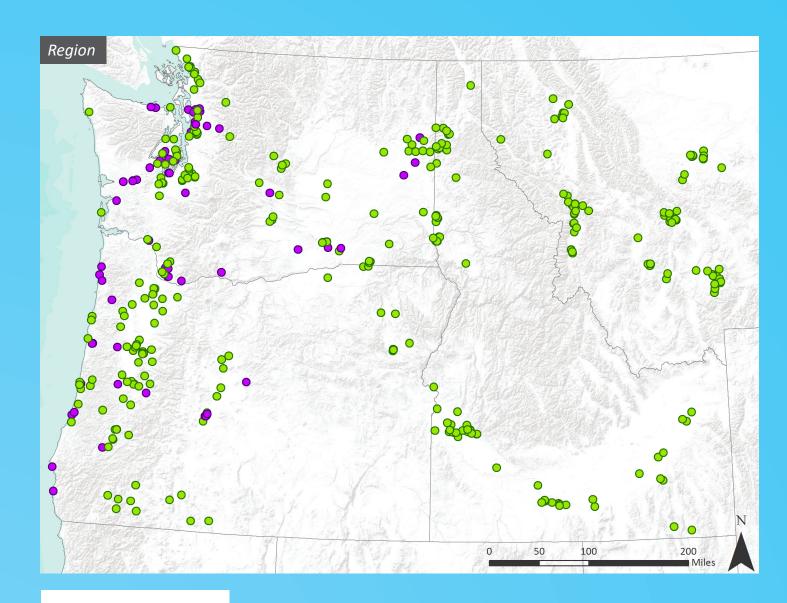

- BPA Oversample
- NEEA Core



# SUMMARY OF BUILDING CHARACTERISTICS

The following sections provide detailed findings by manufactured home characteristic, measurement, and end use. All values in these sections are weighted. These findings represent notable and statistically significant differences between the RBSA II and the previous RBSA, and in some situations, the emergence of new or different technologies not observed in RBSA I.

Where practical, these sections also highlight key differences between the RBSA II and RBSA I. Differences that are statistically significant are denoted by either an ▲ or ▼ symbol, to indicate whether the value is higher or lower than in the previous study. Where Cadmus observed new or different technologies, or if we developed tables for this RBSA that were not present in the RBSA I, we did not conduct statistical significance testing.

Appendix A provides additional detail and supplemental data tables, as well as references to comparable RBSA I table numbers.



### **Key Findings**

# Age and Type

The RBSA II defined manufactured homes according to the Northwest Power and Conservation Council's definition, the same definition used in RBSA I. Explicitly, manufactured homes are factory-built homes constructed in accordance with the Federal Manufactured Home Standards. The terms single-wide, double-wide, and triple-wide refer to homes built in a controlled environment on a permanent chassis and brought to the site in one, two, or three sections, respectively. The term modular or pre-fab refers to a home built in a controlled environment and assembled on site, but not attached to a permanent chassis.

Cadmus identified the age of the home first by asking the participant and then verifying through online sources.

Key findings for home type and vintage include:


- Three decades stand out where new manufactured homes construction spiked (1970s through 2000), and these spikes are consistent for all states. The spike is most pronounced in Idaho, with nearly half of the observed homes in Idaho constructed in the 1990s. There is a noticeable decline in new manufactured homes after 2000, which is consistent with the last RBSA.
- Cadmus conducted over 90% of RBSA II site visits in single and double wide homes, which is similar to the previous RBSA. There was an increase in site visits to double wide (12%) and decrease in site visits to single-wide homes (10%) compared to the previous RBSA.

### Distribution of Homes by Vintage and State

	•	•	•	•	•	•	•		
	Pre 1951	1951- 1960	1961- 1970	1971- 1980	1981- 1990	1991- 2000	2001- 2010	Post 2010	Total
ID	1%	0%	4%	24%	15%	46%▲	7%	3%	100%
MT	1%	2%	11%	28%	10%	36%▲	13%	0%	100%
OR	0%	0%	6%	23%	18%	39%	12%	2%	100%
WA	1%	1%	10%	29%	19%▼	27%	11%	2%	100%
	0%▲	1%	8%	26%	18%▼	34%▲	11%	2%	100%

SEE THE DATA

### Distribution of Homes by Type and State

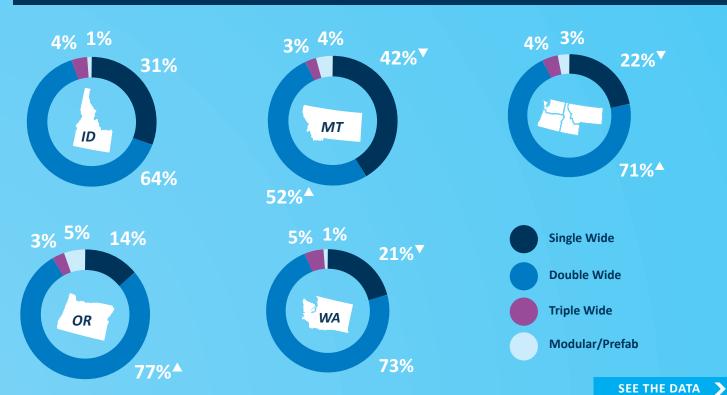



### **Key Findings**

# Building Envelope

The building envelope comprises the surfaces and insulation that separate conditioned space from the outdoors and is a key determinant of the energy use of any building. Field data collection for manufactured homes included characterization of envelope components including ceilings, walls, floors, and windows and doors.

Manufactured homes often present barriers to collecting information about insulation through direct observation. For instance, the small attic space above the ceiling is often inaccessible, and floor insulation is protected by a thick "belly" membrane that can make direct observation challenging at best. Field technicians used a variety of technique to attempt characterization of insulation through direct observation. With exterior walls, field technicians used a combination of infrared thermography and probing around electrical boxes to determine whether a surface was insulated. Probing also often allowed an estimate of the thickness of wall insulation. Infrared thermography also sometimes allowed a determination of the completeness of attic insulation when no attic access was available. Where practical, field technicians observed the underside of the home to attempt to determine insulation type and thickness, and to look for signs that the floor insulation had been upgraded.


Where characterization through direct observation was not practical, the RBSA II study used manufactured home construction standards to infer insulation levels. With homes that included labels documenting compliance with relevant construction standards, field technicians noted the insulation levels provided on these labels. Represented programs or authorities include the U.S. Department of Urban Development (HUD), ENERGY STAR Certified Manufactured Homes, and the Northwest Energy Efficient Manufactured (NEEM) Housing Program. Labeled insulation levels were assumed accurate for the home except in cases where direct observation revealed different information. Consistent with RBSA I, where no label was present, the RBSA II assumed a construction standard consistent with the home's age and with information gathered through direction observation.

Key findings for manufactured home building envelope include:

- Ceiling insulation has changed little since RBSA I overall, though RBSA II shows significantly more with R-22 and R-30. Additionally a lower percentage of homes appear to have ceiling insulation levels of R-31
- The RBSA II data also show little change in manufactured home wall insulation. The table at right shows manufactured wall insulation by state, which was not reported in RBSA I. Idaho showed the highest percentage of homes with at least R-15 wall insulation, followed by Oregon and Washington.

### Distribution of Attic Insulation R-Value

HUD construction standards ensure that manufactured homes built since 1976 have at least R-11 ceiling insulation. More recent standards require from R-22 to R-40.

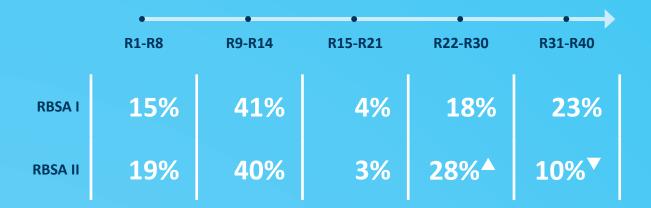

SEE THE DATA

### Distribution of Wall Insulation R-Value by State

Across the region, 82% of manufactured homes have at least R-9 wall insulation.

	ID	МТ	OR	WA	
R0-R8	12%	15%	14%	22%	18%
R9-R14	51%	69%	60%	54%	57%
R15-R21	35%	16%	26%	24%	25%
R22-R30	1%	0%	0%	0%	0%
Total	100%	100%	100%	100%	100%





### Key Findings

21

# Air Leakage

High air leakage in homes squanders energy as conditioned air leaks to outside. It can also lead to occupant discomfort and to moisture-related problems caused by condensation as warm air from inside meets cold surfaces inside walls, attics, or crawlspaces. Where safety protocols allowed, field technicians conducted a blower door test on homes to provide a measure of air leakage.

As prescribed by study protocols, field technicians used a two-point process for conducting the blower door tests, meaning results were measured at two house pressures—roughly 25 pascals and 50 pascals. These data allowed calculation of two commonly used indications of the air tightness of a building: air leakage in cubic feet per minute (CFM) at 50 pascals—denoted CFM50—and air changes per hour at 50 pascals, which is commonly denoted as ACH50. A two-point blower door test allows calculation of an approximation of the slope of the flow curve for each site, which must be assumed when testing at a single pressure. This increased the accuracy of results and allowed a level of quality assurance during testing.


For sites that met eligibility criteria and where practical, visits included a test of airflow across the air handler using the Energy Conservatory's TrueFlow Air Handler Flow Meter. Eligibility requirements included that the primary heating system use electricity as the heat source and that the system configuration allowed a TrueFlow plate to be placed at or near the air handler.

Key findings for homes air tightness include:

- The RBSA II blower door data show less air leakage on average across the
  region. The RBSA II weighted regional average of 8.9 ACH50 represents
  75% of the RBSA I average. This reduction is likely, in part, from home
  improvements such as air sealing, installation of high-efficiency sealed
  combustion furnaces, and window replacement.
- RBSA II blower door data show higher ACH50 for manufactured homes in Montana than the other three states, indicating more air leakage on average in those homes. As expected, air leakage is higher on average with older homes, with average ACH50 ranging from 5.3 for homes built after 2001 to 16.2 for homes built between 1961 and 1970.
- During TrueFlow testing, air source heat pumps averaged 344 CFM per ton of heating capacity across the region, and electric forced air furnaces averaged 189. The report Appendix A includes summary tables of TrueFlow results. The RBSA II database shows results for each home, along with other relevant information.

### Blower Door Air Tightness (ACH50) by State


RBSA II blower door testing showed **less air leakage** on average than the previous RBSA.

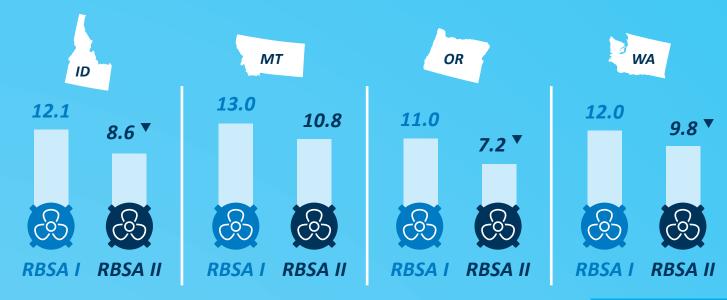

SEE THE DATA

### Blower Door Air Tightness (ACH50) by Home Vintage

Air leakage is higher on average with older homes.

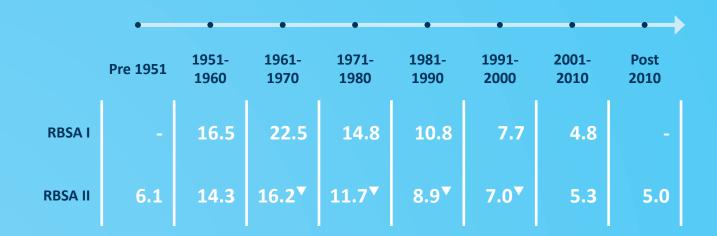



### Code Updates

### **Key Findings**

# **HVAC Systems**

Data collection included extensive characterization of the heating, cooling, and ventilation equipment in each home. These systems include central equipment such as forced-air furnaces and heat pumps as well as zonal equipment such as baseboard heaters, heating stoves, and ductless mini-split heat pumps. Field technicians also collected information such as the make, model number, capacity, and year of manufacture of heating and cooling equipment where practical. Where year of manufacture was not included on the manufacturer's label, technicians collected serial number data, which often included encoding that allowed the team to determine the year of manufacture after the site visit. Where practical, Cadmus also used post-visit lookups to provide equipment efficiency ratings. The RBSA II groups electric baseboard and wall heaters together but characterizes electric ceiling heat and other zonal systems as Other Zonal Heat.


Changes in federal efficiency standards since the last RBSA mandate higher minimum efficiency ratings for some HVAC equipment. For instance, as of November 19, 2015, the minimum annual fuel utilization efficiency (AFUE) of mobile home gas furnaces increased from 75 to 80, and the AFUE of other non-weatherized furnaces increased from 78 to 80. As of January 1, 2015, the minimum seasonal energy efficiency ratio (SEER) of split system heat pumps increased from 13 to 14, and the minimum heating seasonal performance factor (HSPF) increased from 7.7 to 8.2.


Key findings for HVAC include:

- Two notable changes were observed in primary heating systems: first, use of heating stoves and fireplaces as the primary heating system decreased from 17% to 12%, and second, use of central air source heat pumps increased from 14% to 24%.
- For mechanically cooled homes, the percentage of households using an air source heat pump increased from 33% in RBSA I to 45% in RBSA II.
- The percentage of homes using some type of mechanical cooling increased from 54% to 67%. An increase in the use, or identification, of portable air conditioners, packaged air conditioners (window units), and ductless heat pumps appears to account for this difference.

### **Distribution of Primary Heating Systems**

Notable changes in primary heating systems included an increase in the number of air source heat pumps as well as a decrease in heating stoves and fireplaces.

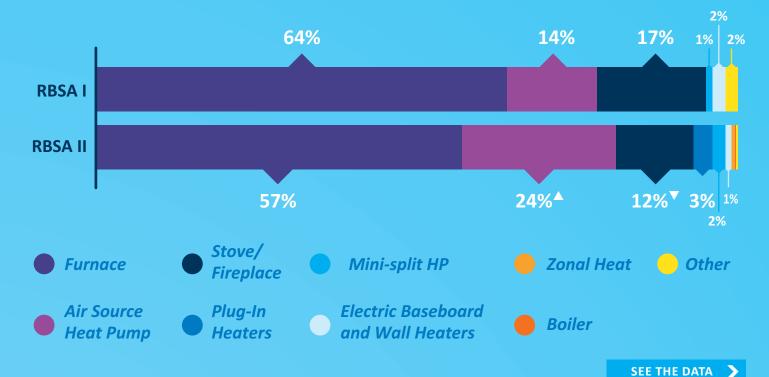

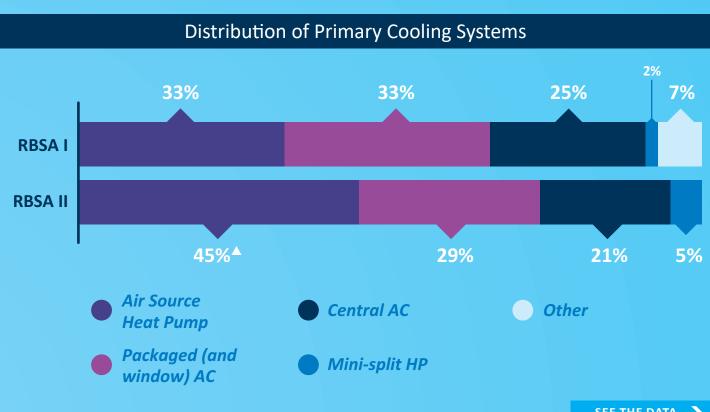

### Distribution of Primary Heating Fuel Type by State


Primary heating fuel remained largely the same except for wood fuel usage, which decreased from 14% to 9%.

	ID	MT	OR	WA		
Electric	59%	13%	77%	82%	71%	*
Gas	24%	52%	11%	7%	14%	
Oil/Kerosene	3%	0%	1%	0%	1%	
Propane	5%	16%	0%	2%	3%	Ō
Wood	7%▼	15%	9%	7%▼	9%▼	*
Pellets	2%	4%	2%	2%	2%	N.
Total	100%	100%	100%	100%	100%	

SEE THE DATA

Percent of Homes with Cooling Equipment (All Systems and Cooling Zones)

More homeowners are mechanically cooling their homes.

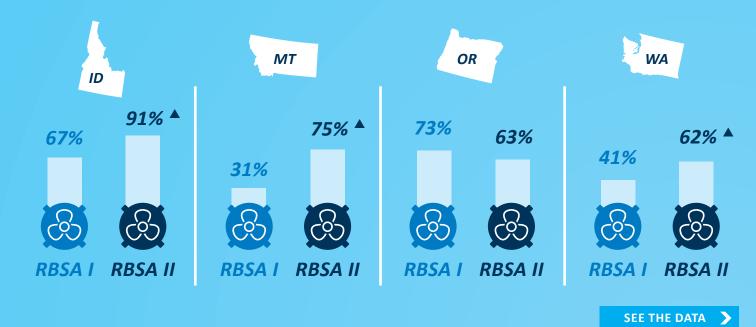


### Average Heating and Cooling Equipment Efficiency Ratings

### Heating and cooling equipment are trending toward greater efficiency.



### Distribution of Thermostats by Type

Connected thermostats represent only 3% of installed thermostats.

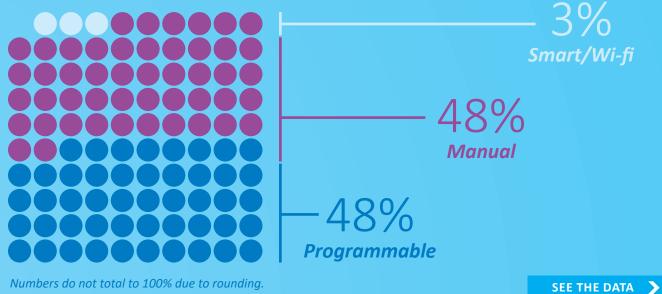



### **Code Updates**

### **Key Findings**

# Lighting

Lighting data collection is a highly involved process, encompassing lighting inside and outside the residence as well as equipment kept in storage. Cadmus conducted a comprehensive lighting walk-through that captured details about lighting in every room accessible to the field technician. These details include lamp type, style, wattage, quantity, control, and location. In addition to bulbs currently installed, field technicians identified and recorded bulbs in storage.

To ensure all relevant data were collected, field technicians performed a systematic walk-through of the home, documenting control types, fixtures, lamp attributes, and quantities. They began the process by asking the resident about spare bulbs and recording bulb type and quantities. Identifying the type of bulb can be difficult due to accessibility or safety issues and the fact that many bulbs today look like incandescent but are in fact something different, such as a halogen. Where field technicians could not accurately assess the bulb type, they noted it as unknown.

Collecting information about LEDs and connected lighting, or lighting with an element of connectivity or intelligence, was new to this RBSA.


The Energy Independence and Security Act of 2007 was phased in beginning in 2012. This standard impacted many lamps that would have been targets of utility lighting programs and likely accelerated the adoption of energy efficient light bulbs.

Key findings for homes lighting include:

- Regional lighting stock changed dramatically since the RBSA I. Most notably, LEDs represent a significant share of installed bulbs in manufactured homes (18% regionally). This is a substantial increase from the RBSA I, where LEDs were not found in sufficient quantities to be included in report tables.
- The percentage of incandescent lamps in use across the region decreased from 59% to 39%. Other bulb types such as CFLs and halogens remained about the same, with insignificant changes in proportional share.
- Connected lighting, bulbs that connect to the home Wi-Fi, were found in 2% of homes.

### Average Distribution of Lamp Type by RBSA Study

Almost half (45%) of all light bulbs are now either a CFL or LED compared to just 28% (all CFLs) in the RBSA I study.

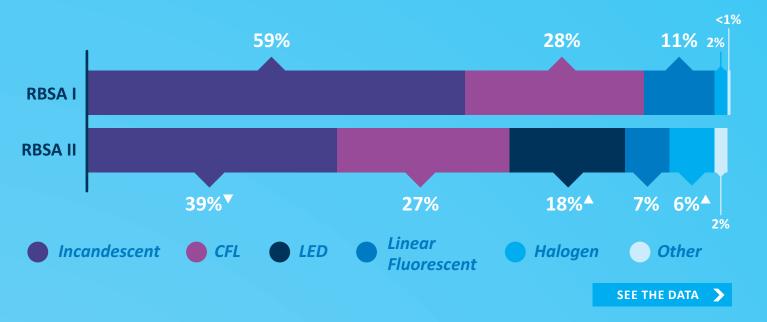

### Distribution of Lamp Type by State

The proportion of installed LED lamps ranged from 6% in Montana to 21% in Oregon.

	ID	MT	OR	WA	
Compact Fluorescent	31%	29%	24%	28%	27%
Halogen		6%	6%	7%	6%▼
Incandescent	43%▼	46%▼	39%▼	37%▼	39%▼
Incandescent/ Halogen¹	1%	0%	1%	0%	0%
Light Emitting Diode	12%▲	6%	21%▲	20%▲	18%▲
Linear Fluorescent	6%	12%	7%	7%	7%
Other	1%	1%	2%	2%	2%
Total	100%	100%	100%	100%	100%

 $<sup>^{1}</sup>$ In some instances, field technicians could not differentiate between incandescent or halogen.

### LEDs are installed throughout the home.

### The highest concentration of LEDs can be found in family rooms.

### BEDROOM

CFL **31%** Halogen **6%**▲ Incandescent 43%<sup>▼</sup> LED **16%**▲ Linear Fluorescent 1%

### CLOSET

CFL **34%**▲ Halogen 4%▲ Incandescent 47%<sup>▼</sup> LED **11%**▲ Linear Fluorescent 3%<sup>▼</sup>

### BATHROOM

CFL **26**%

Halogen **6%**▲ Incandescent 47%<sup>▼</sup> LED **14%**▲ Linear Fluorescent 2%

### KITCHEN

CFL **21%**▼ Halogen 7% Incandescent 25%<sup>▼</sup> LED **19%**▲ Linear Fluorescent 26%

### OFFICE

CFL **26%**▼ Halogen 8%▲ Incandescent 36%<sup>▼</sup> LED **22%**▲ Linear Fluorescent 8%<sup>▼</sup>

### OTHER

CFL **21%** Halogen 6% Incandescent 29%<sup>▼</sup> LED **9%**▲ Linear Fluorescent **34**%<sup>▼</sup>

### HALL

CFL 38% Halogen **6%**▲ Incandescent 37%<sup>▼</sup> LED **14%**▲ Linear Fluorescent 3%

### FAMILY/LIVING/ DINING ROOM

CFL 28%<sup>▼</sup> Halogen **6**%▲ Incandescent 43%<sup>▼</sup> LED **18%**▲ Linear Fluorescent 2%<sup>▼</sup>

### LAUNDRY

CFL 32% Halogen 2% Incandescent 33%<sup>▼</sup> LED 18%▲ Linear Fluorescent 14%

### GARAGE

▲ ▼ Statistically different from 2011 RBSA


CFL 10% Halogen 2% Incandescent 12%<sup>▼</sup> LED 14%▲ Linear Fluorescent 60%

### OUTSIDE

CFL **24**% Halogen 10% Incandescent 35%<sup>▼</sup> LED **25%**▲ Linear Fluorescent 2%<sup>▼</sup>


### Percent of Homes with CFLs and LEDs by State

Almost every home has at least one CFL; more than 67% of Northwest homes have one or more LEDs.

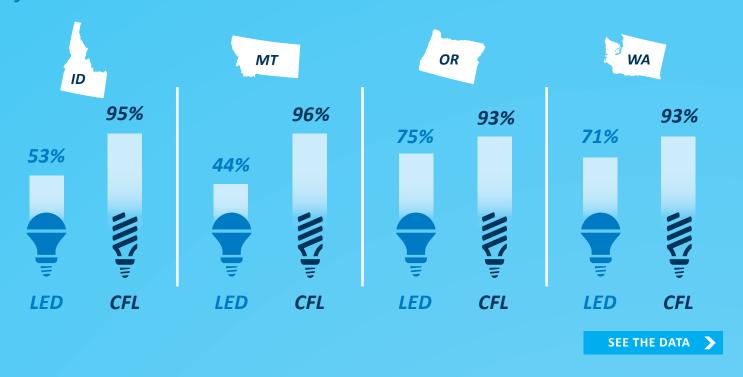

### Distribution of Stored Bulbs

Of bulbs not in use (in storage), incandescent bulbs represent the **highest quantity**, followed by CFLs.

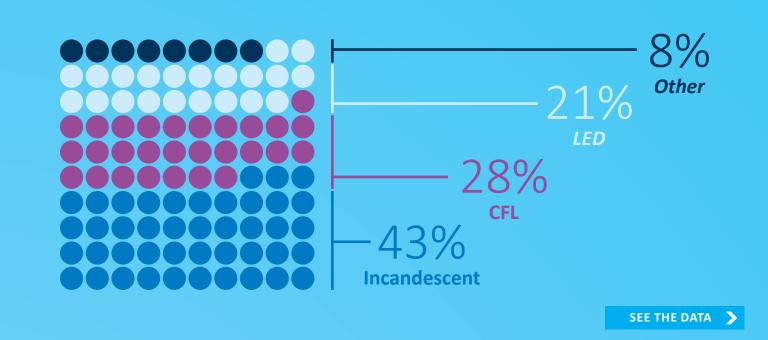

### Home Lighting Power Density by Study

Due to the shift from inefficient incandescent bulbs to LEDs, the lighting power density (watt per sq. ft.) decreased from 1.3 to 0.9. 

▼





SEE THE DATA

### LED Installed by Owner Versus Renter

Homeowners are more likely than renters to have at least one LED installed.





### **Code Updates**

### **Key Findings**

# **Appliances**

The appliance data collection identified and characterized appliances in each manufactured home, including kitchen and laundry appliances. This section includes distribution of appliances by state and region, specific characteristics such as age and size, and appliance configurations such as door position for refrigerators. In many instances, Cadmus identified characteristic data such as age, efficiency, and size after the site visit through a combination of databases and other secondary sources.

For the first time, the RBSA II collected information about connected appliances (that is, appliances that are connected to the homes' Wi-Fi). In addition to identifying the presence of clothes dryers and fuel type, the RBSA II captured more information regarding clothes dryer configurations and other details (included in Appendix A).


Federal energy efficiency standards can have a significant impact on appliance stock and efficiencies in particular. There have been a few federal efficiency standard changes since the previous RBSA. Appliances impacted by federal efficiency changes include the following equipment:

- Refrigerators and freezers (effective 2014)
- Dehumidifiers (effective 2012)
- Clothes washers and dryers (effective 2015)
- Dishwashers (effective 2013)

Key findings for appliances include:

- Appliance distributions, types, and efficiencies show some shift since the last RBSA. For instance, the distribution of clothes washer and refrigerator efficiencies and configurations changed.
- The average appliance age was approximately 10 years, with 34%
   of dishwashers and 21% of clothes washers beyond their expected
   useful life. Expected useful life is based on Regional Technical Forum
   assumptions and ranges from 12 to 22 years, depending on the
   appliance.
- There were significant shifts in refrigerator configuration types: refrigerators with top freezers declined the most since the previous RBSA, and side-by-side refrigerators with bottom freezers increased the most. In general, side-by-side configuration refrigerators have been shown to consume more energy than single-door units when all else is equal.

### Average Number of Appliances per Home

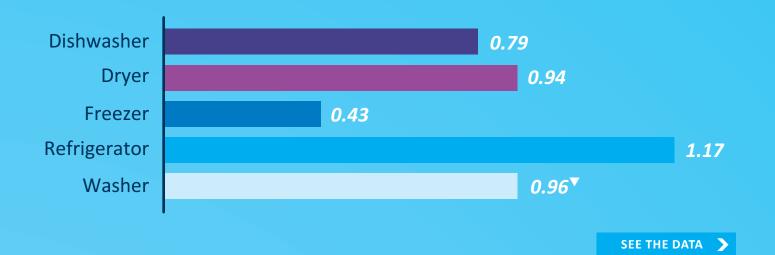


### Distribution of Clothes Washer Types

Horizontal and vertical axis (without agitator) washers increased from a combined share of **24% to 38%** across the region.

	ID	МТ	OR	WA	
Horizontal Axis	24%	16%	26%	31%	27%▲
Vertical Axis (with agitator)	67%	67%	59%▼	59%	61%▲
Vertical Axis (without agitator)	9%	16%▲	13%	10%	11%▲


### Distribution of Clothes Dryer Fuel Types

The RBSA II found 97% of dryers are electric, followed by natural gas (2%) and propane (1%).

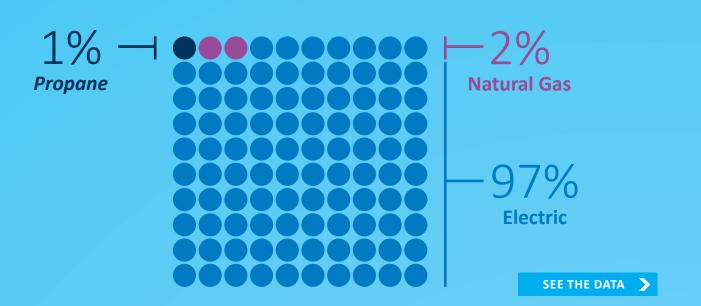


### Distribution of Refrigerators by Type

There were significant shifts in refrigerator configuration types.

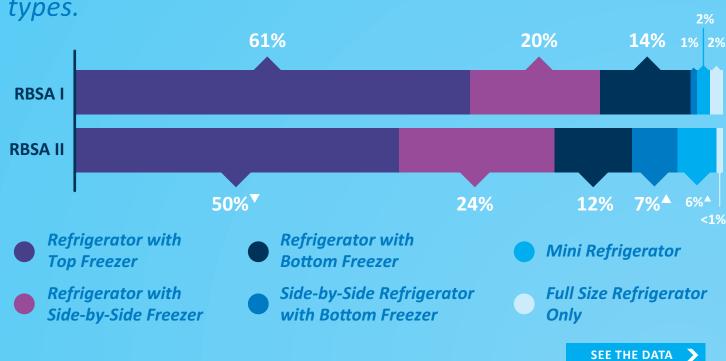


### Appliance Age

Roughly 37% to 48% of appliances were manufactured in 2010 or later.

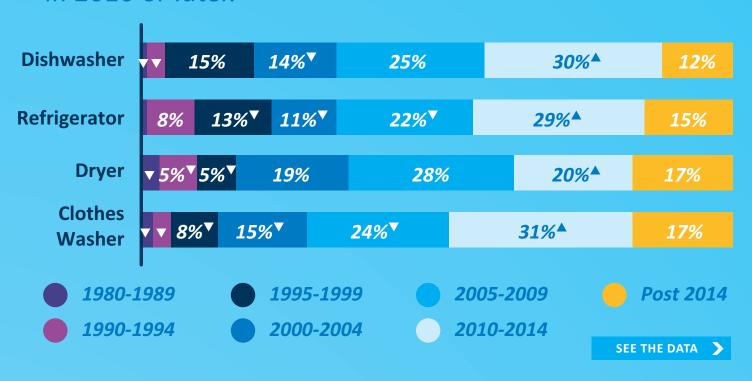

### Proportion of Equipment Past Effective Useful Life

A substantial proportion of appliances are past their expected useful life.

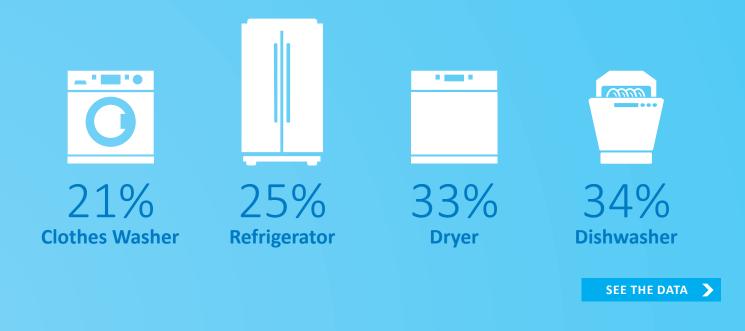



### **Code Updates**

### **Key Findings**

### Water End-Uses

Field technicians identified and characterized water heaters in each home. Specifically, they collected information regarding the water heater type, size, fuel, make, model, input capacity, and location. Location is especially important for heat pump water heaters (HPWHs) because the location may affect not only how much energy is required to heat water, but also how much energy is required to heat and cool the home. For example, the HPWH will have less impact on heating and cooling the farther it is from the thermostat and the more thermal buffers that exist between it and the thermostat. However, HPWH efficiency will decline in winter if the water heater is located outside of the thermal boundary. The RBSA II did not directly capture the distances and thermal buffers, but field technicians noted where electric water heaters were located by room type. Collected data also included additional information such as ceiling height near the water heater and proximity to exterior walls for running vent ducts. This may help programs identify how many electric water heaters can be easily replaced with HPWHs.

Field technicians also conducted a thorough walk-through for showerheads and faucet aerators. For these end uses, technicians captured the rated flowrate (if available) and measured flowrate using predetermined procedures and equipment. The end uses were classified as primary, secondary, or used about the same.


Federal energy efficiency standards can have a significant impact on water heater efficiencies. New federal efficiency changes for water heaters went into effect in 2015.

Key findings for water end-uses include:

- Water heater fuel and type remained relatively the same as the previous RBSA.
- Though not statistically significant, the share of instantaneous water heaters increased from 1% to 2%. HPWHs represent less than 1% of water heaters.
- 76% of water heaters are located in the main part of the home.

### Distribution of Water Heater Fuel Type by State


Water heater fuel type remained relatively **unchanged** from RBSA I.

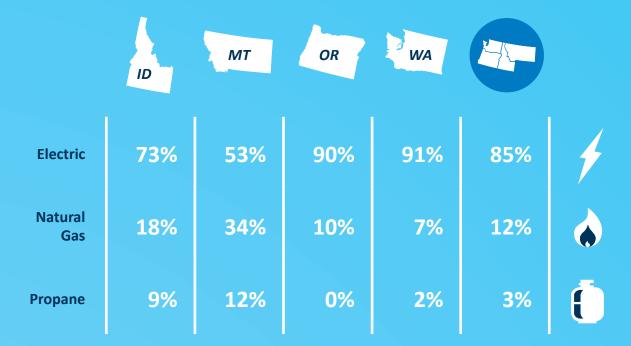

SEE THE DATA

### Distribution of Water Heater Type

Heat pump water heaters account for less than 1% of water heaters in manufactured homes.

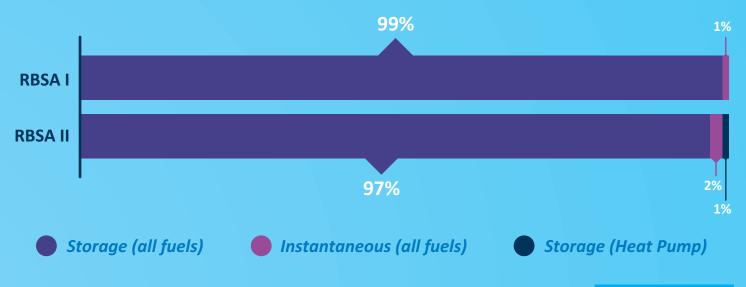

### Distribution of Shower and Faucet Flow Rates (GPM)

Bath



Kitchen



55% are below 2.2 GPM



56% are below 2.5 GPM




63% are below 2.2 GPM

SEE THE DATA

### Average Number of Showerheads and Faucets Per Home



Manufactured homes have 2.0 bathroom sinks, 0.5 standalone showers, and 0.9 shower and bath combo units

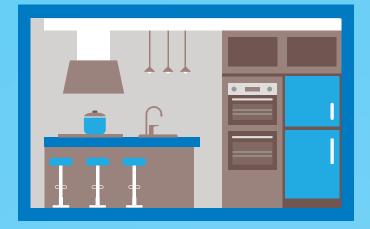

On average, homes have **1.0** kitchen sinks

SEE THE DATA

This page intentionally left blank.

▲ ▼ Statistically different from 2011 RBSA



### Key Findings

# Electronics

The electronics walk-through identified and characterized electronics in each home. Equipment captured included a range of electronic devices from televisions to computers. Field technicians did not include portable devices such as iPads and phones because of their general mobility. This section includes distribution of electronics by state and region, along with specific characteristics such as size, type, and usage. In some instances, Cadmus identified characteristic data such as efficiency and size after the site visit by searching a third-party database, manufacturer data sheets, or other online resources.


The walk-through also included capturing information regarding power strips and auxiliary items that may be plugged into them. Field technicians measured the television wattage whenever possible, using a plug-through power meter, and recorded the presence of television peripherals such as Roku, Fire Stick, and Apple TV devices. Technicians asked participants about usage patterns (e.g., how many hours per day each television is typically on).

Key electronic findings include:

- There have been many advancements in television technology since the last RBSA. Cathode ray tube televisions represented over half of all televisions found in manufactured homes since the last RBSA, whereas currently they represent only 11% of televisions, with LED and LCD televisions representing over three-quarters of what is currently installed in homes.
- Set-top boxes and audio systems are declining in numbers. The
  number of homes with set-top boxes declined from 79% in RBSA I
  to 67% in RBSA II. Audio systems per home saw a significant decline
  from 1.3 per home to fewer than one per home (0.5) on average.
  These changes are likely due to the popularity of web-enabled
  televisions and streaming services such as Netflix and Spotify.

### Distribution of Television Screen Types

Over three-quarters of televisions now use LED or LCD technology.

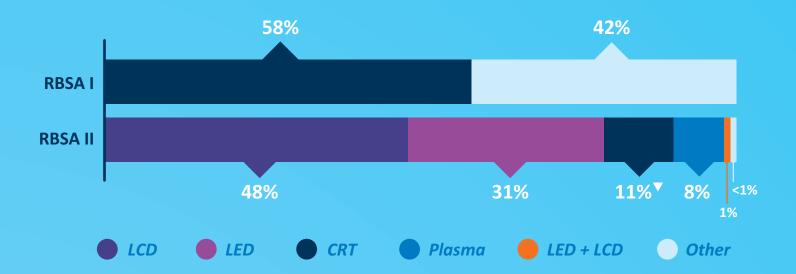

SEE THE DATA

### **Television Power Draw**

The average television power dropped by 23W from 103W to 80W over the past 6 years


### Percent of Homes with Game Consoles

The percentage of homes with gaming systems remained about the same.




SEE THE DATA

### Percent of Homes with Set-Top Boxes

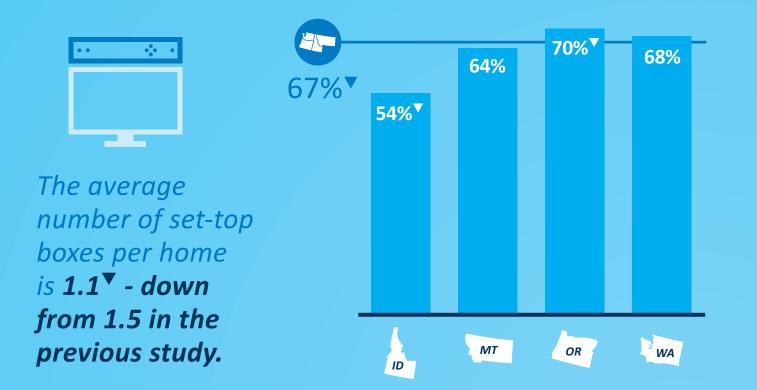

SEE THE DATA

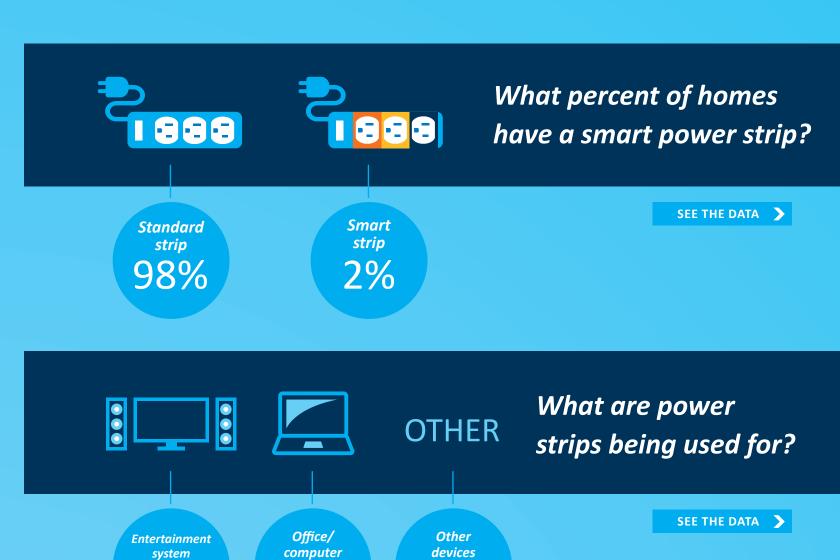

devices

22%

29%

system



### **Key Findings**

# Energy Benchmarking

Similar to the previous RBSA, the RBSA II provides an opportunity to calculate energy-use intensity (EUI) profiles. Cadmus conducted the RBSA II billing analysis using procedures and methods similar to those used for the previous study to allow for direct comparison of the results. Cadmus requested 24 months of electric and gas billing data for all 411 manufactured home participants. However, Cadmus ultimately removed 46 sites for several reasons: the utilities did not provide billing information (most common), inconsistencies in data collection such as multiple readings on the same date or missing reads, or anomalies in the data such as lengthy vacancies or apparently erroneous readings. In the end, the analysis included billing data for 365 electric and 69 gas participants.

Key energy usage findings include:

- Average electric usage per home decreased for the region as well as in Idaho and Washington. Montana and Oregon remained relatively unchanged.
- Gas usage per home remained unchanged except for Montana, which had a decrease in gas usage.
- Annual electric usage per square foot declined for all states except Montana.
- Gas EUI decreased in all states except Idaho.
- Higher electric EUIs were largely driven by whether a home had electric heating and electric water heating. Homes with large conditioned areas had lower EUIs. Variables such as efficient lighting and percentage of mechanical cooling did not vary much across quartiles.

### Average EUI by State and Fuel Type

	ID	МТ	OR	WA	
Electric EUI per Home (kWh/sq.ft)	11.6▼	10.1	9.8▼	10.7▼	10.5▼
Gas EUI per Home (therm/sq.ft)	0.4	0.5▼	0.3▼	0.4▼	0.4▼
Other Fuel EUI per Home (kBtu/sq.ft)	9.9	21.0	10.2	5.5▼	8.9

SEE THE DATA

### **Electric EUI Quartiles and Corresponding Housing Characteristics**

	Conditioned Area	Electric Heat	Efficient Lighting	Air Conditioning	Electric Hot Water
EUI Quartile 1 (<6.33)	1,666	40%	40%	60%	51%
EUI Quartile 2 (6.33-10.07)	1,433	71%	42%	79%	78%
EUI Quartile 3 (10.07-13.73)	1,301	79%	47%	80%	89%
EUI Quartile 4 (>13.73)	1,154	84%	43%	60%	85%





**Key Findings** 

# Conservation, Purchases, and Miscellaneous Loads

As part of the recruitment process, recruitment specialists asked a series of questions related to household purchases and energy efficiency awareness. Specifically, specialists inquired if households had participated in rebate programs and, if so, which ones and what the participant purchased. The recruitment specialists also asked if participants received any federal, state, or local tax credits, or if they completed a home energy assessment in the past two years. Finally, specialists asked participants whether they or a landlord pay their gas and electrical bills and whether they receive financial assistance for their utility bills (and if so, what portion of the bill is covered by financial assistance).


Data collection also captured information about miscellaneous and uncommon loads such as electric vehicle chargers, solar panels, smart home devices, well pumps, and pool and sauna equipment.


Key conservation, awareness, and miscellaneous findings include:

- A higher percentage of participants reported implementing conservation improvements without utility incentives in the past two years in this study compared to the previous RBSA (56% and 33%, respectively). This upward trend was true for all states except for Montana, which remained about the same. Out of the participants reporting some sort of energy efficient home improvement, fewer reported receiving an incentive from their utility (approximately 11% for the region) than in the last RBSA.
- Less than 1% of manufactured homes have solar panels. Field technicians identified a small number of homes, two in total, with electric vehicles present.
- Technicians also asked homeowners if they use or access any type of smart home device (such as a smart speaker like Google Home). Approximately 3% of homeowners responded to having such devices, with Idaho having the highest percentage of smart device users (4%).


Percent of Participants Reporting
They Implemented Some Kind
of Self-Funded Conservation
Improvement

Percent of Participants
Reporting They Received State
or Federal Tax Credit for an
Energy Efficient Upgrade

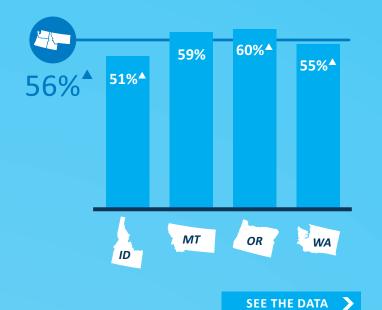

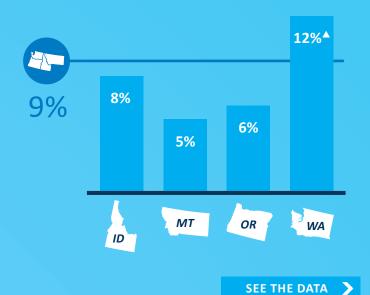

Percent of Participants Reporting
Use of Utility Incentives

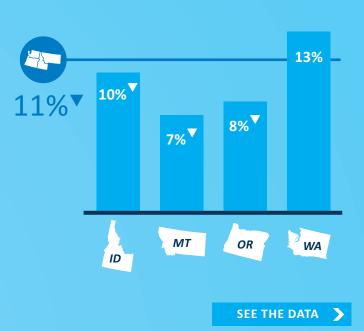

▲ ▼ Statistically different from 2011 RBSA 48



Less than 1% of manufactured homes have solar panels.

SEE THE DATA



Less than 1% of households have electric vehicles

SEE THE DATA



3% of participants indicated they use any type of smart home device (such as a smart speaker)

SEE THE DATA



**4.5%** of participants reported completing a home energy audit in the past 2 years

**SEE THE DATA** 

This page intentionally left blank.

▲ ▼ Statistically different from 2011 RBSA



# RESIDENTIAL BUILDING STOCK ASSESSMENTAPPENDIX A: Report Tables

# Introduction

This appendix presents findings for manufactured homes based on data collected for the core RBSA II study (funded by NEEA) and on data collected for an oversample funded by the Bonneville Power Administration. Cadmus developed and applied sampling weights to ensure that all manufactured home observations were weighted proportionally to the segment of the population represented by the sample; see the Database User Manual for a description of the weighting methods and procedures.

Where possible, Cadmus benchmarked the findings of the RBSA II against the findings presented in the RBSA I. Statistically significant differences between the two reports are denoted by either a ▲ or ▼ symbol, to indicate whether the RBSA II value is higher or lower than the value in the RBSA I study. This appendix identifies which table in the previous study was used to draw conclusions about each statistically significant difference.

New tables presented in this document that do not have a corollary in the RBSA I study do not have symbols indicating statistically significant increases or decreases from RBSA I, though statistically significant differences may exist. Without a comparable table in the RBSA I report, statistical testing could not be performed.

# **Contents**

Table 1. DISTRIBUTION OF HOMES BY TYPE AND STATE	8
Table 2. DISTRIBUTION OF HOMES BY VINTAGE AND STATE	9
Table 3. DISTRIBUTION OF HOMES BY AGE, CONSTRUCTION STANDARD, AND STATE	10
Table 4. AVERAGE CONDITIONED FLOOR AREA BY STATE	10
Table 5. AVERAGE CONDITIONED FLOOR AREA BY VINTAGE AND STATE	11
Table 6. AVERAGE NUMBER OF BEDROOMS PER HOME BY STATE	11
Table 7. AVERAGE NUMBER OF BATHROOMS PER HOME BY STATE	12
Table 8. AVERAGE ROOM AREAS BY ROOM TYPE	12
Table 9. BASELINE COMPONENT ASSUMPTIONS BY AGE/STANDARD	13
Table 10. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE	13
Table 11. DISTRIBUTION OF WALL U-VALUE BY STATE	14
Table 12. DISTRIBUTION OF WALL INSULATION LEVELS BY STATE	14
Table 13. DISTRIBUTION OF FLOOR INSULATION BY HOME VINTAGE	15
Table 14. DISTRIBUTION OF FLOOR U-VALUE BY STATE	15
Table 15. DISTRIBUTION OF CEILING INSULATION	16
Table 16. DISTRIBUTION OF CEILING U-VALUE BY STATE	16
Table 17. DISTRIBUTION OF WINDOW U-VALUE BY STATE	17
Table 18. AVERAGE NORMALIZED HEAT-LOSS RATE BY VINTAGE	17
Table 19. AVERAGE HEAT-LOSS RATE BY AGE/STANDARD	18
Table 20. AVERAGE HEAT-LOSS RATE BY VINTAGE	18
Table 21. AVERAGE BLOWER DOOR AIR FLOW BY STATE	19
Table 22. AVERAGE BLOWER DOOR AIR TIGHTNESS BY STATE	19
Table 23. AVERAGE BLOWER DOOR AIR TIGHTNESS BY HOME VINTAGE	20
Table 24. AVERAGE INFILTRATION RATE BY STATE, ACH50 DIVIDED BY 20	20
Table 25. DISTRIBUTION OF PRIMARY HEATING SYSTEM	21
Table 26. DISTRIBUTION OF FUEL CHOICE FOR PRIMARY HEATING SYSTEM	22
Table 27. DISTRIBUTION OF SECONDARY HEATING SYSTEMS	23
Table 28. DISTRIBUTION OF FUEL CHOICE BY SECONDARY HEATING SYSTEM AND STATE	23
Table 29. DISTRIBUTION OF FUEL CHOICE, FORCED AIR FURNACES	24
Table 30. DISTRIBUTION OF FUEL CHOICE, COMBUSTION HEATING STOVES	24
Table 31. AVERAGE GAS FURNACE EFFICIENCY (AFUE) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE AND	-
STATE	25

	AVERAGE AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY EQUIPMENT	26
Table 33.	DISTRIBUTION OF AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY STATE	26
	PERCENTAGE OF HOMES WITH ANY MECHANICAL COOLING EQUIPMENT BY COOLING ZONE AND	27
Table 35.	DISTRIBUTION OF PRIMARY COOLING SYSTEMS IN COOLING ZONES BY TYPE	27
Table 36.	AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AC SYSTEMS BY VINTAGE	28
	AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AIR SOURCE HEAT PUMP SYSTEMS BY	
	AVERAGE NUMBER OF PORTABLE COOLING DEVICES PER HOME BY STATE	
Table 39.	CROSSOVER DUCT CONDITION IN MULTI-SECTION HOMES	30
Table 40.	AVERAGE TRUEFLOW RATE (CFM) BY STATE	30
Table 41.	AVERAGE NORMALIZED TRUEFLOW RATE (CFM) BY STATE	31
Table 42.	AVERAGE TRUEFLOW RATE (CFM) PER TON BY SYSTEM TYPE	31
Table 43.	AVERAGE NUMBER OF LAMPS PER HOME BY STATE	32
Table 44.	AVERAGE NUMBER OF FIXTURES PER HOME	32
Table 45.	DISTRIBUTION OF LAMPS BY EISA CATEGORY AND STATE	33
Table 46.	DISTRIBUTION OF LAMPS BY TYPE AND STATE	33
Table 47.	DISTRIBUTION OF LAMPS BY TYPE AND ROOM	34
Table 48.	AVERAGE NUMBER OF CFLS INSTALLED PER HOME BY STATE	35
Table 49.	AVERAGE NUMBER OF LEDS INSTALLED PER HOME BY STATE	35
Table 50.	AVERAGE NUMBER OF HALOGEN LAMPS INSTALLED PER HOME BY STATE	36
Table 51.	AVERAGE NUMBER OF INCANDESCENT LAMPS INSTALLED PER HOME BY STATE	36
Table 52.	AVERAGE NUMBER OF LINEAR FLUORESCENT LAMPS INSTALLED PER HOME BY STATE	37
Table 53.	AVERAGE NUMBER OF OTHER LAMPS INSTALLED PER HOME BY STATE	37
Table 54.	PERCENT OF HOMES WITH CFLS BY STATE	38
Table 55.	PERCENT OF HOMES WITH LEDS BY STATE	38
Table 56.	PERCENT OF HOMES WITH LEDS BY STATE AND OWNERSHIP TYPE	39
Table 57.	PERCENT OF HOMES WITH CONNECTED LIGHTING BY STATE	39
Table 58.	PERCENT OF HOMES WITH GROW LIGHTS BY STATE	40
Table 59.	AVERAGE NUMBER OF STORED COMPACT FLUORESCENT LAMPS BY STATE	40
Table 60.	PERCENTAGE OF ALL CFLS THAT ARE STORED	41
Table 61.	AVERAGE NUMBER OF STORED LED LAMPS BY STATE	41
Table 62.	PERCENTAGE OF ALL LEDS THAT ARE STORED	41
Table 63.	AVERAGE NUMBER OF STORAGE BULBS BY BULB TYPE AND STATE	42
Table 64.	DISTRIBUTION OF STORAGE BULBS BY BULB TYPE AND STATE	43

Table 65. AVERAGE HOUSEHOLD WATTS PER BULB BY STATE	43
Table 66. AVERAGE LIGHTING POWER DENSITY (LPD) BY ROOM TYPE	44
Table 67. AVERAGE EXTERIOR LIGHTING POWER (WATTS) BY STATE	45
Table 68. AVERAGE LIGHTING POWER DENSITY (LPD) BY STATE	45
Table 69. AVERAGE NUMBER OF APPLIANCES PER HOME BY TYPE	46
Table 70. AVERAGE MANUFACTURE DATE OF APPLIANCES BY TYPE	46
Table 71. PERCENT OF APPLIANCES BEYOND MEASURE LIFE BY STATE	47
Table 72. DISTRIBUTION OF REFRIGERATOR/FREEZERS BY VINTAGE	47
Table 73. DISTRIBUTION OF REFRIGERATORS BY TYPE	48
Table 74. AVERAGE REFRIGERATOR VOLUME BY TYPE	48
Table 75. DISTRIBUTION OF FREEZERS BY TYPE IN HOMES WITH FREEZERS	49
Table 76. AVERAGE FREEZER VOLUME BY TYPE	49
Table 77. DISTRIBUTION OF CLOTHES WASHERS BY VINTAGE	50
Table 78. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND STATE	50
Table 79. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND VINTAGE	51
Table 80. AVERAGE NUMBER OF CLOTHES WASHER LOADS PER WEEK BY STATE	51
Table 81. AVERAGE CLOTHES WASHER SIZE	52
Table 82. DISTRIBUTION OF CLOTHES DRYERS BY VINTAGE	52
Table 83. PERCENTAGE OF DRYER LOADS PER WASHER LOAD BY STATE	53
Table 84. DISTRIBUTION OF VENTED DRYERS BY STATE	53
Table 85. DISTRIBUTION OF DRYERS BY FUEL TYPE AND STATE	54
Table 86. DISTRIBUTION OF DISHWASHERS BY VINTAGE	54
Table 87. AVERAGE NUMBER OF DISHWASHER LOADS PER WEEK	55
Table 88. DISTRIBUTION OF COOK TOP FUEL BY TYPE	55
Table 89. DISTRIBUTION OF OVEN FUEL BY TYPE	55
Table 90. PERCENTAGE OF APPLIANCES THAT ARE WI-FI COMPATIBLE BY APPLIANCE TYPE AND STATE	56
Table 91. DISTRIBUTION OF WATER HEATER FUEL BY STATE	56
Table 92. DISTRIBUTION OF WATER HEATER LOCATION BY STATE	57
Table 93. DISTRIBUTION OF WATER HEATERS BY DETAILED TYPE	57
Table 94. DISTRIBUTION OF ALL WATER HEATER LOCATIONS BY SPACE HEATING FUEL TYPE	58
Table 95. DISTRIBUTION OF WATER HEATERS BY VINTAGE	58
Table 96. AVERAGE NUMBER OF SHOWERHEADS AND FAUCETS PER HOME BY STATE	59
Table 97. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE	59
Table 98. PERCENTAGE OF HOMES WITH SHOWERHEADS ABOVE 2.0 GPM BY STATE	60
Table 99. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE	60

Table 100.	DISTRIBUTION OF BATHROOM FAUCET FLOW RATE BY STATE	60
Table 101.	DISTRIBUTION OF KITCHEN FAUCET FLOW RATE BY STATE	61
Table 102.	AVERAGE NUMBER OF TELEVISIONS PER HOME BY STATE	61
Table 103.	AVERAGE TELEVISION POWER BY VINTAGE	62
Table 104.	DISTRIBUTION OF TELEVISION SCREENS BY TYPE AND VINTAGE	63
Table 105.	DISTRIBUTION OF TELEVISIONS BY ROOM TYPE	64
Table 106.	AVERAGE PRIMARY TELEVISION ON-TIME HOURS PER DAY PER HOME BY STATE	64
Table 107.	AVERAGE NUMBER OF SET-TOP BOXES PER HOME BY STATE	65
Table 108.	PERCENTAGE OF HOMES WITH SET-TOP BOXES	65
Table 109.	PERCENTAGE OF SET-TOP BOXES WITH DVR CAPABILITY BY STATE	66
Table 110.	PERCENTAGE OF HOMES WITH GAMING SYSTEMS	66
Table 111.	AVERAGE NUMBER OF GAMING SYSTEMS PER HOME	67
Table 112.	AVERAGE NUMBER OF COMPUTERS PER HOME BY STATE	68
Table 113.	PERCENTAGE OF HOMES WITH COMPUTERS BY STATE	68
Table 114.	AVERAGE NUMBER OF AUDIO SYSTEMS PER HOME BY STATE	69
Table 115.	AVERAGE NUMBER OF SUBWOOFERS PER HOME BY TYPE	69
Table 116.	AVERAGE NUMBER OF OCCUPANTS PER HOME BY STATE	70
Table 117.	AVERAGE NUMBER OF OCCUPANTS BY AGE CATEGORY BY STATE	70
Table 118.	DISTRIBUTION OF HOMES BY OWNERSHIP TYPE AND STATE	71
Table 119.	PERCENTAGE OF HOMES AS PRIMARY RESIDENCE BY STATE	71
	DISTRIBUTION OF HOMES WITH ELECTRIC FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND	72
	DISTRIBUTION OF HOMES WITH GAS FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE	
	AVERAGE HEATING THERMOSTAT SETPOINT BY STATE	
	PERCENTAGE OF HOMES REPORTING A HEATING SETBACK BY STATE	
	AVERAGE SIZE OF HEATING SETBACK BY STATE	
	AVERAGE COOLING THERMOSTAT SETPOINT BY STATE	
	PERCENTAGE OF HOMES REPORTING A COOLING THERMOSTAT SETUP BY STATE	
	DISTRIBUTION OF THERMOSTATS BY TYPE AND STATE	
	PERCENTAGE OF HOMES WITH AT LEAST ONE SMART POWER STIP BY STATE	
	DISTRIBUTION OF POWER STRIPS BY USE TYPE	
	PERCENTAGE OF HOUSEHOLDS REPORTING GAS SERVICE BY STATE	
	DISTRIBUTION OF WOOD USE AS HEATING FUEL BY STATE	
	DISTRIBUTION OF PELLET FUEL USE BY STATE	
Table 133.	DISTRIBUTION OF OIL FUEL USE BY STATE	78

Table 134. DISTRIBUTION OF PROPANE FUEL USE BY STATE	79
Table 135. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT SELF-FUNDED CONSERVATION BY STATE	79
Table 136. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT USE OF UTILITY CONSERVATION PROGRAN STATE	
Table 137. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF CONSERVATION TAX CREDITS	80
Table 138. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF BOTH UTILITY AND TAX CREDIT CONSERVATION PROGRAMS	
Table 139. PERCENT OF HOMES REPORTING HAVING COMPLETED AN ENERGY AUDIT IN THE LAST TWO YE	ARS 81
Table 140. PERCENTAGE OF HOUSEHOLDS WITH AN ELECTRIC VEHICLE	82
Table 141. PERCENTAGE OF HOUSEHOLDS WITH SOLAR PANELS	82
Table 142. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF SMART EQUIPMENT	83
Table 143. DISTRIBUTION OF HOUSEHOLD INCOME BY STATE	83
Table 144. AVERAGE ANNUAL KWH PER HOME BY STATE	84
Table 145. AVERAGE WEATHER NORMALIZED KWH PER HOME BY STATE	84
Table 146. AVERAGE ELECTRIC EUI PER HOME BY HEATING FUEL TYPE AND STATE	85
Table 147. AVERAGE ESTIMATED ANNUAL ELECTRIC SPACE HEAT PER HOME BY STATE	85
Table 148. AVERAGE ANNUAL GAS USE PER HOME BY STATE	86
Table 149. AVERAGE WEATHER NORMALIZED GAS USE PER HOME BY STATE	86
Table 150. AVERAGE GAS EUI PER HOME BY HEATING FUEL AND STATE	87
Table 151. AVERAGE ESTIMATED GAS SPACE HEAT BY STATE	87
Table 152. AVERAGE ANNUAL ELECTRICITY AND GAS USE PER HOME BY STATE	88
Table 153. AVERAGE ELECTRICITY AND GAS EUI BY STATE	88
Table 154. AVERAGE WEATHER-NORMALIZED ELECTRICITY AND GAS EUI BY STATE	89
Table 155. AVERAGE ANNUAL OTHER FUEL USE PER HOME BY STATE	89
Table 156. AVERAGE EUI, OTHER FUEL USE	90
Table 157. SUMMARY STATISTICS BY EUI QUARTILES	90

Table 1. DISTRIBUTION OF HOMES BY TYPE AND STATE (Compare to Table 7 in 2011 RBSA)

	Percentage of Homes										
Home Type	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Single Wide	31.1%	8.4%	41.5%▼	9.8%	14.3%	6.1%	20.5%▼	5.8%	21.7%▼	3.5%	108
Double Wide	63.6%	8.4%	51.8% ▲	9.9%	77.1% ▲	6.8%	73.0%	6.2%	71.3% ▲	3.8%	272
Triple Wide	4.2%	4.4%	2.8%	3.7%	3.2%	3.3%	5.2%	3.7%	4.3%	1.9%	18
Modular / Prefab	1.1%	6.6%	4.0%	5.7%	5.4%	3.9%	1.3%	2.6%	2.8%	1.4%	13
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411

BACK TO REPORT



Table 2. DISTRIBUTION OF HOMES BY VINTAGE AND STATE (Compare to Table 8 in 2011 RBSA)

	Percentage of Homes										
Vintage	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1951	1.1%	6.6%	0.9%	5.7%	0.0%	0.0%	0.5%	0.0%	0.4%▲	0.4%	3
1951-1960	0.0%	0.0%	1.8%	3.7%	0.0%	0.0%	0.8%	4.9%	0.5%	0.9%	3
1961-1970	4.2%	4.4%	10.7%	6.7%	6.0%	4.7%	9.6%	4.4%	7.8%	2.5%	31
1971-1980	24.0%	7.6%	27.5%	8.3%	22.8%	7.2%	29.2%	6.8%	26.3%	4.0%	111
1981-1990	14.5%	6.7%	10.3%	7.7%	18.3%	6.2%	19.3%▼	6.0%	17.6%▼	3.5%	66
1991-2000	45.7% ▲	8.2%	35.7% ▲	9.5%	38.5%	8.2%	27.2%	6.7%	33.9% ▲	4.2%	143
2001-2010	7.4%	5.0%	13.1%	7.8%	12.4%	5.7%	11.2%	4.8%	11.2%	2.9%	44
Post 2010	3.2%	4.2%	0.0%	0.0%	2.1%	4.3%	2.2%	3.0%	2.1%	1.5%	8
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	409

BACK TO REPORT



Table 3. DISTRIBUTION OF HOMES BY AGE, CONSTRUCTION STANDARD, AND STATE (Compare to Table 9 in 2011 RBSA)

	Percentage of Homes											
Age/Standard	ID		MT		OR		WA		Regio	1	2	
	%	EB	%	EB	%	EB	%	EB	%	EB	n	
Pre-1976, pre-HUD	15.8%	6.9%	31.5%	9.2%	22.4%	7.3%	22.9%	6.2%	22.5%	3.8%	93	
1976-1994, HUD	39.8%	8.9%	24.8%	8.9%	36.7%	8.1%	45.9%	7.5%	40.4%	4.5%	153	
1990-1994, SGC or Natural Choice	1.8%▼	11.2%	0.9%▼	5.9%	3.5%▼	3.8%	2.4%▼	3.3%	2.6%▼	1.7%	9	
Post-1994, HUD	38.3%▲	9.0%	39.7% ▲	9.9%	29.2% ▲	7.8%	26.3% ▲	6.5%	30.0% ▲	4.1%	124	
Post-1994, NEEM	1.1%	6.7%	3.1%	6.6%	4.1%	4.0%	1.7%	2.2%	2.5%	1.4%	10	
Post-1999, ENERGY STAR	3.2%	4.3%	0.0%	0.0%	4.1%	4.3%	0.8%▼	5.1%	2.1%▼	1.5%	8	
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	397	

Table 4. AVERAGE CONDITIONED FLOOR AREA BY STATE (Compare to Table 10 in 2011 RBSA)

State	Conditioned Floor Area (sq. ft.)							
	Mean	n						
ID	1,287.0	80.1	85					
MT	1,481.1	160.8	84					
OR	1,361.0	60.0	108					
WA	1,339.8	59.5	134					
Region	1,351.0 ▲	1,351.0 🛦 37.5 411						

Table 5. AVERAGE CONDITIONED FLOOR AREA BY VINTAGE AND STATE (Compare to Table 11 in 2011 RBSA)

				Co	nditioned Flo	or Area	(sq. ft.)				
Vintage	ID		MT	MT		OR		WA		Region	
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n
Pre 1951	1,966.3	NA	572.0	NA	0.0	0.0	1,072.0	NA	1,508.8	NA	3
1951-1960	0.0	0.0	988.9	122.9	0.0	0.0	750.0	NA	830.6▼	41.4	3
1961-1970	903.2	129.3	1,028.5	65.3	994.6▼	32.7	1,128.1 ▲	87.5	1,040.6▼	36.3	31
1971-1980	1,279.6▲	39.1	1,255.0 ▲	81.8	1,107.3	54.6	1,176.1	47.1	1,174.7 ▲	28.4	111
1981-1990	1,291.2	56.3	1,395.3 ▲	64.9	1,466.8 ▲	50.8	1,522.0 ▲	49.5	1,462.7 ▲	28.3	66
1991-2000	1,434.4▼	74.8	1,898.8▼	167.8	1,467.2	58.6	1,403.5	56.8	1,468.9	35.7	143
2001-2010	1,567.7	88.1	1,598.0	219.5	1,432.0 ▼	32.4	1,782.6	69.9	1,622.0 ▼	36.8	44
Post 2010	1,141.8	32.0	0.0	0.0	1,571.9	NA	1,365.3	164.2	1,401.8	24.3	8
All Vintages	1,365.1▲	22.1	1,308.9	44.8	1,331.2▲	17.9	1,383.2 ▲	22.6	1,357.0▲	12.5	409

Table 6. AVERAGE NUMBER OF BEDROOMS PER HOME BY STATE (Compare to Table 12 in 2011 RBSA)

State	Bedrooms per Home								
State	Mean	an EB							
ID	2.65▼	0.14	85						
MT	2.75	0.15	84						
OR	2.77	0.11	108						
WA	2.60	0.11	134						
Region	2.67	0.06	411						

Table 7. AVERAGE NUMBER OF BATHROOMS PER HOME BY STATE (Compare to Table 13 in 2011 RBSA)

State	Bathrooms per Home							
State	Mean	Mean EB						
ID	1.85	0.10	85					
MT	1.80	0.11	84					
OR	1.88	0.08	108					
WA	1.82	0.07	134					
Region	1.84	0.04	411					

Table 8. AVERAGE ROOM AREAS BY ROOM TYPE (Compare to Table 14 in 2011 RBSA)

_	Room Are	eas (sq. 1	ft.)
Room Type	Mean	EB	n
Bathroom	63.6	2.7	410
Bedroom	143.2	8.1	411
Closet	34.0▼	0.6	133
Dining Room	134.5 ▲	1.4	181
Family Room	241.2▼	1.5	127
Garage	584.2▼	4.8	35
Hall	47.4▼	0.9	336
Kitchen	173.1	1.2	393
Laundry	62.7▼	0.4	284
Living Room	269.8▲	2.8	360
Office	126.2▼	0.7	83
Other	209.5	7.3	45
All Room Types	150.3 ▲	1.6	411

# Table 9. BASELINE COMPONENT ASSUMPTIONS BY AGE/STANDARD (Compare to Table 15 in 2011 RBSA)

Component	Age and Construction Standard									
Component	Pre-1976, pre-HUD	1976–1994, HUD	1990–1994, SGC	Post-1994, HUD	Post-1994, NEEM	Post-1999, ENERGY STAR				
Ceiling	R7	R11	R38	R22	R38	R40				
Floor	R7	R11	R33	R22	R33	R33				
Wall	R7	R11	R21	R11	R21	R21				

Table 10. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE (Compare to Table 16 in 2011 RBSA)

					Wall Insulat	tion Leve	ls				
Vintage	R0–R	8	R9-R14		R15-R21		R22-R30		All Wal	ls	2
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1951	33.3%	0.0%	66.7%	0.0%	0.0%	0.0%	0.0%	0.0%	0.4%	0.4%	3
1951-1960	16.9%▼	13.3%	83.1%▲	6.1%	0.0%	0.0%	0.0%	0.0%	0.5%	0.9%	3
1961-1970	61.0%▼	4.4%	39.0% ▲	4.4%	0.0%	0.0%	0.0%	0.0%	7.8%	2.5%	31
1971-1980	33.7%	4.0%	63.4%	4.0%	2.7%	2.7%	0.2%	0.7%	27.5%	4.1%	111
1981-1990	16.4% ▲	3.3%	57.5%▼	3.7%	26.1%▲	3.0%	0.0%	0.0%	17.5%▼	3.5%	66
1991-2000	2.1%	1.7%	58.3%	4.2%	39.1%	4.1%	0.5%	1.7%	33.9%	4.2%	142
2001-2010	0.0%	0.0%	45.9%▲	4.0%	52.3%▲	4.1%	1.8%▲	3.2%	10.2% ▲	2.7%	40
Post 2010	0.0%	0.0%	25.9% ▲	3.4%	74.1%▲	2.3%	0.0%	0.0%	2.1%	1.5%	8
All Housing Vintages	17.6%	3.5%	57.1%	4.5%	24.9%	3.9%	0.4%	0.5%	100.0%	0.0%	404

Table 11. DISTRIBUTION OF WALL U-VALUE BY STATE (Compare to Table 17 in 2011 RBSA)

State	Wall U-Value							
State	Mean	n						
ID	0.094	0.010	85					
MT	0.107 ▲	0.010	84					
OR	0.097	0.009	108					
WA	0.103	0.008	134					
Region	0.100 ▲	0.005	411					

Table 12. DISTRIBUTION OF WALL INSULATION LEVELS BY STATE

	Distribution of Wall Insulation Levels												
Insulation Levels	ID		MT		OR		WA		Region		5		
	%	EB	%	EB	%	EB	%	EB	%	EB	n		
RO-R8	12.4%	6.4%	14.9%	5.6%	14.1%	6.0%	22.0%	6.2%	17.6%	3.5%	70		
R9-R14	51.2%	9.4%	68.9%	9.0%	60.4%	8.2%	54.0%	7.4%	56.9%	4.5%	235		
R15-R21	35.4%	9.1%	16.2%	8.3%	25.5%	7.4%	24.1%	6.4%	25.4%	4.0%	98		
R22-R30	1.1%	6.6%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.1%	0.9%	1		
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	404		

Table 13. DISTRIBUTION OF FLOOR INSULATION BY HOME VINTAGE (Compare to Table 18 in 2011 RBSA)

	Floor Insulation Levels												
Vintage	RO-R	8	R9-R1	R9-R14		R15-R21		R22-R30		40	All Floors		-
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1951	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.4%	0.4%	3
1951-1960	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.5%	0.9%	3
1961-1970	95.4% ▲	1.4%	4.6%	2.4%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	7.9%	2.5%	31
1971-1980	52.6%	4.2%	23.9%▼	3.7%	14.5% ▲	3.0%	2.7%▲	1.3%	6.4%	2.4%	26.5%	4.0%	111
1981-1990	19.5%	3.2%	73.3%	3.6%	1.5%▼	4.9%	3.5%	2.9%	2.3%	1.3%	17.7%▼	3.5%	66
1991-2000	8.0%	2.3%	17.5% ▼	3.5%	16.9% ▲	3.3%	44.5% ▲	4.3%	13.1%▼	3.0%	33.7%	4.2%	141
2001-2010	0.0%	0.0%	0.0%	0.0%	15.3%	1.8%	35.2%	3.7%	49.4%	3.8%	11.1%	2.9%	42
Post 2010	0.0%	0.0%	0.0%	0.0%	42.3%	5.6%	43.7%	4.8%	14.0%	3.4%	2.2%	1.5%	8
All Housing Vintages	29.0%	4.0%	25.1%▼	4.0%	11.6% ▲	3.0%	22.4%	3.7%	11.7%▼	3.0%	100.0%	0.0%	405

Table 14. DISTRIBUTION OF FLOOR U-VALUE BY STATE (Compare to Table 19 in 2011 RBSA)

State	Floor U-Value								
State	Mean	ean EB					Mean EB		
ID	0.096	0.014	85						
MT	0.130 ▲	0.026	84						
OR	0.092	0.012	108						
WA	0.112 ▲	0.015	134						
Region	0.105 ▲	0.009	411						

# Table 15. DISTRIBUTION OF CEILING INSULATION (Compare to Table 20 in 2011 RBSA)

	Ceiling Insulation Level												
Insulation Level	RO-R	RO-R8		R9-R14		R15-R21		R22-R30		40	All Ceilings		
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1951	68.1%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	31.9%	0.0%	0.4%	0.4%	3
1951-1960	83.1%▲	6.1%	16.9%	13.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.4%	0.8%	3
1961-1970	86.8% ▲	2.9%	10.2% ▲	3.1%	3.0%	7.5%	0.0%	0.0%	0.0%	0.0%	7.1%	2.4%	30
1971-1980	47.2% ▲	4.4%	39.2%▼	4.0%	5.8%	2.8%	4.3%	2.0%	3.5% ▲	2.1%	27.6%	4.2%	110
1981-1990	0.0%	0.0%	96.6%▲	1.6%	0.9%▼	2.2%	1.7%▼	2.3%	0.9%▼	1.2%	19.5%	3.7%	63
1991-2000	0.0%	0.0%	26.1%	4.0%	0.0%	0.0%	56.4% ▲	4.4%	17.5% ▼	3.4%	33.6%	4.2%	137
2001-2010	0.0%	0.0%	1.8%	3.3%	3.6%	1.8%	58.8%	4.2%	35.8%	4.3%	9.2%	2.8%	39
All Housing Vintages	18.8%	3.5%	40.4%	4.5%	2.5%	1.7%	28.1% ▲	4.0%	10.2%▼	2.9%	100.0%	0.0%	393



Table 16. DISTRIBUTION OF CEILING U-VALUE BY STATE (Compare to Table 21 in 2011 RBSA)

State	Ceiling U-Value						
State	Mean	EB	n				
ID	0.083	0.010	85				
MT	0.096	0.014	84				
OR	0.081	0.008	108				
WA	0.090	0.007	134				
Region	0.087	0.004	411				

Table 17. DISTRIBUTION OF WINDOW U-VALUE BY STATE (Compare to Table 23 in 2011 RBSA)

State	Window U-Value							
State	Mean	EB	n					
ID	0.58▼	0.02	85					
MT	0.64▼	0.04	84					
OR	0.60▼	0.03	108					
WA	0.65	0.03	134					
Region	0.62▼	0.02	411					

Table 18. AVERAGE NORMALIZED HEAT-LOSS RATE BY VINTAGE (Compare to Table 24 in 2011 RBSA)

Vintage		Heat-Loss Rate (UA/sq. ft.) per Home											
	ID		MT		OR		WA		Region		_		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n		
Pre 1981	0.53	0.04	0.56	0.04	0.51▲	0.03	0.52▲	0.03	0.52 ▲	0.02	148		
1981-1990	0.43 ▲	0.02	0.44	0.05	0.36	0.01	0.43 ▲	0.02	0.41 ▲	0.01	66		
1991-2000	0.27	0.01	0.27	0.01	0.28	0.01	0.27▼	0.01	0.27	0.01	143		
2001-2010	0.21▲	0.01	0.26▲	0.02	0.22▲	0.01	0.23 ▲	0.00	0.22 ▲	0.00	44		
Post 2010	0.21	0.02	0.00	0.00	0.24	NA	0.24	0.00	0.24	0.00	8		
All Vintages	0.34▼	0.01	0.38	0.01	0.33	0.01	0.35▼	0.01	0.35▼	0.00	409		

Table 19. AVERAGE HEAT-LOSS RATE BY AGE/STANDARD (Compare to Table 25 in 2011 RBSA)

	Heat-Loss Rate (UA/sq. ft.) per Home											
Age/Standard	ID		MT	MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n	
Pre-1976, pre-HUD	0.57	0.04	0.60▲	0.04	0.57▲	0.02	0.61▲	0.03	0.59▲	0.02	93	
1976-1994, HUD	0.41	0.03	0.44	0.05	0.36	0.01	0.42▲	0.02	0.40▲	0.01	153	
1990-1994, SGC or Natural Choice	0.42	NA	0.15	NA	0.26▲	0.01	0.23	NA	0.25 ▲	0.01	9	
Post-1994, HUD	0.25▼	0.01	0.27	0.02	0.24▼	0.01	0.24▼	0.01	0.24▼	0.00	124	
Post-1994, NEEM	0.15	NA	0.22	NA	0.17▼	0.00	0.17▼	0.01	0.18▼	0.00	10	
Post-1999, ENERGY STAR	0.18▲	0.00	0.00	0.00	0.22 ▲	0.01	0.17	NA	0.20▲	0.00	8	
All Age/Standards	0.33▼	0.01	0.35▼	0.01	0.32▼	0.00	0.37	0.01	0.34▼	0.00	397	

Table 20. AVERAGE HEAT-LOSS RATE BY VINTAGE (Compare to Table 26 in 2011 RBSA)

Vintage	Heat-Loss Rate (UA) per Home											
	ID		MT		OR		WA		Region			
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n	
Pre 1981	660.2▲	23.0	633.7▲	46.4	547.4 ▲	29.2	577.1▲	33.7	583.5▲	18.6	148	
1981-1990	525.7▲	23.7	580.7	45.8	525.2 ▲	18.3	631.1▲	34.5	578.9▲	17.0	66	
1991-2000	381.1▼	22.0	483.9▲	36.3	412.5	21.9	373.5	22.9	396.1	13.1	143	
2001-2010	323.2 ▲	21.7	385.4▲	31.5	310.6▼	8.3	400.1▲	16.9	359.6▲	8.3	44	
Post 2010	241.3	12.5	0.0	0.0	377.9	NA	329.1	37.7	330.4	5.8	8	
All Vintages	441.6▼	9.1	520.9▲	18.4	439.3 ▲	8.8	481.9▲	12.5	465.0▲	6.6	409	

Table 21. AVERAGE BLOWER DOOR AIR FLOW BY STATE (Compare to Table 27 in 2011 RBSA)

State	Blower Door Air Flow (CFM @ 50 Pa)						
	Mean	EB	n				
ID	1,462.2▼	124.2	60				
MT	1,700.3 ▼	130.6	61				
OR	1,365.4▼	116.3	66				
WA	1,580.7	129.8	77				
Region	1,506.2▼	72.8	264				

Table 22. AVERAGE BLOWER DOOR AIR TIGHTNESS BY STATE (Compare to Table 28 in 2011 RBSA)

State	Blower Door Air Tightness (ACH50)						
	Mean	EB	n				
ID	8.6▼	0.9	60				
MT	10.8	1.5	61				
OR	7.2▼	0.6	66				
WA	9.8▼	1.0	77				
Region	8.9▼	0.5	264				

Table 23. AVERAGE BLOWER DOOR AIR TIGHTNESS BY HOME VINTAGE (Compare to Table 29 in 2011 RBSA)

Vintage	Blower Door Air Tightness (ACH50)						
	Mean	EB	n				
Pre 1951	6.1	0.1	2				
1951-1960	14.3	0.0	1				
1961-1970	16.2▼	0.4	17				
1971-1980	11.7▼	0.2	61				
1981-1990	8.9▼	0.1	45				
1991-2000	7.0▼	0.1	104				
2001-2010	5.3	0.1	29				
Post 2010	5.0	0.1	5				
All Vintages	8.9▼	0.1	264				



Table 24. AVERAGE INFILTRATION RATE BY STATE, ACH50 DIVIDED BY 20 (Compare to Table 30 in 2011 RBSA)

State	Infiltration Rate (ACH50/20)						
State	Mean	EB	n				
ID	0.43▼	0.05	60				
MT	0.54	0.07	61				
OR	0.36▼	0.03	66				
WA	0.49▼	0.05	77				
Region	0.44▼	0.03	264				

Table 25. DISTRIBUTION OF PRIMARY HEATING SYSTEM (Compare to Table 32 in 2011 RBSA)

Heating System Type	Primary He	ating Syst	ems
Heating System Type	%	EB	n
Air Source Heat Pump	24.0% ▲	3.8%	87
Boiler	0.2%	0.3%	2
Electric Baseboard and Wall Heaters	1.0%	1.0%	4
Furnace	57.4%	4.4%	254
Mini-split HP	2.3%	1.3%	8
Other Zonal Heat	0.5%	0.9%	2
Plug-In Heaters	2.8%	1.6%	10
Stove/Fireplace	11.9% ▼	3.0%	45
Total	100.0%	0.0%	411



Table 26. DISTRIBUTION OF FUEL CHOICE FOR PRIMARY HEATING SYSTEM (Compare to Table 33 in 2011 RBSA)

		Fuel Choice (Primary System)											
Fuel Type	ID		MT		OR		WA		Region				
	%	EB	%	EB	%	EB	%	EB	%	EB	n		
Electric	58.9%	9.2%	12.8%	7.4%	76.9%	6.8%	81.7%	5.6%	71.5%	3.6%	257		
Gas	24.0%	8.0%	51.7%	8.4%	10.8%	5.7%	7.3%	4.3%	14.3%	2.8%	91		
Oil/Kerosene	2.9%	6.0%	0.0%	0.0%	0.8%	5.0%	0.0%	0.0%	0.7%	0.9%	3		
Propane	5.1%	5.4%	15.8%	8.0%	0.0%	0.0%	2.1%	2.8%	2.9%	1.3%	19		
Wood	6.9%▼	6.1%	15.5%	8.4%	9.5%	5.6%	7.2%▼	4.2%	8.6%▼	2.6%	32		
Pellets	2.1%	4.4%	4.2%	8.3%	2.1%	4.3%	1.7%	3.4%	2.1%	1.4%	8		
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	410		



Table 27. DISTRIBUTION OF SECONDARY HEATING SYSTEMS (Compare to Table 34 in 2011 RBSA)

Heating System Type	Secondary H	eating Sys	stems
Heating System Type	%	EB	n
Air Source Heat Pump	5.2%	3.1%	12
Electric Baseboard and Wall Heaters	1.2%	1.6%	4
Furnace	22.1%▼	5.3%	57
Mini-split HP	1.1%	1.3%	4
Other Zonal Heat	36.4%	6.0%	91
Packaged AC	0.6%	1.4%	2
Packaged HP	0.5%	0.8%	3
Stove/Fireplace	32.8% ▲	5.7%	94
Total	100.0%	0.0%	210

Table 28. DISTRIBUTION OF FUEL CHOICE BY SECONDARY HEATING SYSTEM AND STATE (Compare to Table 35 in 2011 RBSA)

	Fuel Choice (Secondary Systems)											
Fuel Type	ID	1	M	Γ	OR		WA		Region		,	
	%	EB	%	EB	%	EB	%	EB	%	EB	n	
Electric	67.6%	13.9%	41.6%	15.3%	71.0%	9.9%	66.2%	9.5%	65.9%	5.8%	144	
Gas	6.5%	9.5%	6.6%	9.2%	7.0%	7.5%	2.2%	5.8%	4.7%	2.8%	12	
Oil/Kerosene	0.0%	0.0%	2.5%	19.5%	0.0%	0.0%	0.0%	0.0%	0.2%	1.6%	1	
Propane	2.2%	15.1%	22.1%	13.5%	3.7%	8.0%	7.4%	6.6%	6.7%	3.4%	16	
Wood (cord)	18.9%	12.7%	24.9%	13.0%	15.8%	8.0%	19.0%	7.7%	18.5%	4.6%	56	
Wood (pellets)	4.8%	11.4%	2.2%	14.8%	2.5%	3.6%	5.2%	5.7%	4.1% ▲	2.7%	11	
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	209	

Table 29. DISTRIBUTION OF FUEL CHOICE, FORCED AIR FURNACES (Compare to Table 36 in 2011 RBSA)

Fuel Type	Fuel Choice (Forced Air Furnaces)					
Fuel Type	%	EB	n			
Electric	75.3%	4.0%	195			
Gas	19.5%	3.8%	92			
Oil/Kerosene	0.6%	1.2%	2			
Propane	4.6%	1.8%	23			
Total	100.0%	0.0%	312			

Table 30. DISTRIBUTION OF FUEL CHOICE, COMBUSTION HEATING STOVES (Compare to Table 37 in 2011 RBSA)

Fuel	Fuel Choice (Heating Stove)				
Type	% EB n				
Gas	2.6%▼	5.6%	2		
Pellets	17.7%	8.2%	12		
Propane	6.3%	7.2%	4		
Wood	73.4%	7.6%	55		
Total	100.0%	0.0%	72		

Table 31. AVERAGE GAS FURNACE EFFICIENCY (AFUE) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE AND STATE (Compare to Table 38 in 2011 RBSA)

	Efficiency (AFUE)										
Vintage	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1990	80.0%	NA	80.0%	NA	80.0%	0.0%	0.0%	0.0%	80.0% ▲	0.0%	4
1990-1999	81.7%▼	0.1%	80.8%	0.1%	80.6%	0.4%	81.4%	0.2%	81.1% ▲	0.0%	40
2000-2005	80.0%	NA	82.0%	0.2%	86.8%	7.2%	0.0%	0.0%	81.9%	0.4%	12
2006-2014	86.5% ▲	0.3%	81.8% ▲	0.0%	80.4%	NA	96.7%	NA	84.2% ▲	0.1%	20
Post 2014	96.3%	0.3%	81.0%	0.0%	0.0%	0.0%	87.6%	24.9%	89.3%	4.4%	6
Vintage Unknown	86.0%	1.5%	80.4%	0.0%	80.0%	NA	83.0%	1.1%	82.7%	0.5%	23
All Vintages	84.9% ▲	0.3%	81.1%▲	0.0%	80.6% ▲	0.1%	84.8% ▲	2.2%	83.0% ▲	0.5%	105



Table 32. AVERAGE AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE (Compare to Table 39 in 2011 RBSA)

\/into ac	Efficiency (HSPF)						
Vintage	Mean	EB	n				
1990-1999	7.7 ▲	0.1	7				
2000-2005	7.5 ▲	0.1	16				
2006-2014	8.2▼	0.1	29				
Post 2014	8.5	0.1	16				
All Vintages	8.1▲	0.0	68				

Table 33. DISTRIBUTION OF AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY STATE (Compare to Table 40 in 2011 RBSA)

		Percentage of Homes							
HSPF	ID		OR		WA		Regio		
	%	EB	%	EB	%	EB	%	EB	n
6.8-7.6	12.7%▼	15.7%	34.0%▼	16.0%	5.3%	0.0%	16.3%▼	5.7%	14
7.7-8.2	42.2%	16.1%	39.4%	13.8%	77.5% ▲	12.2%	59.0% ▲	7.8%	36
8.3-8.9	36.7% ▲	14.2%	11.7%	10.7%	4.8%	24.8%	11.9% ▲	5.2%	9
9.0+	8.4%	16.4%	14.9%	13.8%	12.4%	13.4%	12.7%	6.9%	9
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	68

Table 34. PERCENTAGE OF HOMES WITH ANY MECHANICAL COOLING EQUIPMENT BY COOLING ZONE AND STATE (Compare to Table 41 in 2011 RBSA)

		Cooling Equipment per Home (All Systems)										
Cooling Zone	ID		MT		OR		WA		Region		2	
	%	EB	%	EB	%	EB	%	EB	%	EB	n	
1	80.0% ▲	7.8%	74.6% ▲	7.7%	61.9%	8.0%	60.3%▲	6.4%	64.7% ▲	4.1%	257	
2	86.8% ▲	5.8%	70.7% ▲	9.4%	65.4%	7.2%	70.2%	11.8%	71.3%	4.4%	88	
3	98.1% ▲	2.4%	0.0%	0.0%	77.5% ▼	10.7%	100.0%	0.0%	90.6%	3.8%	66	
All Cooling Zones	90.8% ▲	5.3%	75.3% ▲	8.0%	63.3%	7.8%	61.7% ▲	6.6%	67.2% ▲	4.0%	411	



Table 35. DISTRIBUTION OF PRIMARY COOLING SYSTEMS IN COOLING ZONES BY TYPE (Compare to Table 42 in 2011 RBSA)

		Percentage of Primary Cooling Systems								
Cooling System Type	Cooling Zo	ne 1	Cooling Zo	Cooling Zone 2		Cooling Zone 3		All Cooling Zones		
	%	EB	%	EB	%	EB	%	EB	n	
Packaged AC	59.5%	3.0%	35.3%	3.1%	5.2%	1.3%	28.9%	5.1%	86	
Packaged HP	97.4%	0.0%	2.6%	0.0%	0.0%	0.0%	0.6%▼	0.6%	3	
Central AC	44.4% ▲	4.4%	21.7%▼	3.9%	33.9%▼	5.6%	21.0%	3.9%	69	
Air Source Heat Pump	61.7%	3.4%	14.9%▼	4.1%	23.4%▲	3.5%	44.6% ▲	5.6%	98	
Mini-split HP	70.2%	3.4%	29.8%	4.2%	0.0%	0.0%	4.4%	2.6%	10	
Mini-split AC	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.5%	3.2%	1	
All Types	61.8% ▲	3.4%	19.9%▼	3.8%	18.3%	3.3%	100.0%	0.0%	267	



Table 36. AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AC SYSTEMS BY VINTAGE (Compare to Table 43 in 2011 RBSA)

Vintage	Efficien	cy (SEER)	
Vintage	Mean	EB	n
Pre 1990	NA	NA	0
1990-1999	10.0	0.0	3
2000-2005	11.0▲	0.3	7
2006-2014	13.5	0.4	9
Post 2014	13.1	0.1	2
Vintage Unknown	13.0	0.0	1
All Vintages	12.3 ▲	0.1	22



### Table 37. AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AIR SOURCE HEAT PUMP SYSTEMS BY VINTAGE

(Compare to Table 44 in 2011 RBSA)

Vintage	Efficiency (SEER)					
Vintage	Mean	EB	n			
Pre 1990	NA	NA	0			
1990-1999	11.5▲	0.1	11			
2000-2005	11.7▲	0.2	18			
2006-2014	13.6	0.1	34			
Post 2014	14.5	0.1	18			
Vintage Unknown	14.0	0.0	1			
All Vintages	13.0▲	0.1	82			



State	Number of Portable Cooling Devices per Home				
	Mean	EB	n		
ID	0.12	0.06	85		
MT	0.14	0.07	84		
OR	0.30▲	0.08	108		
WA	0.30▲	0.07	134		
Region	0.26▲	0.04	411		

# Table 39. CROSSOVER DUCT CONDITION IN MULTI-SECTION HOMES (Compare to Table 46 in 2011 RBSA)

	Crossover Duct Condition									
Unit Type	Connecte	Partially C	Connected	Discon	_					
	%	EB	%	EB	%	EB	n			
Double Wide	98.2%▲	2.1%	0.0%	0.0%	1.8%	3.6%	57			
Triple Wide	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	5			
Modular / Prefab	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	3			
All Types	98.4% ▲	2.0%	0.0%	0.0%	1.6%	3.4%	65			

Table 40. AVERAGE TRUEFLOW RATE (CFM) BY STATE

State	Average TrueFlow CFM						
State	Mean	EB	n				
ID	532.3	125.0	26				
MT	888.5	NA	1				
OR	682.0	111.4	30				
WA	877.5	69.2	26				
Region	765.2	51.0	83				

Table 41. AVERAGE NORMALIZED TRUEFLOW RATE (CFM) BY STATE

State	Average TrueFlow CFM Normalized by Home Area (sq. ft.)						
	Mean EB n						
ID	0.46	0.11	26				
MT	0.50	NA	1				
OR	0.50	0.08	30				
WA	0.67 0.12 26						
Region	0.57 0.06 83						

Table 42. AVERAGE TRUEFLOW RATE (CFM) PER TON BY SYSTEM TYPE

System Type	Average CFM per Ton					
System Type	Mean	EB	n			
Air Source Heat Pump	344.1	42.6	33			
Furnace	188.6	39.2	46			
All Systems	250.5	28.4	73			

Table 43. AVERAGE NUMBER OF LAMPS PER HOME BY STATE (Compare to Table 52 in 2011 RBSA)

	Lamps per Home					
State	Mean	EB	n			
ID	34.8	2.8	85			
MT	40.9▲	4.4	84			
OR	41.5	3.3	108			
WA	37.0	2.4	134			
Region	38.5▲	1.6	411			

Table 44. AVERAGE NUMBER OF FIXTURES PER HOME (Compare to Table 53 in 2011 RBSA)

Ctata	Fixtures	per Hor	me
State	Mean	EB	n
ID	22.2	1.6	85
MT	26.2▲	2.5	84
OR	26.7▲	1.7	108
WA	24.0▲	1.6	134
Region	24.8▲	0.9	411

## Table 45. DISTRIBUTION OF LAMPS BY EISA CATEGORY AND STATE (Compare to Table 54 in 2011 RBSA)

		Percentage of Lamps									
EISA Category	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	N
Exempt	22.7%	7.8%	27.7% ▲	8.8%	32.6% ▲	7.7%	30.5% ▲	6.8%	29.9% ▲	4.2%	376
Noncompliant	26.6%▼	8.1%	27.0%▼	8.7%	20.7%▼	6.8%	19.4%▼	5.8%	21.4%▼	3.7%	358
Compliant	50.7% ▲	9.2%	45.3%	9.8%	46.7%	8.3%	50.1%	7.3%	48.7% ▲	4.5%	409
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411

Table 46. DISTRIBUTION OF LAMPS BY TYPE AND STATE (Compare to Table 55 in 2011 RBSA)

		Percent of Lamps									
Lamp Type	ID		MT		OR		WA		Regio	n	5
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Compact Fluorescent	31.2%	8.6%	28.9%	8.4%	24.1%	7.1%	27.6%	6.5%	27.1%	4.0%	388
Halogen	6.5%	4.7%	5.9%	4.8%	6.0%	3.9%	6.9%	3.7%	6.5%▲	2.2%	245
Incandescent	42.5%▼	9.1%	46.0%▼	9.8%	39.0%▼	8.1%	36.8%▼	7.0%	39.0%▼	4.4%	381
Incandescent / Halogen	0.5%	1.8%	0.0%	0.0%	0.6%	1.5%	0.0%	0.5%	0.3%	0.5%	20
Light Emitting Diode	12.0%▲	6.1%	6.2%	5.0%	21.1% ▲	6.7%	19.8% ▲	5.9%	18.1% ▲	3.6%	254
Linear Fluorescent	5.7%	4.4%	11.5%	6.9%	7.1%	4.3%	7.0%	3.9%	7.2%	2.4%	201
Other	1.5%	2.4%	1.3%	2.4%	2.0%	2.3%	1.9%	2.0%	1.8%	1.2%	126
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411

Table 47. DISTRIBUTION OF LAMPS BY TYPE AND ROOM (Compare to Table 56 in 2011 RBSA)

							Perce	nt of Lam	ıps						
Lamp Type	Comp Fluores		Halo	gen	Incandes	scent	Incando Halo	•	LED		Linea Fluores		Oth	ner	n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Bathroom	26.2%	4.0%	6.3%▲	2.2%	47.5%▼	4.4%	0.5%	0.8%	14.3% ▲	3.2%	2.3%	1.5%	2.9%▼	1.6%	407
Bedroom	31.3%	4.1%	5.9% ▲	2.2%	42.7%▼	4.4%	0.2%	0.6%	16.4% ▲	3.4%	1.5%	1.1%	2.1%	1.4%	408
Closet	33.8% ▲	4.1%	4.3%▲	2.0%	47.4%▼	4.0%	0.0%	0.0%	10.6% ▲	3.0%	3.4%▼	2.4%	0.5%	0.8%	117
Dining Room	22.0%	3.4%	4.9%	2.0%	57.6%▼	4.4%	0.0%	0.0%	12.5% ▲	3.2%	1.3%▼	1.3%	1.6%▲	1.2%	177
Family Room	24.6%▼	3.9%	6.1%	2.2%	38.0%▼	4.0%	0.5%	1.1%	27.7% ▲	3.9%	1.0%	0.9%	2.2%▼	1.2%	118
Garage	10.2%	2.7%	2.4%	1.9%	12.3%▼	2.9%	1.0%	1.5%	13.6% ▲	3.5%	59.7%	4.0%	0.7%▼	0.7%	64
Hall	38.2%	4.3%	6.0%▲	2.2%	36.6%▼	4.2%	0.0%	0.0%	13.9% ▲	3.1%	3.3%	1.6%	2.0%▼	1.4%	307
Kitchen	21.3%▼	3.5%	6.9%	2.3%	25.4%▼	3.9%	0.1%	0.6%	18.7% ▲	3.5%	25.7%	4.0%	1.9%▼	1.4%	392
Laundry	32.3%	4.1%	2.3%	1.1%	32.6%▼	4.2%	0.0%	0.0%	17.7% ▲	3.3%	13.6%	3.1%	1.4%	1.1%	278
Living Room	32.9%	4.3%	6.9%▲	2.3%	37.2%▼	4.2%	0.4%	0.7%	17.6% ▲	3.5%	2.6%	1.4%	2.4%▼	1.4%	355
Office	25.8%▼	3.4%	7.9% ▲	2.1%	36.0%▼	3.7%	0.0%	0.0%	22.3% ▲	3.3%	7.6%▼	2.6%	0.4%	2.1%	80
Other	20.7%	3.7%	5.6%	2.2%	28.8%▼	2.8%	0.0%	0.0%	8.8% ▲	2.5%	33.6%▼	4.3%	2.6%▼	6.4%	54
Outside	23.8%	3.9%	9.9%	2.6%	35.3%▼	4.1%	1.0%	1.1%	25.5% ▲	3.8%	2.1%▼	1.5%	2.3%▼	1.4%	333
All Room Types	27.6%	4.0%	6.2%▲	2.1%	39.4%▼	4.4%	0.3%	0.6%	16.2% ▲	3.4%	8.3%	2.5%	2.0%▼	1.2%	411



Table 48. AVERAGE NUMBER OF CFLS INSTALLED PER HOME BY STATE (Compare to Table 57 in 2011 RBSA)

Ctata	Numbe	ps	
State	Mean	EB	n
ID	11.0	2.1	85
MT	11.0▲	1.8	84
OR	9.7	1.2	108
WA	9.6	1.0	134
Region	10.0	0.7	411

Table 49. AVERAGE NUMBER OF LEDS INSTALLED PER HOME BY STATE

WEIGHTED	Average Number of Installed LEDs per Home					
	Mean	EB	n			
ID	3.5	1.0	85			
MT	2.6	1.3	84			
OR	8.2	2.0	108			
WA	7.0	1.7	134			
Region	6.6 1.0 411					

Table 50. AVERAGE NUMBER OF HALOGEN LAMPS INSTALLED PER HOME BY STATE (Compare to Table 58 in 2011 RBSA)

	Number of Lamps					
State	Mean	EB	n			
ID	2.3 ▲	0.8	85			
MT	2.2 ▲	0.6	84			
OR	2.5 ▲	0.6	108			
WA	2.6 ▲	0.6	134			
Region	2.5 ▲	0.4	411			

Table 51. AVERAGE NUMBER OF INCANDESCENT LAMPS INSTALLED PER HOME BY STATE (Compare to Table 59 in 2011 RBSA)

Ctata	Number of Lamps					
State	Mean	EB	n			
ID	14.3▼	2.1	85			
MT	17.6	2.9	84			
OR	15.4▼	2.1	108			
WA	13.6▼	1.7	134			
Region	14.6▼	1.1	411			

Table 52. AVERAGE NUMBER OF LINEAR FLUORESCENT LAMPS INSTALLED PER HOME BY STATE (Compare to Table 60 in 2011 RBSA)

Ctata	Number of Lamps				
State	Mean	EB	n		
ID	2.2	0.7	85		
MT	5.6	2.8	84		
OR	3.5	0.8	108		
WA	2.9	0.8	134		
Region	3.2	0.5	411		

Table 53. AVERAGE NUMBER OF OTHER LAMPS INSTALLED PER HOME BY STATE (Compare to Table 61 in 2011 RBSA)

Ctata	Number of Lamps				
State	Mean	EB	n		
ID	0.6▲	0.3	85		
MT	0.7▲	0.3	84		
OR	1.0 ▲	0.3	108		
WA	0.8 🛦	0.2	134		
Region	0.8 🛦	0.2	411		

**Table 54. PERCENT OF HOMES WITH CFLS BY STATE** 

State	Homes with CFLs				
State	%	EB	n		
ID	95.0%	4.2%	85		
MT	96.0%	4.0%	84		
OR	93.3%	4.2%	108		
WA	92.5%	4.0%	134		
Region	93.4%	2.4%	411		



**Table 55. PERCENT OF HOMES WITH LEDS BY STATE** 

State	Homes with LEDs				
State	%	EB	n		
ID	53.0%	9.3%	85		
MT	43.9%	9.8%	84		
OR	74.9%	7.1%	108		
WA	70.6%	6.5%	134		
Region	67.4%	4.0%	411		



Table 56. PERCENT OF HOMES WITH LEDS BY STATE AND OWNERSHIP TYPE

	Percent of Homes with LEDs										
Ownership Type	10	)	M	Ī	OR		WA	4	Regi	on	2
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Own / buying	51.5%	9.3%	49.8%	9.8%	76.4%	6.8%	72.3%	6.5%	68.8%	4.0%	370
Rent	62.5%	10.7%	13.3%	5.5%	43.0%	0.0%	80.1%	5.4%	51.4%	2.3%	34
Occupy without rent	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	0.0%	0.0%	8.3%	0.0%	3
All Types	52.5%	9.3%	43.9%	9.8%	74.9%	7.1%	71.6%	6.5%	67.8%	4.0%	407



Table 57. PERCENT OF HOMES WITH CONNECTED LIGHTING BY STATE

State	Homes with Connected Lighting			
State	%	EB	n	
ID	1.1%	1.7%	85	
MT	0.0%	0.0%	84	
OR	1.3%	2.1%	108	
WA	2.2%	2.1%	134	
Region	1.6%	1.2%	411	

Table 58. PERCENT OF HOMES WITH GROW LIGHTS BY STATE

State	Percent of Homes with Grow Lights			
State	%	EB	n	
ID	0.0%	0.0%	85	
MT	0.9%	1.5%	84	
OR	1.3%	2.1%	108	
WA	0.0%	0.0%	134	
Region	0.5%	0.7%	411	

Table 59. AVERAGE NUMBER OF STORED COMPACT FLUORESCENT LAMPS BY STATE (Compare to Table 62 in 2011 RBSA)

Ctata	Stored Compact Fluorescent Lamps			
State	Mean	EB	n	
ID	1.6	0.6	85	
MT	2.4	0.9	84	
OR	3.1	0.9	108	
WA	2.5	0.7	134	
Region	2.5	0.4	411	

Table 60. PERCENTAGE OF ALL CFLS THAT ARE STORED (Compare to Table 63 in 2011 RBSA)

State	Compact Fluorescent Lamps			
State	% EB		n	
ID	11.4%	6.2%	81	
MT	17.4%	7.5%	81	
OR	16.4%▼	6.2%	101	
WA	18.9%	5.9%	125	
Total	17.0%	3.5%	388	

Table 61. AVERAGE NUMBER OF STORED LED LAMPS BY STATE

Ctata	Average Number of Stored LEDs			
State	Mean	EB	n	
ID	0.42	0.28	85	
MT	0.84	0.83	84	
OR	0.26	0.15	108	
WA	0.65	0.30	134	
Region	0.51	0.17	411	

Table 62. PERCENTAGE OF ALL LEDS THAT ARE STORED

State	Percent of LEDs in Storage				
State	%	EB	n		
ID	25.4%	11.0%	45		
MT	14.3%	10.8%	36		
OR	20.7%	7.8%	80		
WA	17.9%	6.6%	93		
Region	19.5%	4.3%	254		

Table 63. AVERAGE NUMBER OF STORAGE BULBS BY BULB TYPE AND STATE

	Average Number of Storage Bulbs										
Lamp Category	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n
Compact Fluorescent	1.5	0.5	2.4	8.0	1.9	0.5	2.4	0.7	2.1	0.4	411
Halogen	0.3	0.2	0.7	0.5	0.4	0.2	0.6	0.2	0.5	0.1	411
Incandescent	2.3	0.7	4.6	1.4	3.4	1.0	2.8	0.6	3.1	0.4	411
Incandescent / Halogen	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	411
Light Emitting Diode	1.3	0.6	0.5	0.3	2.1	0.6	1.5	0.6	1.6	0.3	411
Linear Fluorescent	0.0	0.1	0.4	0.7	0.0	0.0	0.1	0.2	0.1	0.1	411
All Categories	5.4	1.1	8.5	1.8	7.9	1.3	7.5	1.1	7.4	0.7	411

Table 64. DISTRIBUTION OF STORAGE BULBS BY BULB TYPE AND STATE

	Distribution of Storage Bulbs										
Lamp Category	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Compact Fluorescent	26.3%	8.2%	28.1%	8.3%	23.8%	6.9%	31.8%	6.6%	28.2%	4.0%	411
Halogen	5.6%	4.3%	7.4%	5.7%	5.6%	3.8%	7.2%	3.6%	6.5%	2.2%	411
Incandescent	45.3%	8.2%	53.8%	9.8%	43.3%	8.1%	39.6%	7.0%	42.7%	4.4%	411
Incandescent / Halogen	0.4%	1.1%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.1%	0.1%	411
Light Emitting Diode	21.8%	7.7%	5.6%	4.9%	26.8%	7.3%	19.1%	5.6%	20.8%	3.6%	411
Linear Fluorescent	0.5%	1.7%	4.9%	5.0%	0.0%	0.0%	2.2%	2.3%	1.5%	1.2%	411
Other	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	411
Unknown	0.0%	0.0%	0.2%	0.8%	0.5%	1.3%	0.0%	0.0%	0.2%	0.4%	411
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411



Table 65. AVERAGE HOUSEHOLD WATTS PER BULB BY STATE

Ctata	Average Lamp Wattage per Home					
State	Mean	EB	n			
ID	37.4	2.9	85			
MT	39.4	2.9	84			
OR	36.5	2.4	108			
WA	33.5	2.0	134			
Region	35.4	1.3	411			

Table 66. AVERAGE LIGHTING POWER DENSITY (LPD) BY ROOM TYPE (Compare to Table 64 in 2011 RBSA)

	D-	I DD					
	Room LPD						
Room Type	(W/sq. ft.)						
	Mean	EB	n				
Bathroom	2.03▼	0.16	397				
Bedroom	0.60▼	0.04	357				
Closet	1.56▼	0.15	114				
Dining Room	1.18▼	0.09	170				
Family Room	0.58▼	0.05	105				
Garage	0.59▼	0.03	34				
Hall	1.43	0.13	297				
Kitchen	0.98▼	0.07	372				
Laundry	0.92▼	0.08	260				
Living Room	0.50▼	0.04	271				
Office	0.87	0.05	75				
Other	0.83▼	0.08	35				
All Room Types	1.02 ▼	0.03	411				

Table 67. AVERAGE EXTERIOR LIGHTING POWER (WATTS) BY STATE (Compare to Table 65 in 2011 RBSA)

State	Exterior Lighting Power (Watts)					
	Mean	EB	n			
ID	151.5	37.4	62			
MT	185.8	49.9	65			
OR	138.6▼	25.4	87			
WA	109.1▼	20.1	103			
Region	130.4▼	13.8	317			

Table 68. AVERAGE LIGHTING POWER DENSITY (LPD) BY STATE (Compare to Table 66 in 2011 RBSA)

State	Home LPD (W/sq. ft.)				
	Mean	EB	n		
ID	0.91▼	0.09	85		
MT	1.00	0.19	84		
OR	0.93▼	0.08	108		
WA	0.80▼	0.06	134		
Region	0.87▼	0.04	411		

Table 69. AVERAGE NUMBER OF APPLIANCES PER HOME BY TYPE (Compare to Table 68 in 2011 RBSA)

Appliance	Number of Appliances per Home						
Appliance	Mean	EB	n				
Dishwasher	0.79	0.04	411				
Clothes Dryer	0.94	0.02	411				
Freezer	0.43	0.05	411				
Refrigerator	1.17	0.04	411				
Clothes Washer	0.96▼	0.02	411				
Water Heater	0.98	0.02	411				



Table 70. AVERAGE MANUFACTURE DATE OF APPLIANCES BY TYPE

Tuno	Average Manufacture Date					
Type	Mean	EB	n			
Dishwasher	2007	0.7	285			
Clothes Dryer	2006	0.7	169			
Freezer	2007	0.5	66			
Refrigerator	2006	0.7	273			
Clothes Washer	2008	0.7	308			



Table 71. PERCENT OF APPLIANCES BEYOND MEASURE LIFE BY STATE

Type	Percent	Percent of Appliances				
Туре	%	EB	n			
Dishwasher	33.7%	4.3%	285			
Clothes Dryer	33.0%	3.8%	169			
Freezer	16.4%	1.5%	66			
Refrigerator	25.2%	3.6%	273			
Clothes Washer	21.2%	3.5%	308			
Water Heater	31.2%	4.1%	265			



Table 72. DISTRIBUTION OF REFRIGERATOR/FREEZERS BY VINTAGE (Compare to Table 69 in 2011 RBSA)

Vintogo	Refri	gerators	
Vintage	%	EB	n
Pre 1980	0.0%	0.0%	0
1980-1989	1.7%	1.4%	7
1990-1994	7.8%	3.1%	23
1995-1999	12.9%▼	3.7%	39
2000-2004	11.1%▼	2.8%	49
2005-2009	22.5%▼	4.2%	82
2010-2014	29.2%▲	4.6%	97
Post 2014	14.8%	3.7%	53
Total	100.0%	0.0%	287

Table 73. DISTRIBUTION OF REFRIGERATORS BY TYPE (Compare to Table 70 in 2011 RBSA)

Defrigerator Tune	Refrigerators					
Refrigerator Type	%	EB	n			
Full Size Refrigerator Only	0.5%▼	0.8%	3			
Mini Refrigerator	6.3%▲	2.3%	28			
Refrigerator with Bottom Freezer	12.1%	3.1%	53			
Refrigerator with Side-by-Side Freezer	24.3%	3.9%	106			
Refrigerator with Top Freezer	50.1%▼	4.6%	232			
Side-by-Side Refrigerator with Bottom Freezer	6.8%▲	2.3%	34			
Total	100.0%	0.0%	400			



Table 74. AVERAGE REFRIGERATOR VOLUME BY TYPE (Compare to Table 71 in 2011 RBSA)

Refrigerator Type	Volume (cu. ft.)					
,,	Mean	EB	n			
Full Size Refrigerator Only	21.7	NA	2			
Mini Refrigerator	5.2▲	0.3	20			
Refrigerator with Bottom Freezer	22.3▲	0.3	47			
Refrigerator with Side-by-Side Freezer	23.1▲	0.3	85			
Refrigerator with Top Freezer	19.3	0.3	187			
Side-by-Side Refrigerator with Bottom Freezer	24.2	0.4	30			
All Refrigerator Types	19.7	0.1	334			

Table 75. DISTRIBUTION OF FREEZERS BY TYPE IN HOMES WITH FREEZERS (Compare to Table 72 in 2011 RBSA)

Franzar Tuna	Freezers				
Freezer Type	%	EB	n		
Freezer, chest	42.7%	7.0%	75		
Freezer, upright	57.3%	7.0%	89		
Total	100.0%	0.0%	156		

Table 76. AVERAGE FREEZER VOLUME BY TYPE (Compare to Table 73 in 2011 RBSA)

Freezer Type	Freezer Volume (cu. ft.)						
, .	Mean	EB	n				
Freezer, chest	8.3▼	0.7	66				
Freezer, upright	17.6	1.0	77				
All Refrigerator Types	13.0▼	0.6	136				

Table 77. DISTRIBUTION OF CLOTHES WASHERS BY VINTAGE (Compare to Table 74 in 2011 RBSA)

Vintago	Clothes Washers					
Vintage	%	EB	n			
Pre 1980	0.0%	NA	0			
1980-1989	1.6%▼	1.8%	4			
1990-1994	3.2%▼	2.0%	9			
1995-1999	8.0%▼	2.6%	31			
2000-2004	15.3%▼	3.5%	50			
2005-2009	23.6%▼	4.3%	74			
2010-2014	31.4%▲	4.7%	93			
Post 2014	17.0%	4.0%	47			
Total	100.0%	0.0%	308			

Table 78. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND STATE (Compare to Table 75 in 2011 RBSA)

	Percentage of Clothes Washers										
Clothes Washer Type	ID		MT		OR		WA		Regio	n	<b>n</b>
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Horizontal Axis	23.8%	8.4%	16.0%	7.8%	25.5%	7.5%	30.9%	7.2%	27.0% ▲	4.2%	95
Stacked Washer/Dryer	0.0%	0.0%	1.0%	6.1%	2.1%	4.4%	0.0%	0.0%	0.7%▼	1.1%	3
Vertical Axis (with agitator)	67.3%	8.9%	66.9%	9.5%	59.4%▼	8.3%	59.0%	7.5%	60.9% ▲	4.6%	250
Vertical Axis (without agitator)	8.9%	5.5%	16.2%▲	8.1%	13.1%	6.1%	10.1%	4.8%	11.4% ▲	3.0%	46
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	393

#### Table 79. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND VINTAGE (Compare to Table 76 in 2011 RBSA)

		Vintage													
Clothes Washer Type	Pre 1	1980	1980-	1989	1990–2	1994	1995–1	.999	2000–2	.004	2005–2	.009	Post 20	900	_
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	n
Horizontal Axis	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	4.2%	2.3%	12.9%▼	3.3%	22.8%▼	4.2%	19.9% ▲	4.2%	85
Stacked Washer/Dryer	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2
Vertical Axis (with agitator)	0.0%	0.0%	2.8%▼	2.4%	5.4%▼	2.6%	11.8%▼	3.1%	18.8%	3.7%	28.6%	4.6%	11.1%▲	3.2%	185
Vertical Axis (without agitator)	0.0%	0.0%	0.0%	0.0%	3.0%	4.6%	1.3%▼	2.1%	3.9%▼	1.6%	4.7%▼	2.8%	34.0% ▲	4.2%	37
All Clothes Washer Types	0.0%	0.0%	1.6%▼	1.8%	3.2%▼	2.0%	8.0%▼	2.6%	15.3%▼	3.5%	23.6%▼	4.3%	17.0% ▲	4.0%	308

Table 80. AVERAGE NUMBER OF CLOTHES WASHER LOADS PER WEEK BY STATE (Compare to Table 77 in 2011 RBSA)

State	Clothes Washer Loads per Week					
State	Mean	EB	n			
ID	4.2	0.5	85			
MT	4.0	0.5	84			
OR	4.2	0.4	108			
WA	3.7▼	0.3	134			
Region	4.0 ▼	0.2	411			

Table 81. AVERAGE CLOTHES WASHER SIZE (CU. FT.) BY STATE

State	Average Clothes Washer Size (cu. ft.)						
	Mean	EB	n				
ID	3.2	0.1	81				
MT	3.1	0.1	76				
OR	3.3	0.2	101				
WA	3.4	0.1	123				
Region	3.3	3.3 0.1 38					

Table 82. DISTRIBUTION OF CLOTHES DRYERS BY VINTAGE (Compare to Table 78 in 2011 RBSA)

Vintage	Cloth	es Dryer	
Vintage	%	0.8%▼ 1.6% 3.4%▼ 2.3% 5.4%▼ 3.3% 5.4%▼ 2.9% 1 19.3% 4.8% 3 28.0% 8.7% 4 20.3%▲ 4.9% 3 17.4% 8.4% 2	n
Pre 1980	0.8%▼	1.6%	2
1980-1989	3.4%▼	2.3%	7
1990-1994	5.4%▼	3.3%	9
1995-1999	5.4%▼	2.9%	10
2000-2004	19.3%	4.8%	36
2005-2009	28.0%	8.7%	43
2010-2014	20.3%▲	4.9%	39
Post 2014	17.4%	8.4%	23
Total	100.0%	0.0%	169

Table 83. PERCENTAGE OF DRYER LOADS PER WASHER LOAD BY STATE (Compare to Table 79 in 2011 RBSA)

State	Dryer Loads per Washer Load							
State	%	EB	n					
ID	80.5%	5.8%	80					
MT	91.2%	3.7%	83					
OR	88.5%	4.1%	108					
WA	85.8%	4.1%	128					
Region	86.4%	2.4%	399					

**Table 84. DISTRIBUTION OF VENTED DRYERS BY STATE** 

Ctata	Percent of	Percent of Dryers that are Vented							
State	%	n							
ID	97.7%	2.6%	80						
MT	96.6%	3.2%	70						
OR	98.3%	1.9%	103						
WA	97.6%	2.2%	120						
Region	97.8%	1.3%	373						

**Table 85. DISTRIBUTION OF DRYERS BY FUEL TYPE AND STATE** 

					DISTRIBUTIO	N OF DRY	/ERS				
Dryer Fuel	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Electric	95.2%	4.4%	96.7%	4.0%	96.5%	3.3%	96.9%	2.9%	96.5%	1.8%	373
Natural Gas	3.0%	6.1%	1.0%	6.5%	2.2%	4.5%	2.4%	4.7%	2.3%	1.8%	7
Propane	1.8%	11.2%	2.2%	13.7%	1.3%	8.2%	0.7%	4.2%	1.2%	1.3%	4
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	384



Table 86. DISTRIBUTION OF DISHWASHERS BY VINTAGE (Compare to Table 80 in 2011 RBSA)

Vintago	Dish	washers	
Vintage	%	EB	n
Pre 1980	0.4%	2.3%	1
1980-1989	0.9%▼	1.5%	3
1990-1994	3.2%▼	2.5%	7
1995-1999	15.0%	3.9%	42
2000-2004	14.3%▼	4.2%	34
2005-2009	25.0%	4.8%	72
2010-2014	29.6% ▲	5.1%	89
Post 2014	11.6%	3.3%	37
Total	100.0%	0.0%	285

Table 87. AVERAGE NUMBER OF DISHWASHER LOADS PER WEEK (Compare to Table 81 in 2011 RBSA)

State	Dishwasher Loads per Week							
State	Mean	EB	n					
ID	2.9▲	0.4	85					
MT	2.6	0.5	84					
OR	2.7	0.3	108					
WA	3.0 ▲	0.3	134					
Region	2.9▲	0.2	411					

Table 88. DISTRIBUTION OF COOK TOP FUEL BY TYPE (Compare to Table 82 in 2011 RBSA)

Fuel	Cook	Cook Top Fuel						
Type	%	EB	n					
Electric	89.5%	2.5%	346					
Gas	8.7%	2.3%	47					
Propane	1.8%▼	1.2%	9					
Total	100.0%	0.0%	402					

Table 89. DISTRIBUTION OF OVEN FUEL BY TYPE (Compare to Table 83 in 2011 RBSA)

Fuel	Ov	en Fuel	
Туре	%	EB	n
Electric	90.6%	2.3%	353
Gas	8.1%	2.3%	44
Propane	1.3%▼	0.9%	8
Total	100.0%	0.0%	405

Table 90. PERCENTAGE OF APPLIANCES THAT ARE WI-FI COMPATIBLE BY APPLIANCE TYPE AND STATE

		Percent of Appliances that are Wi-Fi Enabled										
Туре	ID		MT		0	OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	n	
Clothes Dryer	0.0%	0.0%	0.0%	0.0%	0.9%	1.5%	2.4%	2.4%	1.4%	1.2%	385	
Freezer	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	153	
Refrigerator	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.0%	1.6%	0.5%	0.7%	410	
Stove/Oven	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.8%	1.3%	0.4%	0.6%	404	
Clothes Washer	0.0%	0.0%	0.0%	0.0%	1.3%	2.1%	1.7%	1.9%	1.2%	1.1%	386	

Table 91. DISTRIBUTION OF WATER HEATER FUEL BY STATE (Compare to Table 84 in 2011 RBSA)

Water Heater Fuel Type		Water Heaters										
	ID		MT		OR		WA		Region		5	
	%	EB	%	EB	%	EB	%	EB	%	EB	n	
Electric	73.3%	8.5%	53.2%	9.3%	90.4%	5.3%	91.3%	4.3%	85.5%	2.9%	293	
Natural Gas	18.1%	6.9%	34.4%	7.4%	9.6%	5.9%	7.0%	4.4%	11.6%	2.7%	66	
Propane	8.6%	6.9%	12.4%	7.8%	0.0%	0.0%	1.7%	3.6%	3.0%	1.4%	15	
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	374	

Table 92. DISTRIBUTION OF WATER HEATER LOCATION BY STATE (Compare to Table 85 in 2011 RBSA)

Water Heater					Wate	r Heaters					
	ID		MT	MT		OR		WA		Region	
Location	%	EB	%	EB	%	EB	%	EB	%	EB	n
Basement	0.0%	0.0%	4.2%	8.3%	0.0%	0.0%	0.0%	0.0%	0.3%	0.7%	2
Crawlspace	0.0%	0.0%	0.9%	5.7%	0.0%	0.0%	1.5% ▲	1.3%	0.8%	0.5%	3
Garage	3.2%	6.6%	0.9%	5.7%	1.4%	3.0%	0.0%	0.0%	1.0%	0.9%	5
Main House	78.5%	7.6%	69.2%	9.2%	74.8%	7.4%	76.2%	5.9%	75.5%	3.8%	298
Other	18.3%	7.1%	24.8%	8.6%	23.7%	7.4%	22.3%	6.0%	22.4%	3.8%	95
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	399

Table 93. DISTRIBUTION OF WATER HEATERS BY DETAILED TYPE

Detailed Type	Distribution	of Water H	Heaters
Detailed Type	%	EB	n
Instantaneous-Electric Resistance	0.3%	0.7%	2
Instantaneous-Fossil Fuel Condensing	1.0%	1.5%	3
Instantaneous-Fossil Fuel Non-Condensing	0.7%	0.8%	4
Storage-Electric Heat Pump (Packaged)	0.7%	1.5%	2
Storage-Electric Resistance	85.1%	3.0%	289
Storage-Fossil Fuel Condensing	0.9%	0.9%	6
Storage-Fossil Fuel Non-Condensing	11.2%	2.6%	63
Storage-Indirect Water Heater	0.1%	0.5%	1
Total	100.0%	0.0%	369

Table 94. DISTRIBUTION OF ALL WATER HEATER LOCATIONS BY SPACE HEATING FUEL TYPE (Compare to Table 86 in 2011 RBSA)

Water				All Wat	er Heater	s by Space	Heating I	uel			
Heater	Electric		Natural Gas		Oil		Pellets		Wood		_
Location	%	EB	%	EB	%	EB	%	EB	%	EB	n
Basement	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2
Crawlspace	46.9%	0.0%	53.1%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	3
Garage	68.0%▼	5.4%	24.1%	0.0%	0.0%	0.0%	0.0%	0.0%	8.0%	14.5%	5
Main House	72.2%	4.0%	15.1%	3.3%	0.5%	1.1%	2.3%	1.8%	6.3%▼	2.4%	298
Other	81.2% ▲	2.2%	12.3%	2.0%	0.0%	0.0%	1.8%	3.9%	3.0%▼	5.5%	26

Table 95. DISTRIBUTION OF WATER HEATERS BY VINTAGE (Compare to Table 87 in 2011 RBSA)

Vintago	Water	Heaters	
Vintage	%	EB	n
Pre 1990	3.3%▼	2.2%	10
1990-1999	19.1%▼	4.5%	51
2000-2004	19.9%	4.7%	46
2005-2009	26.5%	5.0%	77
2010-2014	23.1%▲	4.7%	64
Post 2014	8.1%	3.3%	19
Total	100.0%	0.0%	265

Table 96. AVERAGE NUMBER OF SHOWERHEADS AND FAUCETS PER HOME BY STATE

	Average Number of Showerheads and Faucets per Home											
Fixture Type	ID		OR		MT		WA		Region		n	
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n	
Bathroom Faucet	2.03	0.15	2.04	0.18	2.11	0.13	1.97	0.11	2.03	0.07	403	
Kitchen Faucet	0.94	0.05	0.99	0.07	0.98	0.05	1.00	0.04	0.98	0.02	403	
Shower	0.62	0.14	0.52	0.10	0.62	0.10	0.47	0.08	0.54	0.05	403	
Shower / Bathtub combo with diverter valve	0.98	0.14	0.97	0.12	0.92	0.11	0.90	0.09	0.92	0.06	403	
Shower / Bathtub combo with separate valve	0.00	0.00	0.02	0.02	0.03	0.03	0.04	0.03	0.03	0.02	403	



Table 97. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE (Compare to Table 88 in 2011 RBSA)

51 D .					Show	erheads					
Flow Rate (GPM)	ID		MT		OR	OR		WA		Region	
(GFIVI)	%	EB	%	EB	%	EB	%	EB	%	EB	n
< 1.5	7.5%	5.1%	23.1%	8.8%	9.2%	5.5%	11.0%	5.2%	10.9%	3.0%	47
1.6-2.0	28.2%	8.8%	30.6%	9.7%	19.0%	7.2%	25.5%	6.7%	24.2%▼	4.0%	92
2.1-2.5	28.6%▼	8.4%	27.3%	8.7%	44.0% ▲	8.7%	39.8%	7.4%	38.6%	4.5%	137
2.6-3.5	35.7% ▲	9.3%	15.8%	7.9%	24.2%	7.0%	21.0%	6.5%	23.5% ▲	3.9%	94
> 3.6	0.0%	0.0%	3.2%	6.7%	3.6%▼	4.0%	2.7%	3.7%	2.7%▼	1.8%	9
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	379

Table 98. PERCENTAGE OF HOMES WITH SHOWERHEADS ABOVE 2.0 GPM BY STATE

State		Homes with Showerheads Above 2.0 GPM						
	%	EB	n					
ID	67.5%	8.9%	83					
MT	49.4%	10.0%	76					
OR	72.5%	7.8%	101					
WA	63.5%	7.1%	119					
Region	65.7%	4.4%	379					

Table 99. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE

Flow					Showerhe	ead Flow	Rate				
Rate	ID		ID MT		OR		WA		Region		2
(GPM)	%	EB	%	EB	%	EB	%	EB	%	EB	n
< 2.5	51.6%	9.6%	70.5%	9.3%	59.2%	8.1%	53.2%	7.9%	56.3%	4.7%	216
≥ 2.5	48.4%	9.6%	29.5%	9.6%	40.8%	8.1%	46.8%	8.0%	43.7%	4.7%	163
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	379



Table 100. DISTRIBUTION OF BATHROOM FAUCET FLOW RATE BY STATE

Flow					Bathroom F	aucet Flo	w Rate				
Rate	ID		MT		OR WA				Regio	n	
(GPM)	%	EB	%	EB	%	EB	%	EB	%	EB	n
≤ 2.2	59.0%	9.4%	60.8%	9.6%	60.0%	8.0%	49.6%	7.4%	55.1%	4.5%	218
> 2.2	41.0%	9.5%	39.2%	9.7%	40.0%	8.0%	50.4%	7.4%	44.9%	4.5%	177
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	395



Table 101. DISTRIBUTION OF KITCHEN FAUCET FLOW RATE BY STATE

Flow	Kitchen Faucet Flow Rate												
Rate	ID	ID MT OR			WA		Region		5				
(GPM)	%	EB	%	EB	%	EB	%	EB	%	EB	n		
≤ 2.2	67.0%	9.1%	73.7%	8.5%	57.4%	8.3%	64.1%	7.2%	63.2%	4.4%	241		
> 2.2	33.0%	9.2%	26.3%	8.8%	42.6%	8.3%	35.9%	7.3%	36.8%	4.5%	139		
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	380		



Table 102. AVERAGE NUMBER OF TELEVISIONS PER HOME BY STATE (Compare to Table 89 in 2011 RBSA)

State	Televisions per Home						
State	Mean	EB	n				
ID	1.94	0.19	85				
MT	1.86	0.21	84				
OR	1.97	0.15	108				
WA	1.91	0.15	134				
Region	1.93	0.09	411				

Table 103. AVERAGE TELEVISION POWER BY VINTAGE (Compare to Table 90 in 2011 RBSA)

Vintage	Televisio	on Power	(W)
Vintage	Mean	EB	n
Pre 1990	54.5	NA	2
1990-1994	78.5	13.3	5
1995-1999	66.7▼	3.0	9
2000-2004	80.5	3.6	25
2005-2009	124.1	9.3	71
2010-2014	71.1▼	5.1	112
Post 2014	58.6	3.8	45
Unknown Vintage	77.6	6.1	171
All Vintages	80.3▼	2.3	312

# Table 104. DISTRIBUTION OF TELEVISION SCREENS BY TYPE AND VINTAGE (Compare to Table 91 in 2011 RBSA)

						Television	Screens						
Vintage	CRT		LCD		LED		LED+LCD		Plasma		Other		_
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1990	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2
1990-1994	84.7%▼	6.1%	15.3%	19.7%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	7
1995-1999	96.6%	1.6%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	3.4%	5.4%	10
2000-2004	86.6%▼	2.5%	4.1%	7.9%	0.0%	0.0%	0.0%	0.0%	8.6%	1.5%	0.7%	1.8%	32
2005-2009	12.2%▼	3.6%	68.1%	4.5%	1.5%	1.8%	1.3%	1.5%	15.8%	3.6%	1.1%	1.3%	101
2010-2014	0.0%	0.0%	57.3%	5.1%	35.0%	4.9%	2.4%	2.1%	5.4%	2.4%	0.0%	0.0%	162
Post 2014	0.0%	0.0%	21.5%	4.1%	77.8%	3.9%	0.0%	0.0%	0.7%	2.4%	0.0%	0.0%	68
All Vintages	11.4%▼	3.2%	47.6%	5.4%	31.3%	4.9%	1.4%	1.4%	7.9%	3.0%	0.5%	0.6%	288



Table 105. DISTRIBUTION OF TELEVISIONS BY ROOM TYPE (Compare to Table 92 in 2011 RBSA)

<b>D</b>	Tele	visions	
Room	%	EB	n
Bathroom	0.3%	0.4%	2
Bedroom	45.3% ▲	3.0%	252
Closet	0.1%	0.2%	1
Dining Room	1.0%	0.7%	7
Family Room	10.5%	1.6%	79
Garage	0.2%	0.3%	2
Hall	0.2%	0.2%	1
Kitchen	1.5%	0.7%	14
Laundry	0.0%▼	0.1%	1
Living Room	39.3%	1.1%	304
Office	1.3%▼	0.7%	11
Other	0.4%	0.4%	2
Total	100.0%	0.0%	396

Table 106. AVERAGE PRIMARY TELEVISION ON-TIME HOURS PER DAY PER HOME BY STATE (Compare to Table 93 in 2011 RBSA)

State	Television On-Time per Home (hours/day)		
	Mean	EB	n
ID	6.8▼	0.8	80
MT	6.1	1.0	83
OR	6.7	0.9	107
WA	7.6	1.0	126
Region	7.1	0.6	396

Table 107. AVERAGE NUMBER OF SET-TOP BOXES PER HOME BY STATE (Compare to Table 94 in 2011 RBSA)

Ctata	Set-Top Boxes per Home		
State	Mean	EB	n
ID	0.92▼	0.20	85
MT	1.04	0.23	84
OR	1.21▼	0.17	108
WA	1.10	0.15	134
Region	1.10▼	0.09	411

Table 108. PERCENTAGE OF HOMES WITH SET-TOP BOXES (Compare to Table 95 in 2011 RBSA)

Ctata	Homes with Set-Top Boxes		
State	%	EB	n
ID	54.3%▼	8.5%	85
MT	64.5%	9.5%	84
OR	70.3%▼	7.5%	108
WA	68.0%	6.9%	134
Region	66.6%▼	4.2%	411



Table 109. PERCENTAGE OF SET-TOP BOXES WITH DVR CAPABILITY BY STATE (Compare to Table 96 in 2011 RBSA)

Ctata	Set-Top Boxes with DVR		
State	%	EB	n
ID	51.9% ▲	13.5%	39
MT	56.7% ▲	12.6%	53
OR	54.8% ▲	10.2%	76
WA	52.2% ▲	9.1%	84
Region	53.3% ▲	5.7%	252

Table 110. PERCENTAGE OF HOMES WITH GAMING SYSTEMS (Compare to Table 97 in 2011 RBSA)

Ctata	Homes with Gaming Systems		
State	%	EB	n
ID	23.5%	7.9%	85
MT	26.2%	8.8%	84
OR	23.6%	7.0%	108
WA	27.4%	6.4%	134
Region	25.6%	3.9%	411

Table 111. AVERAGE NUMBER OF GAMING SYSTEMS PER HOME

State	Gaming Systems per Home		
State	Mean	EB	n
ID	0.30	0.11	85
MT	0.39	0.16	84
OR	0.35	0.13	108
WA	0.41	0.11	134
Region	0.38	0.07	411

Table 112. AVERAGE NUMBER OF COMPUTERS PER HOME BY STATE (Compare to Table 99 in 2011 RBSA)

	1		
State	Computers per Home		
State	Mean	EB	n
ID	0.92	0.16	85
MT	0.94	0.21	84
OR	1.08▼	0.16	108
WA	1.01	0.15	134
Region	1.01	0.09	411

Table 113. PERCENTAGE OF HOMES WITH COMPUTERS BY STATE (Compare to Table 100 in 2011 RBSA)

State	Homes with Computers		
State	%	EB	n
ID	66.2%	8.7%	85
MT	62.1%	8.8%	84
OR	75.7%	6.9%	108
WA	68.7%	6.7%	134
Region	70.0%	4.0%	411

Table 114. AVERAGE NUMBER OF AUDIO SYSTEMS PER HOME BY STATE (Compare to Table 101 in 2011 RBSA)

State	Audio Systems per Home		
State	Mean	EB	n
ID	0.45▼	0.13	85
MT	0.90	0.30	84
OR	0.61▼	0.18	108
WA	0.47▼	0.10	134
Region	0.55▼	0.08	411

Table 115. AVERAGE NUMBER OF SUBWOOFERS PER HOME BY TYPE (Compare to Table 102 in 2011 RBSA)

Subwoofer	Subwoofers per Home		
Type	Mean	EB	n
Passive	0.12	0.04	411
Powered	0.06▼	0.02	411
All Subwoofers	0.09▼	0.02	411

Table 116. AVERAGE NUMBER OF OCCUPANTS PER HOME BY STATE (Compare to Table 104 in 2011 RBSA)

Ctata	Occupants per Home		
State	Mean	EB	n
ID	2.58	0.29	85
MT	2.34	0.30	84
OR	2.48	0.28	108
WA	2.38	0.25	134
Region	2.44	0.15	411

Table 117. AVERAGE NUMBER OF OCCUPANTS BY AGE CATEGORY BY STATE (Compare to Table 105 in 2011 RBSA)

		Number of Occupants									
Age Category	ID		MT		OR		WA		Region		2
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	n
18 Years or Younger	0.67	0.26	0.59	0.24	0.48	0.24	0.58▼	0.18	0.56	0.12	411
Between 19 and 64	1.40	0.17	1.14	0.20	1.21	0.18	1.22	0.17	1.24	0.10	411
65 Years or Older	0.51	0.14	0.61	0.16	0.80	0.15	0.58	0.10	0.64	0.07	411
All Ages	2.58	0.29	2.34	0.30	2.48	0.28	2.38	0.25	2.44	0.15	411

## Table 118. DISTRIBUTION OF HOMES BY OWNERSHIP TYPE AND STATE (Compare to Table 106 in 2011 RBSA)

		Percentage of Homes									
Ownership Type	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Occupy without rent	0.0%	0.0%	0.9%	5.7%	0.6%	4.0%	0.5%	3.0%	0.5%	0.7%	3
Own / buying	90.5%	4.9%	84.5%	7.2%	95.3%▲	3.6%	90.0%▲	4.1%	91.3%▲	2.4%	370
Prefer not to say	1.1%	6.6%	0.0%	0.0%	0.0%	0.0%	2.0%	2.7%	1.1%	1.2%	4
Rent	8.4%	5.2%	14.6%	7.5%	4.1%▼	4.4%	7.6%▼	4.1%	7.2%▼	2.3%	34
All Types	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411

Table 119. PERCENTAGE OF HOMES AS PRIMARY RESIDENCE BY STATE (Compare to Table 107 in 2011 RBSA)

Ctata	Homes as Pri	Homes as Primary Residence						
State	%	EB	n					
ID	100.0%	0.0%	85					
MT	99.1%	1.5%	84					
OR	99.4%	1.1%	108					
WA	100.0%	0.0%	134					
Region	99.7% ▲	0.4%	411					

Table 120. DISTRIBUTION OF HOMES WITH ELECTRIC FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE (Compare to Table 109 in 2011 RBSA)

	Homes with Electric Fuel Assistance										
Percentage of Assistance	ID		MT	MT		OR		WA		Region	
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Less than 25%	5.3%▼	5.6%	14.2%	7.2%	1.3%▼	2.6%	2.6%	3.4%	3.5%	1.5%	21
Between 26% and 50%	1.1%	7.1%	0.0%	0.0%	1.6%	3.1%	2.5%	3.3%	1.8%	1.5%	6
Between 51% and 75%	0.0%	0.0%	1.0%	6.2%	0.8%	5.0%	1.0%	6.0%	0.8%	1.2%	3
Between 76% and 100%	0.0%	0.0%	1.0%	6.2%	0.0%	0.0%	0.6%▼	4.0%	0.4%▼	0.9%	2
No Utility Bill Assistance	93.6%	4.7%	83.8%	7.0%	96.2%	2.6%	93.4%	3.7%	93.5%▲	2.1%	360
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	392

Table 121. DISTRIBUTION OF HOMES WITH GAS FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE (Compare to Table 110 in 2011 RBSA)

		Homes with Gas Fuel Assistance											
Percentage of Assistance	ID		MT		OR		WA		Region				
	%	EB	%	EB	%	EB	%	EB	%	EB	n		
Less than 25%	0.0%	0.0%	8.5%	6.3%	0.0%	0.0%	0.0%	0.0%	0.9%	0.7%	6		
Between 26% and 50%	3.8%	23.4%	0.0%	0.0%	3.3%	18.8%	0.0%	0.0%	1.5%	3.0%	2		
Between 51% and 75%	0.0%	0.0%	1.4%	8.9%	0.0%	0.0%	5.7%	32.8%	2.7%	6.9%	2		
Between 76% and 100%	0.0%	0.0%	1.4%	8.9%	0.0%	0.0%	0.0%	0.0%	0.2%▼	1.0%	1		
No Utility Bill Assistance	96.2%	6.3%	88.6%	6.1%	96.7%	5.4%	94.3%	9.3%	94.7%	4.3%	84		
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	95		

Table 122. AVERAGE HEATING THERMOSTAT SETPOINT BY STATE (Compare to Table 111 in 2011 RBSA)

State	Heating Thermostat Setpoir (°F)					
	Mean	EB	n			
ID	69.8▼	0.7	81			
MT	68.9	0.8	81			
OR	69.7	0.5	106			
WA	68.6	0.6	130			
Region	69.1	0.3	398			

Table 123. PERCENTAGE OF HOMES REPORTING A HEATING SETBACK BY STATE (Compare to Table 112 in 2011 RBSA)

Ctata	Homes Reporting Heating Setback								
State	%	EB	n						
ID	45.7%	9.5%	77						
MT	42.2%▼	9.7%	80						
OR	59.6%	8.4%	99						
WA	63.7%	7.5%	113						
Region	58.2%	4.6%	369						

Table 124. AVERAGE SIZE OF HEATING SETBACK BY STATE (Compare to Table 113 in 2011 RBSA)

State	Heating Setback (°F)						
State	Mean	EB	n				
ID	2.1▼	0.6	77				
MT	2.1▼	0.8	80				
OR	3.5 ▼	0.8	99				
WA	4.5 ▼	0.8	113				
Region	3.6▼	0.5	369				

Table 125. AVERAGE COOLING THERMOSTAT SETPOINT BY STATE (Compare to Table 114 in 2011 RBSA)

State	Cooling Thermostat Setpoint (°F)					
	Mean	EB	n			
ID	72.9	0.9	72			
MT	71.1▼	1.2	51			
OR	71.9	0.9	66			
WA	71.8	0.9	78			
Region	71.9	0.5	267			

Table 126. PERCENTAGE OF HOMES REPORTING A COOLING THERMOSTAT SETUP BY STATE (Compare to Table 115 in 2011 RBSA)

State	Homes Reporting Cooling Setup							
State	%	EB	n					
ID	25.5% ▲	10.4%	56					
MT	0.0%	0.0%	32					
OR	11.7%	7.5%	51					
WA	10.5%	7.1%	58					
Region	12.0%	4.3%	197					

Table 127. DISTRIBUTION OF THERMOSTATS BY TYPE AND STATE

		Distribution of Thermostats											
Thermostat Type	ID		MT		OR		WA		Region				
	%	EB	%	EB	%	EB	%	EB	%	EB	n		
Manual thermostat - Analog	28.7%	8.7%	48.6%	10.2%	31.8%	7.7%	25.2%	6.5%	29.7%	4.0%	131		
Manual thermostat - Digital	30.5%	8.9%	20.3%	7.0%	20.5%	7.0%	13.9%	5.3%	18.7%	3.5%	86		
Programmable thermostat	38.6%	9.4%	28.8%	9.5%	43.7%	8.3%	56.9%	7.3%	47.9%	4.5%	174		
Smart thermostat	0.0%	0.0%	0.0%	0.0%	0.9%	5.5%	0.0%	0.0%	0.3%	1.8%	1		
Smart/Wi-Fi thermostat	1.1%	6.9%	0.0%	0.0%	1.3%	7.8%	0.5%	3.0%	0.8%	1.1%	3		
Wi-Fi enabled thermostat	0.0%	0.0%	2.2%	13.7%	1.9%	4.2%	3.2%	3.4%	2.3%	1.7%	7		
None	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.4%	2.6%	0.2%	1.2%	1		
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	396		

Table 128. PERCENTAGE OF HOMES WITH AT LEAST ONE SMART POWER STIP BY STATE

State	Homes wi	Homes with Smart Power Strips							
State	%	EB	n						
ID	0.0%	0.0%	85						
MT	3.0%	3.8%	84						
OR	3.4%	2.4%	108						
WA	0.9%	1.1%	134						
Region	1.8%	1.0%	411						

Table 129. DISTRIBUTION OF POWER STRIPS BY USE TYPE

	DISTRIBUTION OF POWER STRIPS										
Power Strip Use	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	n
Entertainment Center	52.0%	13.1%	35.0%	13.6%	39.9%	10.1%	57.6%	11.9%	49.1%	6.6%	148
Home Office	30.5%	12.6%	25.4%	13.8%	33.1%	9.9%	25.7%	11.2%	28.7%	6.2%	98
Other	17.5%	10.7%	39.7%	15.2%	27.0%	9.1%	16.8%	7.0%	22.2%	4.6%	73
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	209



Table 130. PERCENTAGE OF HOUSEHOLDS REPORTING GAS SERVICE BY STATE (Compare to Table 116 in 2011 RBSA)

State	Households Reporting Gas Service						
State	%	EB	n				
ID	30.6%	8.6%	85				
MT	53.5%	8.8%	83				
OR	13.9%	5.7%	107				
WA	10.8%	4.6%	130				
Region	17.9%	3.1%	405				

Table 131. DISTRIBUTION OF WOOD USE AS HEATING FUEL BY STATE (Compare to Table 117 in 2011 RBSA)

Annual		Homes Using Wood Fuel									
Wood	ID		MT		OR		WA		Region		<b>n</b>
Use	%	EB	%	EB	%	EB	%	EB	%	EB	n
< 1 Cord	1.1%	6.6%	0.0%	0.0%	1.3%	2.6%	4.6% ▲	3.3%	2.7% ▲	1.6%	10
1-3 Cords	9.8%	6.6%	12.8%	7.4%	13.5%	5.9%	8.0%▼	4.0%	10.4%	2.7%	44
4-6 Cords	4.8%▼	6.2%	10.3%	7.7%	4.0%	4.1%	4.3%	3.8%	4.8%▼	2.0%	18
> 6 Cords	0.0%	0.0%	3.0%	6.6%	1.3%	7.8%	0.0%	0.0%	0.6%	1.0%	3
None	84.4%	6.8%	73.8%	8.8%	80.0%	6.6%	83.1%	5.2%	81.5%	3.4%	336
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411

# Table 132. DISTRIBUTION OF PELLET FUEL USE BY STATE (Compare to Table 118 in 2011 RBSA)

Annual	Homes Using Pellet Fuel										
Pellet	ID		MT		OR		WA		Regio	n	
Fuel Use	%	EB	%	EB	%	EB	%	EB	%	EB	n
< 1 Ton	1.1%	6.6%	3.0%	6.6%	0.0%	0.0%	2.2%	2.9%	1.4%	1.2%	6
1-2 Tons	1.1%	6.6%	0.0%	0.0%	1.5%	2.9%	1.6%	3.3%	1.4%	1.3%	5
2-4 Tons	4.0%	5.4%	0.0%	0.0%	2.1%	4.3%	2.2%	2.9%	2.2%	1.5%	8
None	93.9%	4.5%	97.0%	3.8%	96.5%	2.9%	94.1%	3.4%	95.0%	2.0%	392
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411

## Table 133. DISTRIBUTION OF OIL FUEL USE BY STATE (Compare to Table 119 in 2011 RBSA)

A		Homes Using Oil Fuel											
Annual Oil Fuel Use	ID		MT		OR		WA		Region		<b>n</b>		
Use	%	EB	%	EB	%	EB	%	EB	%	EB	n		
< 100 Gallons	0.0%	0.0%	0.0%	0.0%	0.8%	5.0%	0.0%	0.0%	0.3%	1.6%	1		
100-250 Gallons	2.9%	6.0%	2.1%	13.0%	0.0%	0.0%	0.0%	0.0%	0.6%	0.8%	3		
251-500 Gallons	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0		
None	97.1%	3.4%	97.9%	3.4%	99.2%	1.3%	100.0%	0.0%	99.2%	0.7%	407		
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411		

#### Table 134. DISTRIBUTION OF PROPANE FUEL USE BY STATE (Compare to Table 120 in 2011 RBSA)

	Homes Using Propane Fuel											
Annual Propane Fuel Use	ID		MT		OR		WA		Region			
	%	EB	%	EB	%	EB	%	EB	%	EB	n	
< 50 Gallons	1.8%	11.2%	3.0%	6.6%	0.9%	5.7%	0.5%	3.0%	1.0%	1.0%	5	
50-250 Gallons	0.0%	0.0%	4.0%	5.7%	0.8%▼	5.0%	1.5%	3.1%	1.3%▼	1.1%	6	
251-500 Gallons	2.1%	4.3%	7.3%	7.4%	0.0%	0.0%	0.8%	4.9%	1.3%	1.0%	7	
501-1000 Gallons	1.1%	6.6%	5.8%	5.5%	0.0%	0.0%	0.0%	0.0%	0.6%	0.5%	6	
> 1000 Gallons	1.8%	11.2%	3.0%	6.6%	0.0%	0.0%	0.0%	0.0%	0.5%	0.7%	3	
None	93.1% ▲	5.0%	76.9%	8.6%	98.2% ▲	2.0%	97.2%	2.3%	95.3% ▲	1.6%	384	
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	411	

Table 135. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT SELF-FUNDED CONSERVATION BY STATE (Compare to Table 121 in 2011 RBSA)

State	Households Reporting Recent Self-Funded Conservation Improvements						
	% EB n						
ID	51.2% ▲	9.3%	85				
MT	59.4%	9.6%	84				
OR	60.0% ▲	8.1%	107				
WA	54.5% ▲	6.8%	134				
Region	56.2% ▲	4.3%	410				

Table 136. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT USE OF UTILITY CONSERVATION PROGRAMS BY STATE (Compare to Table 122 in 2011 RBSA)

State	Households F Utility	Reporting Incentives					
	%	EB	n				
ID	10.2%▼	5.3%	78				
MT	6.7%▼	4.0%	80				
OR	8.4%▼	4.3%	100				
WA	12.9%	5.1%	119				
Region	10.6%▼	10.6%▼ 2.8% 377					



Table 137. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF CONSERVATION TAX CREDITS (Compare to Table 123 in 2011 RBSA)

State	Households Reporting Recer Conservation Tax Credits				
	%	EB	n		
ID	8.0%	7.7%	44		
MT	4.8%	4.5%	49		
OR	6.4%	5.1%	65		
WA	11.6% ▲	6.3%	74		
Region	8.9%	3.5%	232		



#### Table 138. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF BOTH UTILITY AND TAX CREDIT CONSERVATION PROGRAMS

(Compare to Table 124 in 2011 RBSA)

State	Households Reporting Use Utility and Tax Credit Conservation Programs						
	% EB n						
ID	1.1%	1.9%	78				
MT	0.0%	0.0%	80				
OR	2.7%	2.7%	100				
WA	4.8% 3.2% 119						
Region	3.2%	1.7%	377				

Table 139. PERCENT OF HOMES REPORTING HAVING COMPLETED AN ENERGY AUDIT IN THE LAST TWO YEARS

State	Homes Re	Homes Reporting Energy Audit					
State	%	EB	n				
ID	6.4%	4.2%	81				
MT	13.3%	7.1%	81				
OR	5.5%	4.0%	100				
WA	1.8%	1.7%	124				
Region	4.5%	1.7%	386				

Table 140. PERCENTAGE OF HOUSEHOLDS WITH AN ELECTRIC VEHICLE

State	Home with Electric Vehicles					
State	%	EB	n			
ID	0.0%	0.0%	85			
MT	0.0%	0.0%	84			
OR	1.3%	1.5%	108			
WA	0.4%	0.7%	134			
Region	0.6%	0.6%	411			

Table 141. PERCENTAGE OF HOUSEHOLDS WITH SOLAR PANELS

State	Homes with Solar Panels				
State	%	EB	n		
ID	0.0%	0.0%	85		
MT	0.9%	1.5%	84		
OR	0.0%	0.0%	108		
WA	0.8%	1.3%	134		
Region	0.4%	0.6%	411		



Table 142. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF SMART EQUIPMENT

State	Homes with Smart Equipment				
State	%	EB	n		
ID	4.2%	3.4%	85		
MT	0.0%	0.0%	84		
OR	2.2%	2.5%	108		
WA	4.0%	2.7%	134		
Region	3.1%	1.5%	411		

Table 143. DISTRIBUTION OF HOUSEHOLD INCOME BY STATE

	Household Income										
Household Income Level	ID		M	Γ	OR		WA	1	Regio	n	n
	%	EB	%	EB	%	EB	%	EB	%	EB	11
Less than \$25,000	48.4%	9.7%	52.6%	10.8%	41.0%	8.9%	37.3%	7.6%	41.2%	4.7%	155
\$25,000 or more, but less than \$50,000	25.1%	8.4%	27.3%	10.0%	32.4%	8.5%	40.7%	8.0%	34.9%	4.7%	114
\$50,000 or more	26.5%	8.8%	20.1%	8.9%	26.6%	8.2%	22.0%	6.4%	23.9%	4.1%	82
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	351

Table 144. AVERAGE ANNUAL KWH PER HOME BY STATE (Compare to Table 125 in 2011 RBSA)

Ctata	kWh p	er Home	
State	Mean	EB	n
ID	14,962.7▼	1,422.2	76
MT	10,666.5	1,228.4	72
OR	13,555.2	1,025.6	97
WA	15,531.3 ▼	935.3	120
Region	14,430.2 ▼	581.5	365



Ctata	kWh per Home				
State	Mean	EB	n		
ID	14,612.7	1,418.4	76		
MT	10,756.4	1,255.3	72		
OR	13,213.7	1,035.3	97		
WA	15,374.4▼	903.6	120		
Region	14,209.1 ▼	572.6	365		

Table 146. AVERAGE ELECTRIC EUI PER HOME BY HEATING FUEL TYPE AND STATE (Compare to Table 127 in 2011 RBSA)

	Electric EUI per Home (kWh/sq. ft.)						
State	Other Heat		Electric Heat		All Homes		n
	Mean	EB	Mean	EB	Mean	EB	n
ID	8.9▼	1.0	14.4	1.0	11.6▼	0.7	75
MT	7.1▼	1.0	13.1	2.2	10.1	1.1	72
OR	8.8▲	0.7	10.8▼	0.8	9.8▼	0.5	97
WA	7.8▼	0.8	13.3▼	0.9	10.7▼	0.6	120
Region	8.2▼	0.4	12.7▼	0.5	10.5▼	0.3	364

Table 147. AVERAGE ESTIMATED ANNUAL ELECTRIC SPACE HEAT PER HOME BY STATE (Compare to Table 128 in 2011 RBSA)

State	Space Heat per Home (kWh)					
State	Mean	EB	n			
ID	8,100.9	1,698.8	43			
MT	8,175.8	5,604.8	8			
OR	6,836.9	918.5	78			
WA	8,129.4▼	850.0	99			
Region	7,720.2 ▼	664.7	228			

Table 148. AVERAGE ANNUAL GAS USE PER HOME BY STATE (Compare to Table 129 in 2011 RBSA)

State	Therms		
State	Mean	EB	n
ID	579.4	110.1	11
MT	604.5 ▼	58.2	38
OR	452.9	93.1	12
WA	539.6	253.1	8
Region	527.2	87.1	69

Table 149. AVERAGE WEATHER NORMALIZED GAS USE PER HOME BY STATE (Compare to Table 130 in 2011 RBSA)

Ctata	Therms per Home				
State	Mean	EB	n		
ID	577.4	104.3	11		
MT	617.2	53.3	38		
OR	438.2	93.7	12		
WA	550.7	264.5	8		
Region	528.1	90.3	69		

Table 150. AVERAGE GAS EUI PER HOME BY HEATING FUEL AND STATE (Compare to Table 131 in 2011 RBSA)

	Gas EUI per Home (Therms/sq. ft.)							
State	Other F	Other Heat		Other Heat Gas Heat		All Homes		5
	Mean	EB	Mean	EB	Mean	EB	n	
ID	0.27	NA	0.58	0.18	0.43	0.09	10	
MT	0.49	0.10	0.53▼	0.09	0.51▼	0.05	38	
OR	0.16▼	0.06	0.36▼	0.03	0.26▼	0.02	12	
WA	0.25	NA	0.45▼	0.08	0.35▼	0.04	8	
Region	0.26▲	0.01	0.45▼	0.04	0.36▼	0.02	68	

Table 151. AVERAGE ESTIMATED GAS SPACE HEAT BY STATE (Compare to Table 132 in 2011 RBSA)

State	Space Heat per Home (Therms)				
State	Mean	EB	n		
ID	433.5▼	82.1	9		
MT	555.6	66.6	35		
OR	302.3 ▼	47.4	9		
WA	487.3	117.4	6		
Region	428.6▼	37.9	59		

Table 152. AVERAGE ANNUAL ELECTRICITY AND GAS USE PER HOME BY STATE (Compare to Table 133 in 2011 RBSA)

Ctata	kBtu per Home					
State	Mean	EB	n			
ID	60,985.6	5,637.8	65			
MT	67,586.3	6,185.3	60			
OR	52,875.7	3,785.3	97			
WA	57,598.6	3,792.9	117			
Region	57,378.9▼	2,308.0	339			

Table 153. AVERAGE ELECTRICITY AND GAS EUI BY STATE (Compare to Table 134 in 2011 RBSA)

State	EUI per Home (kBtu/sq. ft.)					
	Mean	EB	n			
ID	51.2	4.8	65			
MT	50.9▼	7.2	60			
OR	41.3	2.9	97			
WA	45.9▼	3.4	117			
Region	45.6▼	2.0	339			

Table 154. AVERAGE WEATHER-NORMALIZED ELECTRICITY AND GAS EUI BY STATE (Compare to Table 135 in 2011 RBSA)

State	EUI per Home (kBtu/sq. ft.)					
	Mean	EB	n			
ID	50.0	4.8	65			
MT	51.2▼	7.0	60			
OR	40.3	3.0	97			
WA	45.6▼	3.4	117			
Region	45.0▼	2.0	339			

Table 155. AVERAGE ANNUAL OTHER FUEL USE PER HOME BY STATE (Compare to Table 136 in 2011 RBSA)

State	kBtu per Home						
	Mean	EB	n				
ID	14,845.2	8,310.1	85				
MT	32,977.7	10,439.2	84				
OR	11,565.7	4,919.4	108				
WA	8,271.3	3,351.2	134				
Region	12,226.0	2,601.2	411				

# Table 156. AVERAGE EUI, OTHER FUEL USE (Compare to Table 137 in 2011 RBSA)

State	EUI per Home (kBtu/sq. ft.)					
	Mean	EB	n			
ID	9.9	4.5	85			
MT	21.0	6.6	84			
OR	10.2	5.3	108			
WA	5.5 ▼	2.1	134			
Region	8.9	2.1	411			

#### **Table 157. SUMMARY STATISTICS BY EUI QUARTILES**

		Summary Statistics by EUI Quartile									
Quartile and EUI Range	Conditioned	itioned Area Electric Heat		Heat	Efficient Lighting		Air Conditioning		Electric Hot Water		
	Mean	EB	%	EB	%	EB	%	EB	%	EB	1 11
1 (< 6.33)	1,666.2	41.2	39.8%	3.7%	40.1%	4.7%	60.3%	3.8%	51.4%	4.0%	91
2 (6.33 - 10.07)	1,433.2	25.9	71.2%	3.0%	42.0%	4.5%	79.0%	3.7%	78.3%	3.4%	91
3 (10.07 - 13.73)	1,300.8	35.2	78.9%	3.6%	47.3%	5.0%	80.5%	3.5%	88.8%	2.7%	91
4 (> 13.73)	1,153.7	36.0	83.7%	2.7%	42.9%	4.7%	59.9%	4.0%	85.3%	3.0%	91