



# RESIDENTIAL BUILDING STOCK ASSESSMENT II

Single-Family Homes Report  
2016-2017



*This page intentionally left blank.*

# Table of Contents

<b>Acknowledgements</b>	2
<b>Executive Summary</b>	3
<b>RBSA Overview</b>	8
<b>Sampling</b>	12
<b>Summary of Building Characteristics</b>	16
Age and Type	17
Building Envelope	19
Air Leakage	23
HVAC Systems	25
Lighting	29
Appliances	35
Water End-Uses	39
Electronics	43
Energy Benchmarking	47
Conservation, Purchases, and Miscellaneous Loads	49

# Acknowledgements

*A study of this magnitude requires extensive coordination, thought leadership, and input from numerous organizations. Cadmus would like to thank the following people and organizations for their contributions:*

Anu Teja

Northwest Energy Efficiency Alliance project manager

Anu provided countless hours of strategic guidance and management to Cadmus. Her overall leadership was critical to the success of this project.

Corinne McCarthy

Northwest Energy Efficiency Alliance senior advisor

Corinne’s thought leadership was instrumental in developing innovative ways to communicate the RBSA findings.

Nexant

Recruitment and Scheduling

Nexant’s strategic and persistent effort to recruit and schedule more than 2,000 participants was crucial to the quality and breadth of findings.

RBSA Advisory Groups

The contributions of the RBSA advisory groups were essential to designing and planning another successful RBSA study.

*NEEA is an alliance of more than 140 Northwest utilities and energy efficiency organizations working to accelerate the innovation and adoption of energy-efficient products, services and practices in the Northwest.*

*Many thanks to all of the Northwest utilities that participated in the quarterly meetings, provided billing data, and contributed suggestions throughout the course of the project.*

# Executive Summary

The Northwest Energy Efficiency Alliance (NEEA) completed its second Residential Building Stock Assessment (RBSA) in the fall of 2017. The RBSA is a broad, regional study that characterizes the building stock within three housing types: single-family homes, manufactured homes, and multifamily buildings. This is NEEA’s second residential building stock assessment since its first comprehensive, regionally representative study in the 2011-2012 timeframe. For this study, NEEA continued the work of the first RBSA (referred to as RBSA I in this report) and, wherever possible, data were collected in a similar manner to ensure continuity and comparability between the studies. Cadmus conducted the second RBSA (referred to as RBSA II in this report) and collected data in the 2016-2017 timeframe, with recruiting support from Nexant.

This report presents findings for single-family homes, based on data collected from 1,100 site visits, which includes the core RBSA study (funded by NEEA), as well as data collected for three oversamples funded by Bonneville Power Administration (BPA), Seattle City Light, and Snohomish Public Utility District (PUD). Cadmus developed and applied sampling weights to ensure that all single-family home observations were weighted proportionally to the segment of the population represented by the sample; see Database User Manual for a description of the weighting methods and procedures.

The primary objective of the RBSA is to characterize the existing residential building stock in the Northwest region based on data from a representative sample of homes. NEEA and its partners designed the RBSA to account for regional differences, such as climate, building practices, and fuel choices, by using a large-scale residential sample. The characterization includes the principal characteristics of the homes (e.g., square footage, insulation level, and heating systems), their occupants (e.g., household size and income levels), and their end-use equipment (e.g., lighting, appliances, electronics, and water heating). The sample size chosen for the RBSA II allows benchmarking of energy use within households at sufficient detail to assess the progress of changes in energy efficiency and home characteristics within the region.

The following section presents the study’s key findings by end use or measurement. All values in this section are weighted. These key findings represent notable and statistically significant differences between the RBSA I and RBSA II, and in some cases, the emergence of new or different technologies that were not observed in RBSA I.

## About this Study


## Primary Objective

## Key Findings

Lighting


LED adoption has soared

The data from this study reveal a dramatic shift in the efficiency of residential lighting. LEDs have increased from less than one percent six years ago to nearly a quarter of all installed bulbs, with LEDs found in rooms of every type. The percentage of installed incandescent bulbs greatly declined, while CFLs remained relatively flat.

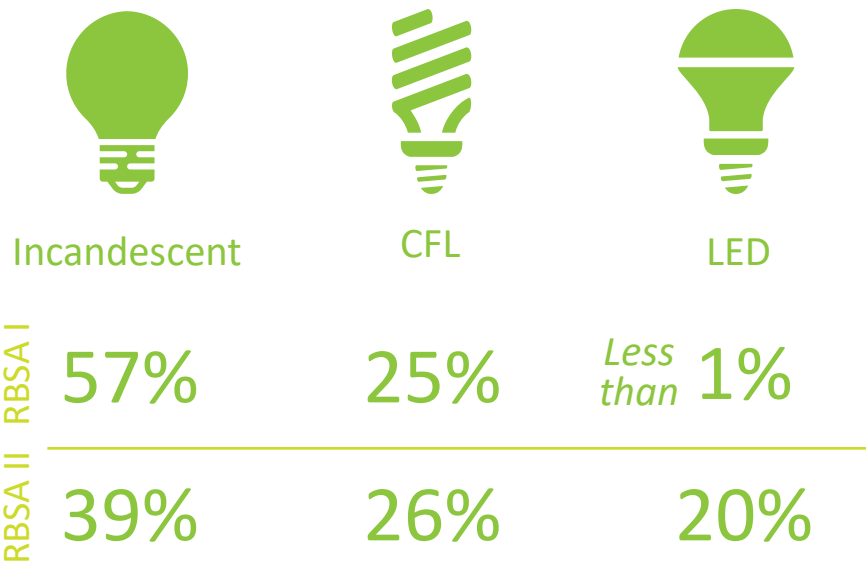

Connected devices have emerged in homes

Though found in only a small percentage of homes, connected lighting products have emerged since RBSA I, largely without program support. Wi-Fi and smart thermostats, which have been rebated through regional programs for several years, were also observed in this RBSA study.

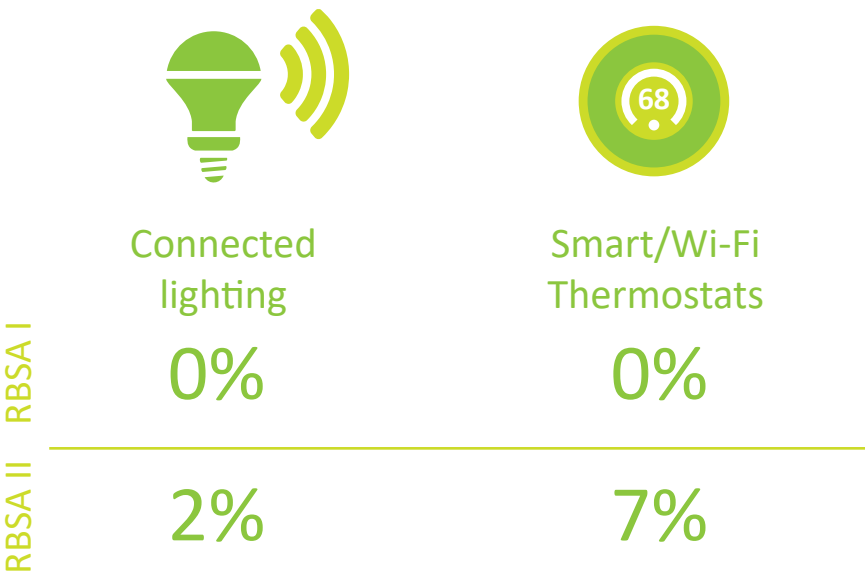


Connected Devices

Fuel


More homes are using gas equipment and appliances

Gas fuel shares for primary heating systems, water heaters, stoves, and ovens have increased, while the share of other fuel types, such as electric, have decreased.

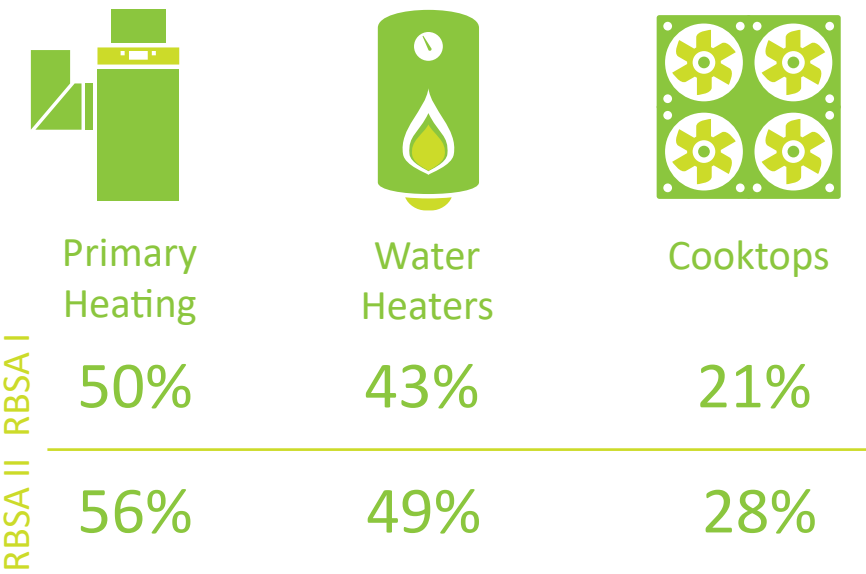

Electric heating and cooling equipment are more efficient

The efficiency of heat pumps and central air conditioners increased relative to the previous RBSA study. Gas furnace efficiencies also increased.

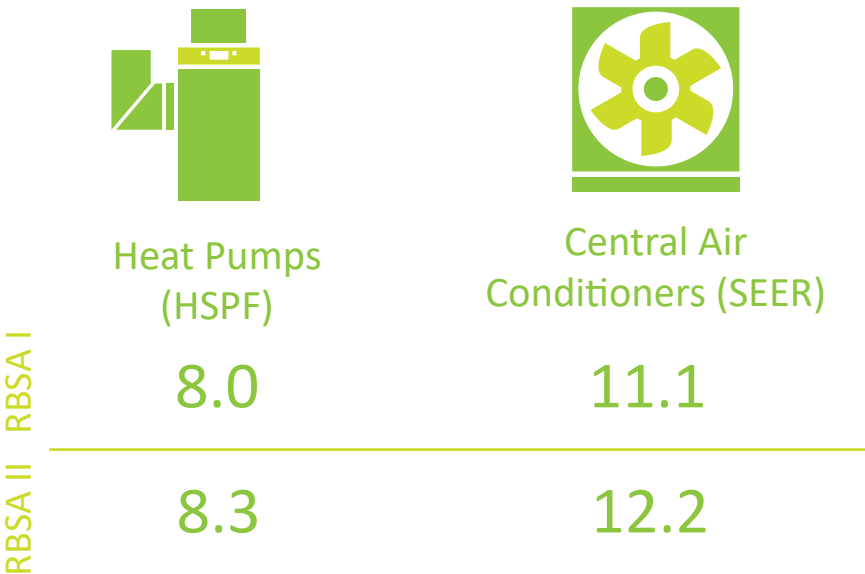


HVAC Efficiency



Mechanically  
Cooled Homes


More Northwest homes include  
mechanical cooling

The percentage of homes using some type of mechanical cooling increased in all three cooling zones. The distribution of cooling equipment did not noticeably change, except for ductless mini-split systems.

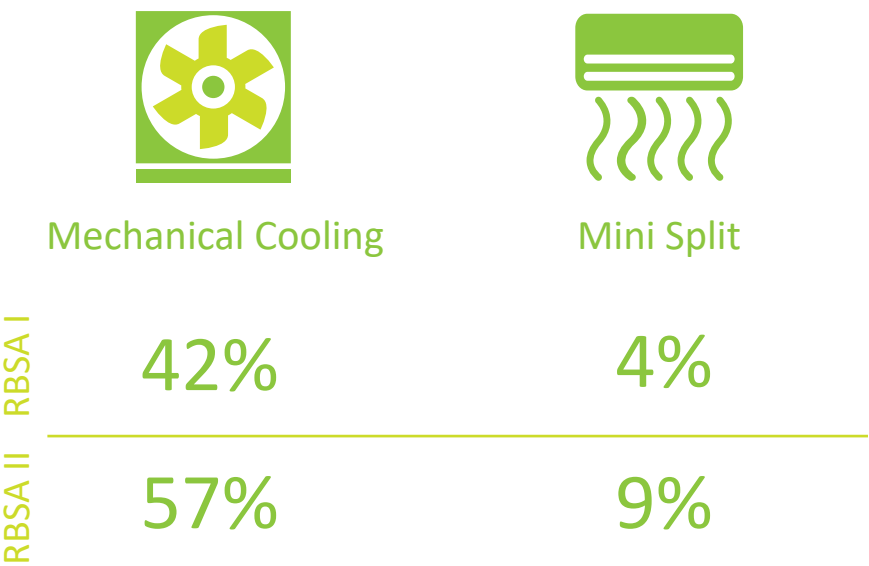


Television technology has shifted

The share of televisions using cathode ray tube designs has plunged since RBSA I, as the older technology gives way to LCD and LED televisions. With the rapid adoption of these more-efficient technologies, there was a large drop in average television power draw.

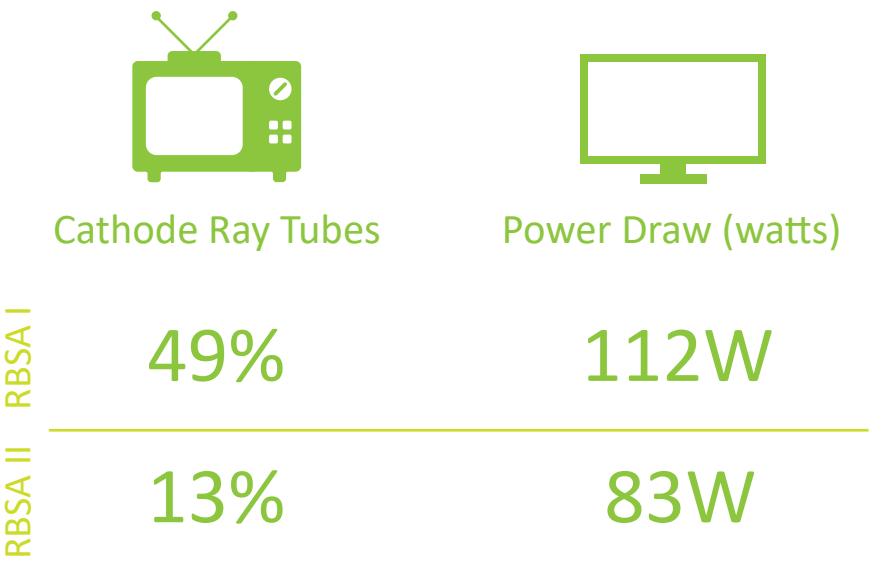


Fewer homes have game consoles and  
set top boxes

Fewer homes had set-top boxes and game consoles than in the previous RBSA, and where present, they were in smaller quantities than previously identified.

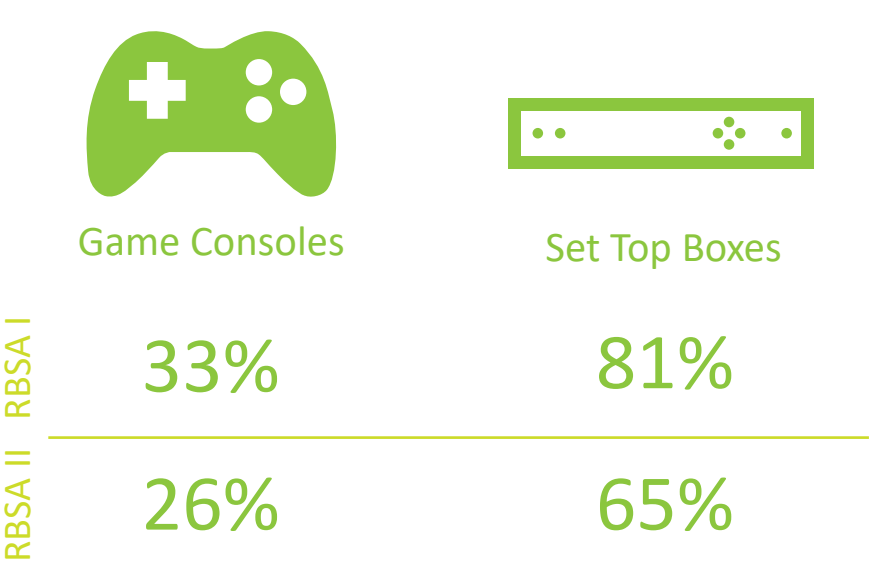

Homes are tighter on average

Blower door testing measured less air leakage for the region on average in this study than the previous study.

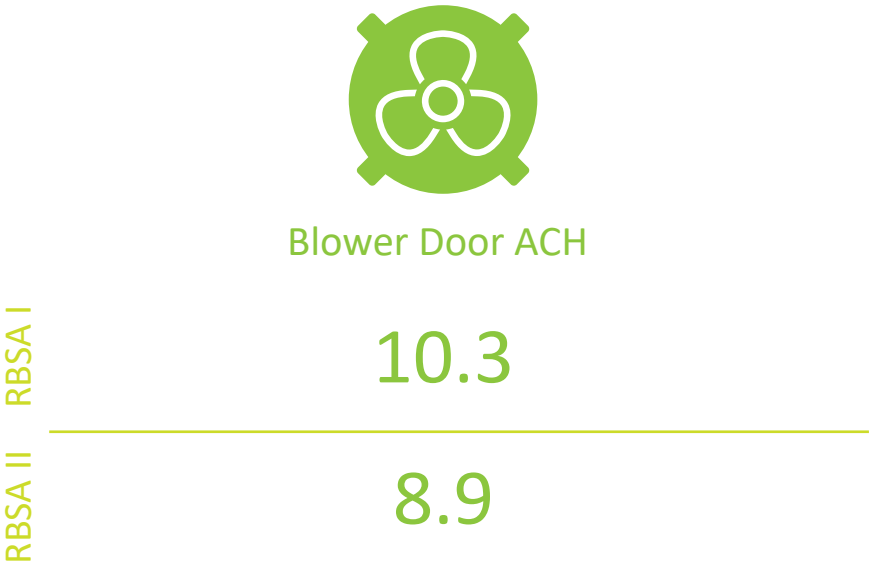

Electronic  
Devices

Home Tightness

*This is NEEA’s second comprehensive single-family building stock assessment.*

*NEEA conducted 10 working group sessions.*

# RBSA Overview

## About this Report

This report includes key findings and themes from the RBSA II, organized by building component and end-use equipment. Each report section provides a high-level summary of data collection protocols, procedures, and findings. Where practical, these sections also highlight key differences between the RBSA II and RBSA I. Cadmus used two-sided t-tests for means and proportions to test the hypotheses that the current RBSA results were equal or not equal to the RBSA I results. We identified metrics where significant changes have occurred over time when tests resulted in p-values of  $p < 0.01$  and this is denoted by either ▲ or ▼ symbol, to indicate whether the value is higher or lower than in the previous study. We did not account for uncertainty of the RBSA I results and treated them as fixed values. Appendix A provides additional detail and supplemental data tables.

To streamline the results, the report includes only a snapshot of the collected and analyzed data. Readers may select the [SEE THE DATA >](#) button (presented throughout the report) to view the detailed tables in the appendix. These tables provide all weighted single-family data from the study, with sample sizes and error bounds. In some instances, Cadmus rounded values to whole numbers for better readability. In these instances, values may not sum exactly to 100%.

The RBSA II database contains additional data, including the full data from the inventory of each home. For more details regarding the database go to [neea.org/data](http://neea.org/data) or [www.NEEA.org](http://www.NEEA.org).

## Facilitation of Working Group Sessions and Production Pretest

The RBSA provides data vital for planning and evaluation at the regional, state, and local utility levels. As such, NEEA engaged regional stakeholders in the study design and planning. Cadmus facilitated 10 working group sessions with NEEA funders and other regional stakeholders, including sessions focused on customer contact, sample design, data collection, and database development.

These sessions provided a mechanism for NEEA, Cadmus, and regional stakeholders to review and provide feedback on the proposed methods and activities planned for the RBSA II. Following the working groups, Cadmus delivered a set of interim protocols documenting the agreed-upon approach for all aspects of the RBSA data collection process such as procedures for customer engagement and interactions, the sample design, and the data points collected as part of the RBSA.

As agreed upon with NEEA, the team pretested the recruiting and data collection protocols developed during the working group sessions to ensure that the processes and tools operated as designed. During the pretest period in February 2016, the Cadmus team identified and recommended a number of small changes to improve the recruitment and data collection processes. Over the course of the study, the team made minor adjustments to the original plan, with most changes aimed at improving the recruitment process.

## Implementing the RBSA II

The RBSA data collection effort included recruiting and surveying participants, acquiring signed billing release forms, and collecting data on observed equipment and home characteristics. Field technicians recorded observed information on nearly every characteristic that impacts the energy consumption of the home—from construction details to the wattage of light bulbs. The field team implemented lessons learned from the previous RBSA to improve data collection and measurements. These differences are called out throughout the report where applicable.

## Customer Survey

Participants completed two short surveys about their home and its occupants: one as a part of a screening and opt-in process and another as part of the site visit. The in-home survey also collected information to help field technicians identify unusual types of equipment they should look for during the site visit such as Wi-Fi enabled equipment, electric vehicles, or seasonal heating and cooling equipment that may be kept in storage.

As the final step of the on-site interview, field technicians recorded the customer’s utility (electric and gas) and utility account information and had the customer electronically sign a billing release form.

## Observed Equipment and Home Characteristics

The RBSA on-site data collection was wide-ranging and, while the data collected varied based on the type of equipment in the home, generally included these observations:

- **Building configuration:** foundation type, number of floors, room square footage, and conditioned area and volume
- **Building envelope (shell):** window characteristics, insulation types and thicknesses, and construction materials
- **Air leakage:** air leakage in cubic feet per minute at 50 pascals, as measured by a blower door test
- **HVAC:** equipment characteristics, nameplate information, location, and TrueFlow® air handler flow testing and pressure measurements for electric central forced air heating systems
- **Domestic hot water:** equipment characteristics, nameplate information, and flow rate measurements for shower heads and faucets
- **Appliances:** equipment characteristics (size and configuration) and nameplate information
- **Electronics:** equipment characteristics and nameplate information
- **Lighting:** type, style, wattage, quantity, control type, and location

A comprehensive list of the types of equipment information field technicians collected by equipment category and home type and specific details for how field technicians collected data and tested home performance can be found at [neea.org/data](http://neea.org/data) or go to [www.NEEA.org](http://www.NEEA.org).

## Observed Equipment



**Field technicians conducted whole-home air leakage and HVAC airflow testing.**

## Home Diagnostic Testing

Through the working groups, Cadmus and NEEA learned that regional stakeholders desired more comprehensive information about whole-home air leakage and HVAC airflow. As such, field technicians performed blower-door testing on all single-family homes in the study sample where they could run the test safely, without detracting from participant satisfaction. They also conducted TrueFlow testing and gathered pressure data for households with an electric central forced-air furnace or heat pump as the primary heating system.

A blower-door test measures the amount of air leakage (or air tightness) of a structure, which is a primary determinant of thermal energy efficiency. Air leakage can also affect occupant comfort, indoor air quality, and building durability. Field technicians conducted a two-point blower-door test, striking a balance between the expediency of single-point testing and the greater reliability and accuracy of multipoint testing.

Where practical, field technicians used the TrueFlow Air Handler Flow Meter to collect data and calculate airflow across air handlers in electric central HVAC systems such as furnaces and heat pumps. Considered with other information, such as the condition of the filter and the type and capacity of the current heating system, this data can help assess the adequacy of the duct system for the current system and/or an air source heat pump.

## Data Cleaning and Building and Equipment Characteristic Analysis

Throughout the field data collection process, Cadmus performed continuous quality assurance (QA) reviews on data collected for randomly selected homes. The QA reviews focused on critical equipment categories, such as lighting and building construction, and emphasized identifying missing, incomplete, or inconsistent data (i.e., building construction attributes that were inconsistent with the other home characteristics). Where applicable, Cadmus updated data points based on data collection notes, photographs, or product lookup and provided feedback to its technicians to improve data collection.

After completing the site visits, Cadmus cleaned and analyzed the data. This process included reviewing the data for outliers, using field notes and photographs to determine whether a change to a data point was required, and correcting data where appropriate. The final data review also included a systematic review of each home and its equipment to ensure internal consistency. For example, Cadmus compared the type of wall framing to the age of home and reported R-value. If there was a discrepancy between these values, the team investigated the issue further and made appropriate changes if required.

The analysis relied on R statistical software to process, compile tables, and apply case weights to estimate population means and proportions as well as their error bounds. Each end-use table and reported statistic includes data on the associated population estimates and their error bounds (calculated at 90% confidence).

## Billing Data Collection and Analysis

Cadmus conducted interviews to capture participant electric and gas billing information such as utility, account number, and meter numbers. Near the end of the field collection phase, Cadmus requested up to 24 months of participant billing data from utilities and reviewed them for completeness and to ensure Cadmus received data for every site, following up directly with utilities for clarification as necessary.

Cadmus performed the following checks to assess the quality of the billing data:

- Reviewed the premise address and accounts for each requested site to ensure they matched those in our database.
- Reviewed the data for inconsistencies such as duplicate reads, multiple readings on the same date, and missing data.
- Reviewed plots of each site's usage data to identify anomalies in the data, such as vacancies or erroneous readings, and removing the consumption data or further investigating the sites as needed.

Cadmus investigated anomalous data and, if possible, corrected the issue. If unable to correct the issue, Cadmus removed the customer from the energy use intensity (EUI) analysis.

The billing analysis relied on a PRISM-type variable-based degree day model. Cadmus used this model to process each home's monthly billing data to produce weather-adjusted annual consumption values. For each household, Cadmus modeled energy usage as a function of heating degree days and cooling degree days, collected from the nearest NOAA weather station. This allowed Cadmus to disaggregate energy into heating, cooling, and baseload components and then apply typical meteorological year (TMY)3 data to these components to derive a normalized annual usage for each household. Finally, to calculate a home's EUI, Cadmus divided the household's normalized usage by the home's conditioned living area.

## Database

Results for the RBSA II are derived from data collected through participant surveys, on-site data collection by trained technicians, and historical energy consumption data furnished by regional utilities. Cadmus cleaned, anonymized, and compiled these data, including a number of calculated fields, into a publicly available database. The database includes data from all three housing types—single-family, multifamily, and manufactured—and is available for download through the NEEA website. The RBSA database is a relational database provided in CSV format. Users can import the flat files into other database software (i.e., Access or SQL) or spreadsheet programs such as Excel.


Cadmus also developed a database user manual and data dictionary. The user manual provides guidance on how to effectively use the database and includes instructions for incorporating sampling weights. The data dictionary defines each field in the database and provides example data for each field to give the end user a better idea of what the data mean and represent.

The database and associated documents are available at [nea.org/data](http://nea.org/data) or go to [www.NEEA.org](http://www.NEEA.org).

**Cadmus collected homeowner billing consumption data to develop an energy use intensity (EUI) for each home.**

**The RBSA II database contains complete data from the inventory of each home.**

# Sampling



## Background

Cadmus designed the single-family home sample to achieve the desired level of confidence and precision (90% confidence with  $\pm 10\%$  precision) for population estimates within each of seven geographic sub-regions. The sampling plan was designed so that these targets and the requisite sample sizes would be met wholly through NEEA project funding. Although NEEA expected some utilities and regional organizations to fund oversamples for their individual service territories, the core sample design accepted by NEEA did not rely on oversamples to meet the desired confidence and precision. This is a key difference between the current study and the previous RBSA; that is, the RBSA I did incorporate an oversample (the BPA oversample) into the core sample design; this study did not.

The following sections describe Cadmus’s approach to developing the sample frame, determining the sample sizes for the core and the oversamples, and estimating population quantities using post-stratification to incorporate data from the core and oversamples.

## Sample Frame Development

The goal of the single-family home sample design was to draw samples that were representative of the population within the following seven geographic sub-regions:

- Idaho
- Western Montana
- Western Oregon
- Eastern Oregon
- Western Washington
- Puget Sound
- Eastern Washington

To ensure that the sample was representative of the target population within each region, Cadmus purchased a randomized address-based sample generated by the U.S. Postal Service (USPS) within each geographic sub-region. Cadmus provided USPS with a list of counties and the number of residences required to reach the sample size targets in each geographic region. After identifying the total number of homes in each zip code that were proportional to the population of homes in the region, Cadmus requested those amounts from USPS. That is, if one county represented 50% of the total regional home population, approximately 50% of the address-based sample would be from that county.

## Core Sample Sizes

Cadmus determined the sample sizes within each geographic sub-region for the core sample. The team calculated the target sample size within each sub-region and then combined them to determine the sample size for the entire region.

Table 1 lists the target and achieved sample sizes for the RBSA II single-family core sample by sub-region.

**Table 1. Target and Achieved Sample Sizes**

Sub-Region	Single-Family Homes	
	Target	Achieved
Western Montana	107	111
Idaho	107	107
Puget Sound	107	111
Western Washington	107	107
Eastern Washington	107	108
Eastern Oregon	107	107
Western Oregon	107	110
<b>Total</b>	<b>749</b>	<b>761</b>

## Utility and BPA Oversample Sample Sizes

Seattle City Light, Snohomish PUD, and BPA requested oversamples in their service territories to include additional single-family homes. The Cadmus team calculated the sample sizes for the oversample using the same equation as used for the core sample, with inputs specific to each utility and BPA. Based on the population of homes served by each utility and BPA, relative to the population in the region, Cadmus predicted the number of homes that would eventually be included in the core sample from each oversample region and reduced the total oversample sample size by that amount. Table 2 shows resulting oversample sample sizes for each utility and BPA.

**Table 2. Utility Oversample Sample Sizes**

Sub-Region	Seattle City Light	Snohomish County PUD	BPA
Western Montana/ Idaho			32
Puget Sound	139	31	49
Western Washington			10
Eastern Washington/ Eastern Oregon			18
Western Oregon			60
<b>Totals</b>	<b>139</b>	<b>31</b>	<b>169</b>

*The goal of the single-family home sample design was to draw samples that were representative of the population within seven sub-regions.*



Sampling Weights

Cadmus used stratified sampling to select households for the core sample where strata were defined by geographic sub-regions. Cadmus calculated and applied sampling weights to estimate the overall population quantities and ensure that observations are weighted in proportion to the population represented by the sample. The oversamples introduced additional sampling within each core stratum and, thereby, the need for an adjustment to the core stratified sampling weights to account for sample size increases in the oversampled territories.

Cadmus used post-stratification to account for the combination of stratified sampling in the core and the additional sampling in the oversamples. To post-stratify, Cadmus divided the Puget Sound sub-region into BPA, Snohomish PUD, and Seattle City Light territories and divided the other sub-regions into BPA and non-BPA territories. Cadmus determined the population sizes in each post-stratification stratum based on home data from the 2014 American Community Survey (ACS) and achieved sample sizes.

The Cadmus team mapped home population sizes from the ACS data to the zip codes in each sub-region and service territory to determine stratum population sizes and counted the achieved sample sizes in each stratum. The team applied sampling weights to all observations within each stratum to estimate population totals, means, and proportions.



Table 3 lists the post-stratification strata within each sub-region.

Table 3. Post-Stratification by Sub-Region

Sub-Region	Post-Stratification Strata
Western Montana	• Bonneville Power
	• Non-Bonneville
Idaho	• Bonneville Power
	• Non-Bonneville
Eastern Washington	• Bonneville Power
	• Non-Bonneville
Western Washington	• Bonneville Power
	• Non-Bonneville
Puget Sound	• Bonneville Power
	• Snohomish PUD
	• Seattle City Light
	• Non-Bonneville
Eastern Oregon	• Bonneville Power
	• Non-Bonneville
Western Oregon	• Bonneville Power
	• Non-Bonneville

The following maps show the distribution of single-family site visits across Idaho, Western Montana, Oregon, and Washington by NEEA’s core RBSA II sample, as well as utility and BPA oversample homes. The maps also show a more detailed breakout of site visits for these areas: Puget Sound, Portland, Eugene, and Spokane.

- Utility Oversample
- BPA Oversample
- NEEA Core

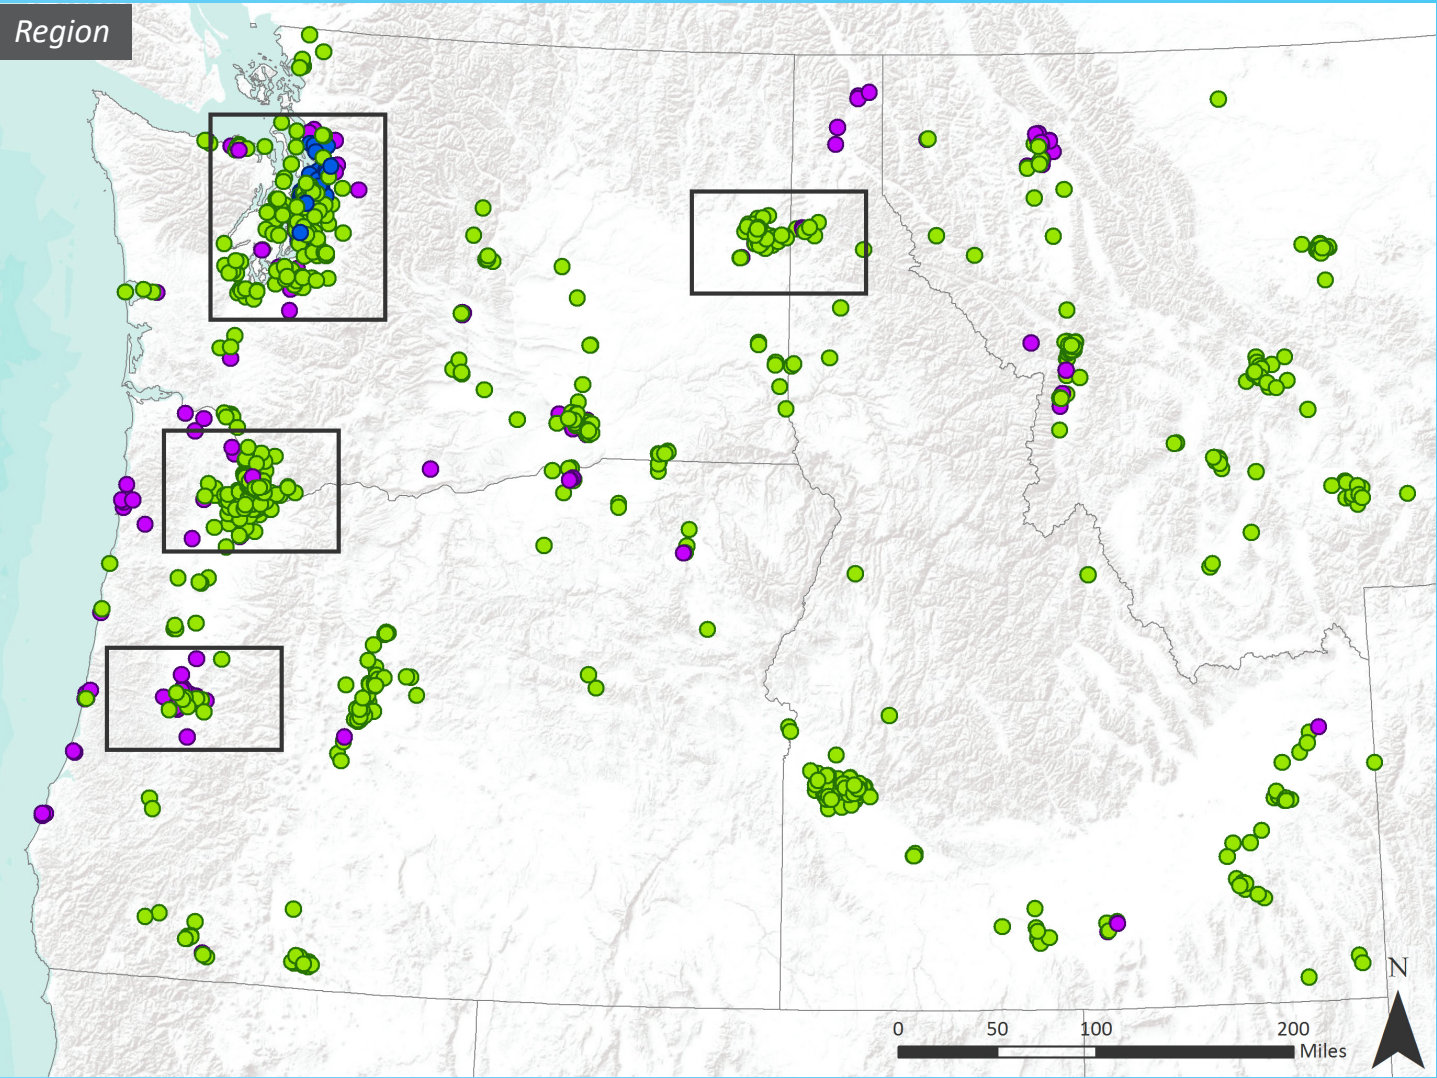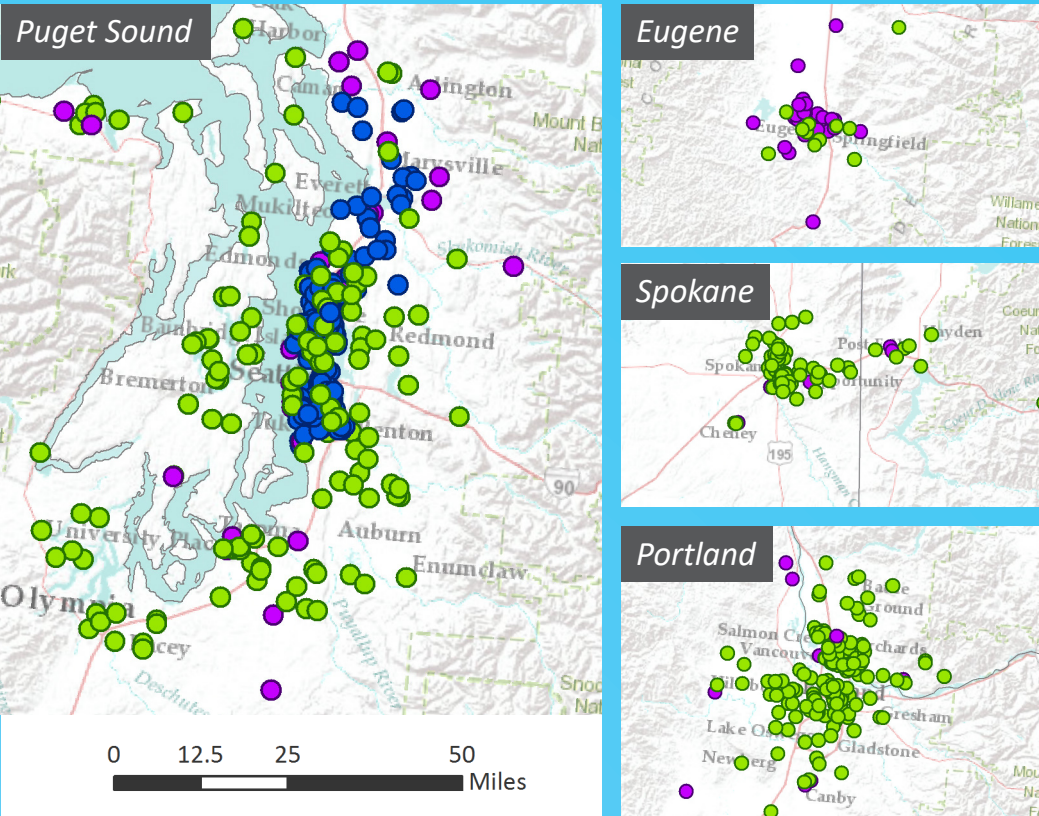



# SUMMARY OF BUILDING CHARACTERISTICS

*This page intentionally left blank.*

The following sections provide detailed findings by home characteristic, measurement, and end use. All values in these sections are weighted. These findings represent notable and statistically significant differences between the RBSA II and the previous RBSA, and in some situations, the emergence of new or different technologies not observed in RBSA I.

Where practical, these sections also highlight key differences between the RBSA II and RBSA I. Differences that are statistically significant are denoted by either an ▲ or ▼ symbol, to indicate whether the value is higher or lower than in the previous study. Where Cadmus observed new or different technologies, or if we developed tables for this RBSA that were not present in the RBSA I, we did not conduct statistical significance testing.

Appendix A provides additional detail and supplemental data tables, as well as references to comparable RBSA I table numbers.





Description

Age and Type

The RBSA II defined single-family homes according to the Northwest Power and Conservation Council’s definition: individual residences in buildings with fewer than five residential units in a single structure. Single-family building types include detached single-family, townhouse or rowhouse, duplex, triplex, and fourplex.


A detached single-family home does not share a common wall with an adjacent unit or structure. A townhouse or rowhouse abuts one or more buildings, does not sit even partially above or below a separate living unit, and rests on land owned by the owner of the home. A duplex, triplex, and fourplex may include shared floors or ceilings. When Cadmus recruited one unit within a duplex, triplex, or fourplex, field technicians only recorded information for the recruited unit.

Cadmus identified the age of the home first by asking the participant and then verifying through online sources.

Key findings for home type and vintage include:

- Consistent with the previous RBSA, just under a quarter of the sample comprises homes built prior to 1951 that have only undergone modest additions in subsequent decades.
- Two decades stand out where new housing stock spiked (1970s and early 2000s), and these spikes are consistent for all states. The spikes are most pronounced in Idaho and Montana, with Idaho experiencing the largest housing stock increases across the region per decade . There is a noticeable decline in new housing stock after 2010, but these data represent only seven years.
- Cadmus conducted 87% of RBSA II site visits in single-family detached homes, which is a 6% decline from the previous RBSA. There was an increase in site visits to duplex, triplex, and fourplex homes for all states and decreased site visits to town and rowhomes in Idaho.
- Cadmus compared collected building stock data with applicable home characteristics from the American Community Survey (ACS) to ensure that the study results were representative of the population reported in the ACS. Both housing vintage and type were similar.


Distribution of Homes by Vintage and State

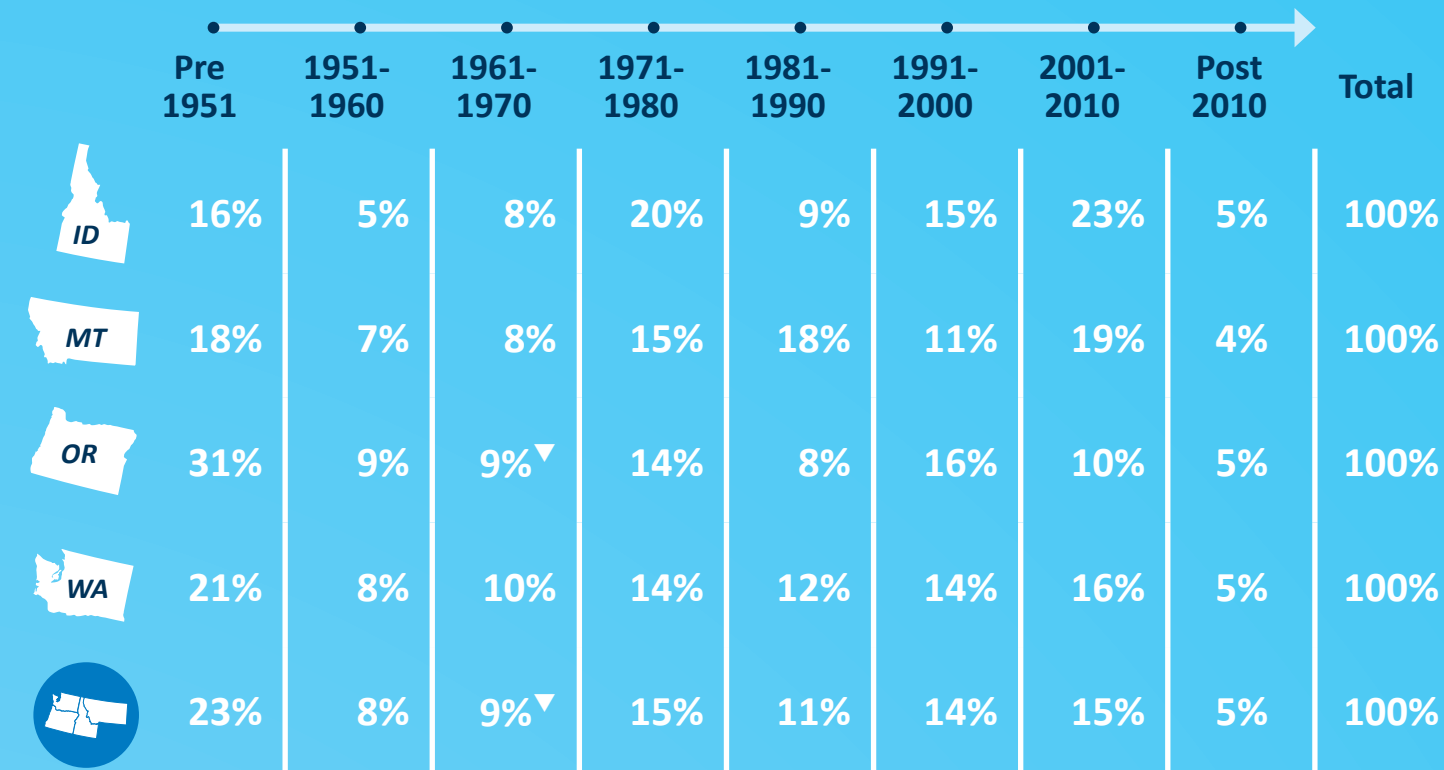

SEE THE DATA ➔

Key Findings

Distribution of Homes by Type and State

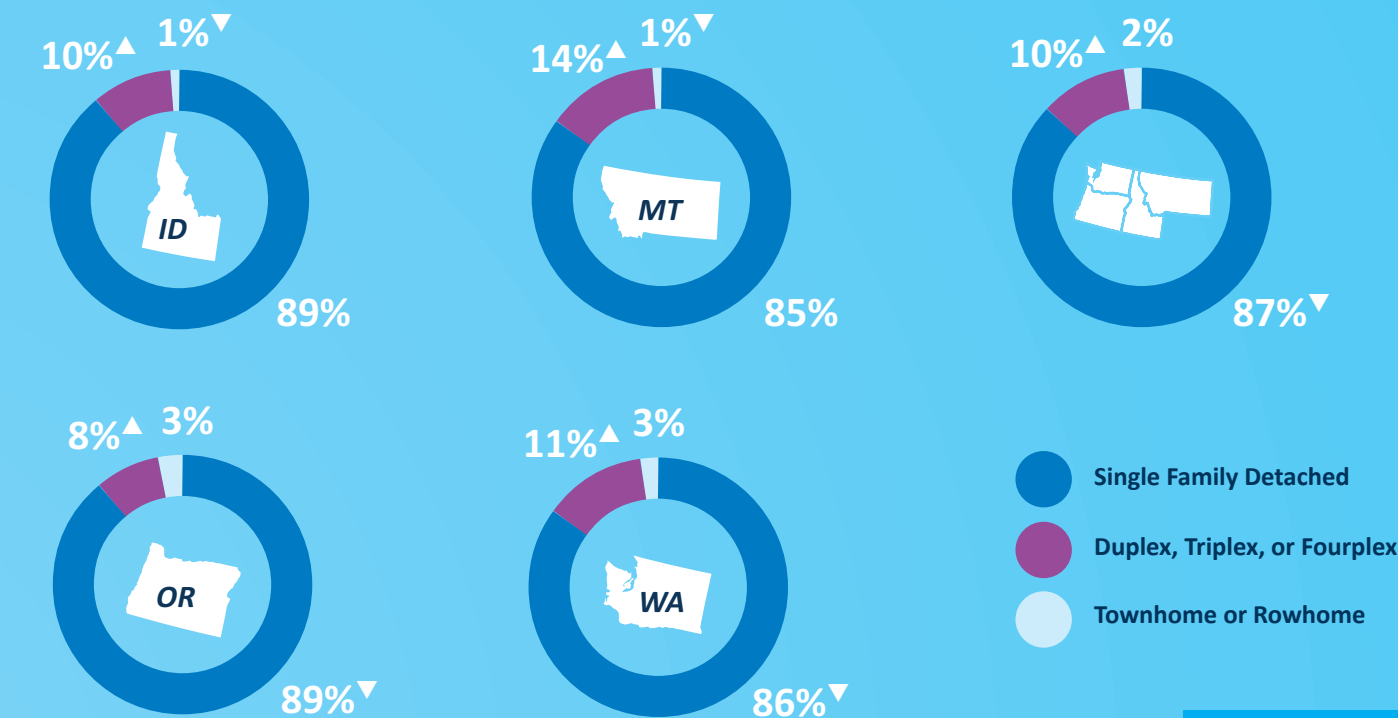

SEE THE DATA ➔

▲ ▼ Statistically different from 2011 RBSA



Description

# Building Envelope

The building envelope comprises the surfaces and insulation that separate conditioned space from the outdoors and is a key determinant of the energy use of any building. Field data collection for single-family homes included extensive characterization of the building envelope, including ceilings, walls, floors, and windows and doors.

Field technicians captured information about exterior surfaces using a variety of techniques. In accessible attics, crawlspaces, and basements, direct observation allowed collection of insulation type and thickness along with other relevant characteristics. With exterior walls, which are typically fully enclosed, field technicians used a combination of infrared thermography and probing around electrical boxes to determine whether a surface was insulated. Probing also often allowed an estimate of the thickness of wall insulation.


Unless otherwise noted, R-values represent only the R-value of the insulation, not of the wall, attic, or floor assembly as a whole.

Key findings for home building envelope include:

- More Northwest homes have attic insulation with R-values greater than 40 in the RBSA II than in RBSA I. However, the RBSA II weighted data show room for improvement—30% of homes have attic insulation with a weighted average R-value less than 11. The lower R-values in RBSA II versus the RBSA I likely reflect differences in methodology. The RBSA II collected data on type, thickness, and completeness of insulation in each attic space rather than estimation of an R-value. The team used these insulation characteristics to calculate a weighted average U-factor and then the R-value.
- The RBSA II data show improvement in wall insulation in Washington, with fewer homes with no wall insulation. Again, the overall shift to lower R-values throughout the region is likely because of differences in methodology. Infrared thermography in the RBSA II study may have allowed more accurate identification of insulated and uninsulated walls, and estimation of the completeness of wall insulation. As with attic insulation, the team used this information to calculate a weighted average U-factor and weighted R-value for the home.

## Distribution of Attic Insulation R-Value


Attic insulation data show room for improvement, with **30%** of single-family homes in the Northwest having weighted average R-values **less than 11**.

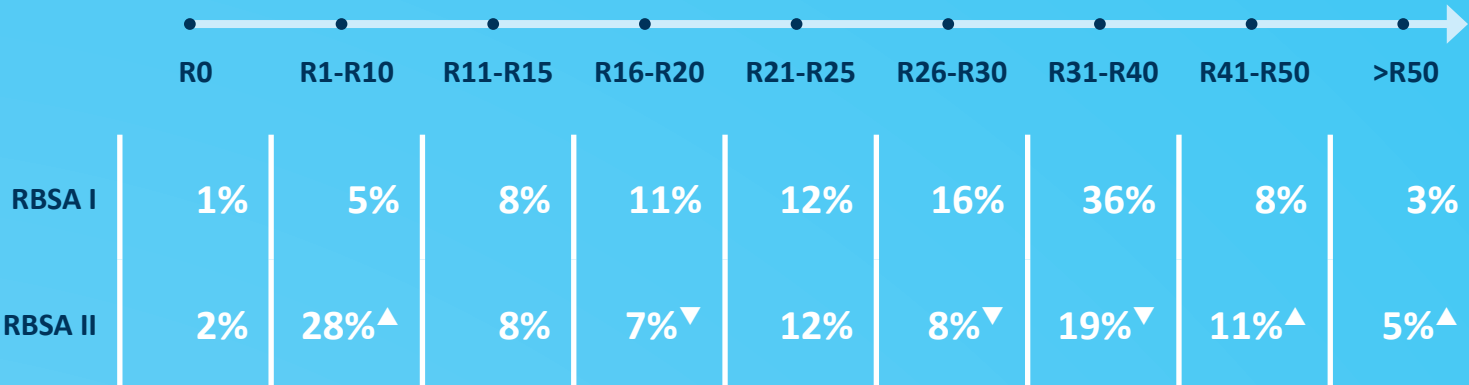

SEE THE DATA ➔

## Distribution of Wall Insulation R-Value by State


Nearly **10% of homes** in the region have no wall insulation, and another **22% have a weighted average R-value less than R-11** (usually because only some walls have insulation).

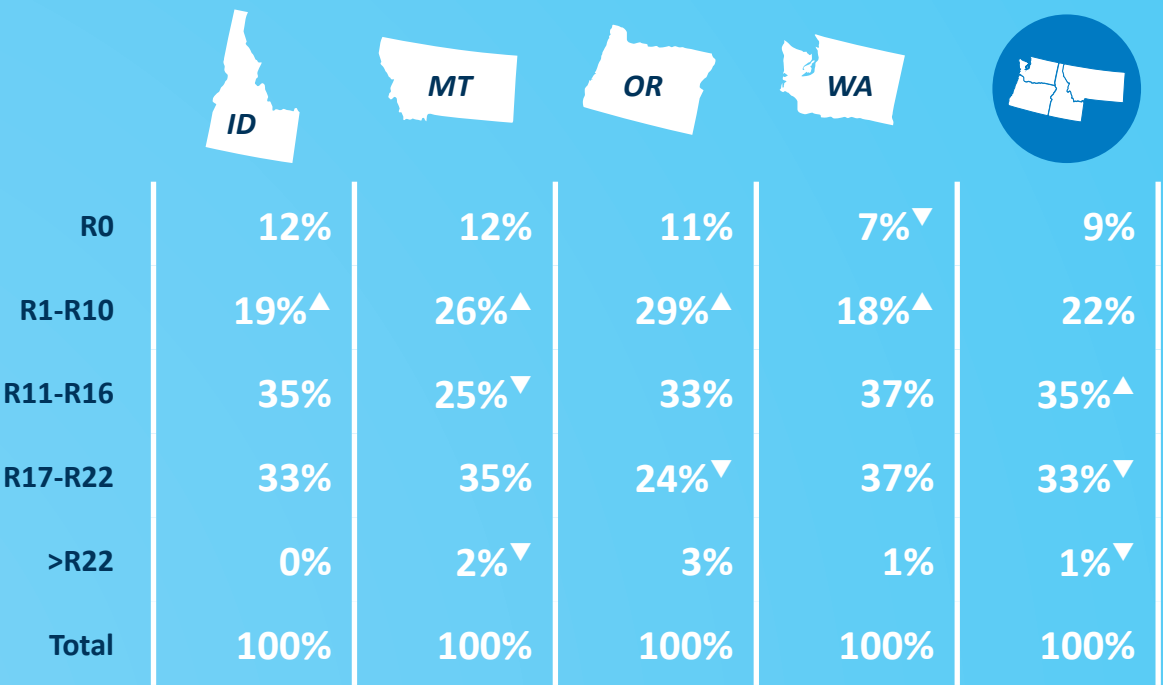

SEE THE DATA ➔

▲ ▼ Statistically different from 2011 RBSA



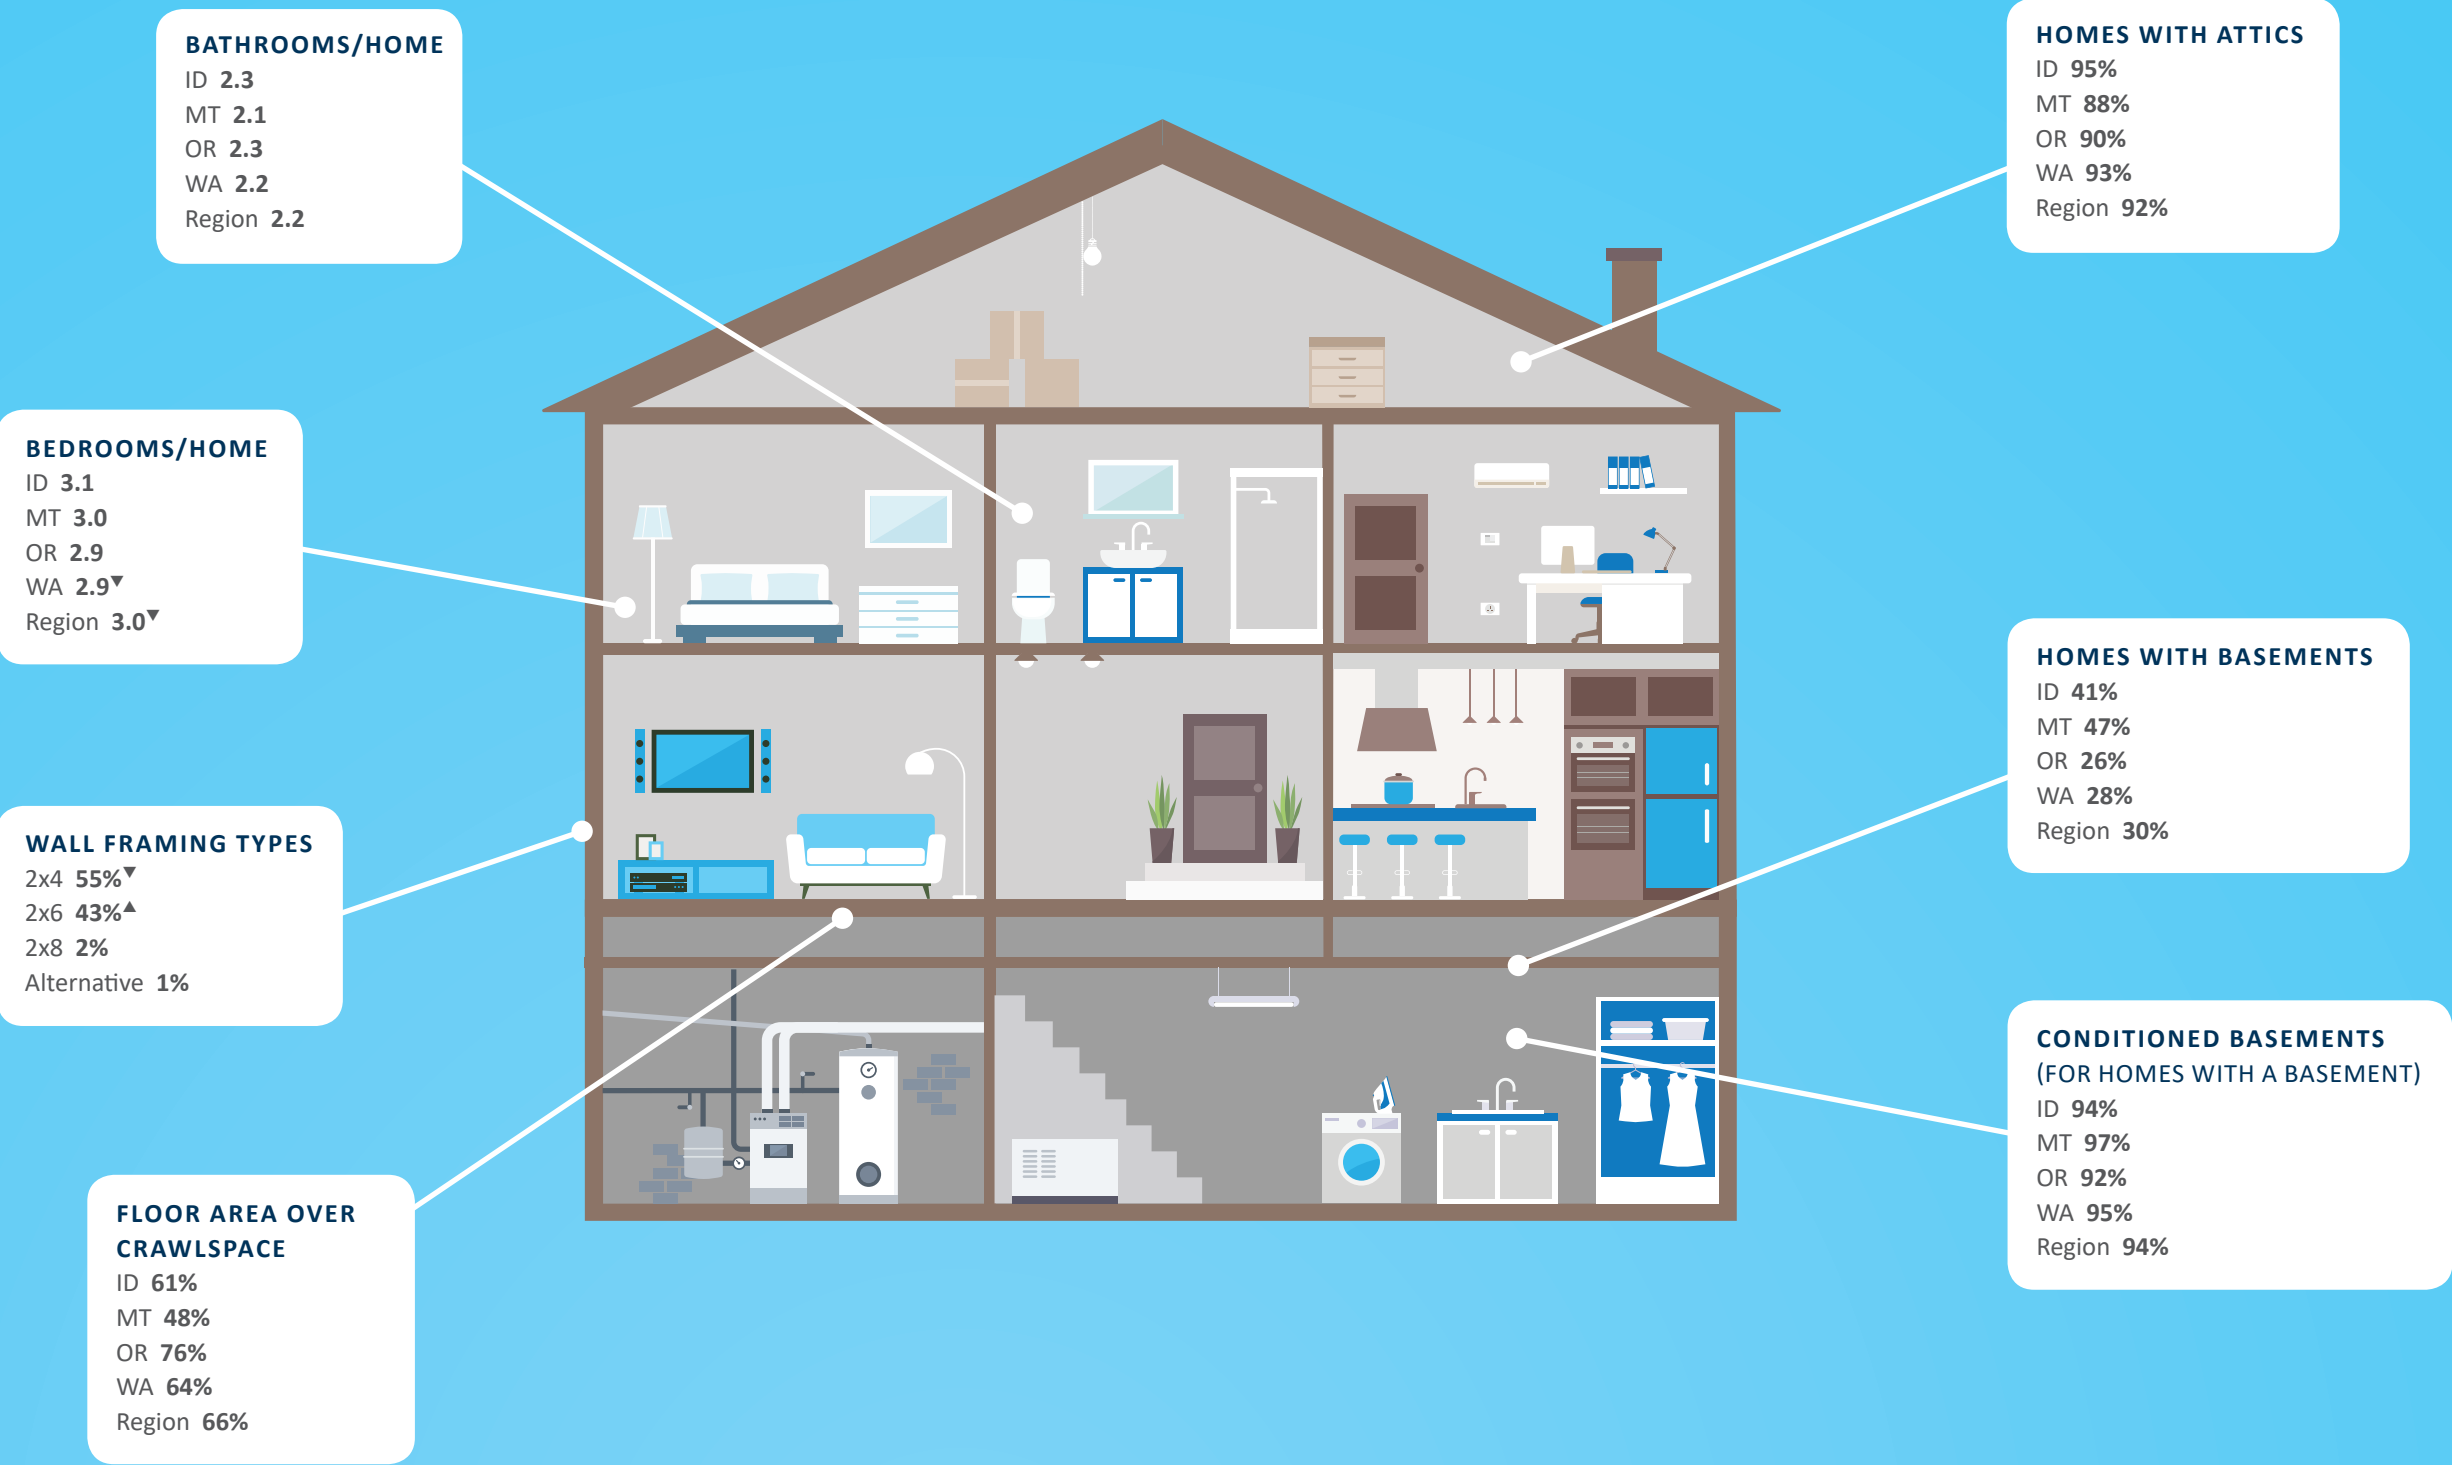

▲ ▼ Statistically different from 2011 RBSA

▲ ▼ Statistically different from 2011 RBSA



Description

Air Leakage

High air leakage in homes squanders energy as conditioned air leaks to outside. It can also lead to occupant discomfort and to moisture-related problems caused by condensation as warm air from inside meets cold surfaces inside walls, attics, or crawlspaces. Where safety protocols allowed, field technicians conducted a blower door test on homes to provide a measure of air leakage.

As prescribed by study protocols, field technicians used a two-point process for conducting the blower door tests, meaning results were measured at two house pressures—roughly 25 pascals and 50 pascals. These data allowed calculation of two commonly used indications of the air tightness of a building: air leakage in cubic feet per minute (CFM) at 50 pascals—denoted CFM50—and air changes per hour at 50 pascals, which is commonly denoted as ACH50. A two-point blower door test allows calculation of an approximation of the slope of the flow curve for each site, which must be assumed when testing at a single pressure. This increased the accuracy of results and allowed a level of quality assurance during testing.

For sites that met eligibility criteria and where practical, visits included a test of airflow across the air handler using the Energy Conservatory’s TrueFlow Air Handler Flow Meter. Eligibility requirements included that the primary heating system use electricity as the heat source and that the system configuration allowed a TrueFlow plate to be placed at or near the air handler.


Key findings for homes air tightness include:

- The RBSA II blower door data show less air leakage on average than the previous RBSA homes in Montana, Washington, and the region. The RBSA II weighted regional average of 8.9 ACH50 represents 87% of the RBSA I average. This reduction is likely, in part, from home improvements such as air sealing, installation of high-efficiency sealed combustion furnaces, and window replacement. The addition of new, tighter homes to the housing stock since the previous RBSA also accounts for reduced average air leakage.
- Consistent with RBSA I findings, RBSA II blower door data show higher ACH50 for homes in Oregon and Washington than Idaho and Montana, indicating more air leakage on average in those homes. As expected, air leakage is higher on average with older homes, with average ACH50 ranging from 4.9 for homes built after 2010 to 13.0 for homes built before 1951.
- During TrueFlow air-handler airflow testing, air source heat pumps averaged 280 CFM per ton of heating capacity across the region, and electric forced air furnaces averaged 185. The report Appendix A includes summary tables of TrueFlow results. The RBSA II database shows results for each home, along with other relevant information.

Key Findings

Blower Door Air Tightness (ACH50) by State


RBSA II blower door testing showed **less air leakage on average than the previous RBSA.**

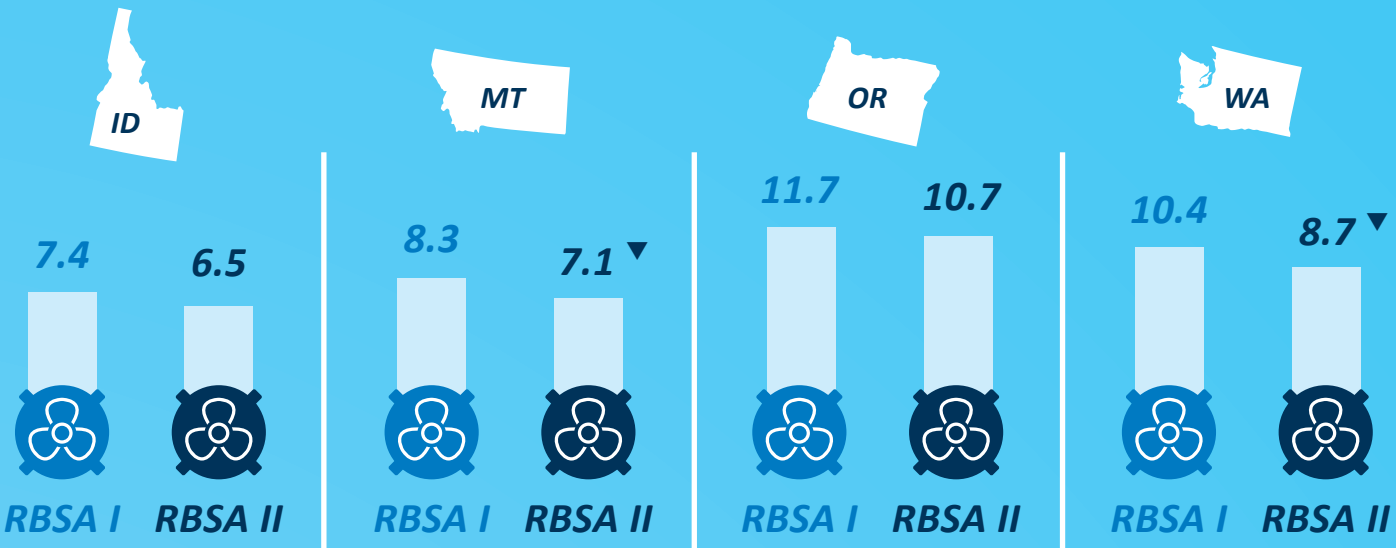

SEE THE DATA

Blower Door Air Tightness (ACH50) by Home Vintage

Air leakage is **higher on average with older homes.**

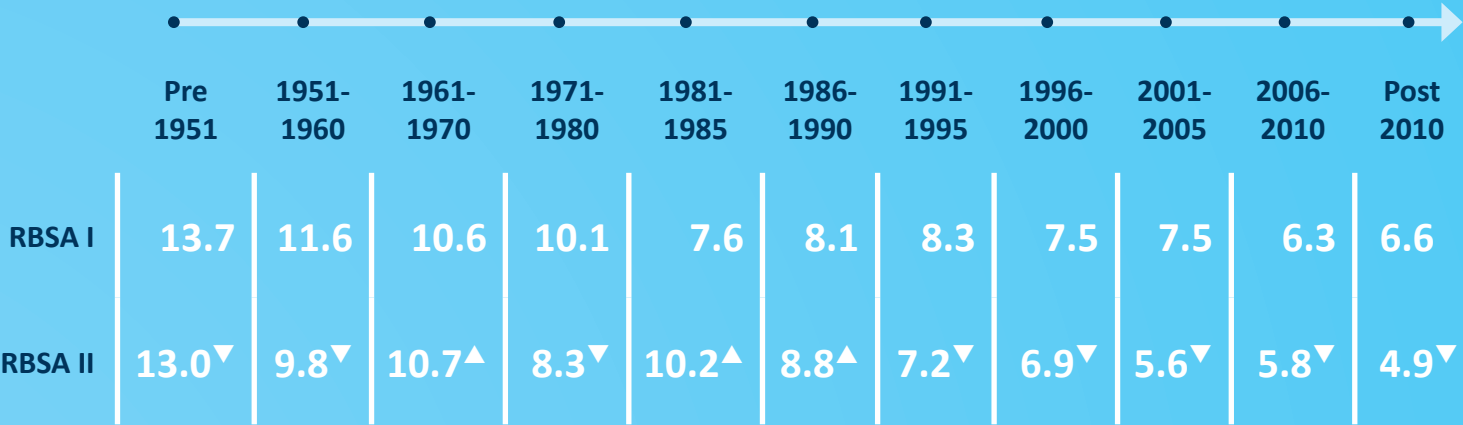

SEE THE DATA

▲ ▼ Statistically different from 2011 RBSA



Description

# HVAC Systems

Data collection included extensive characterization of the heating, cooling, and ventilation equipment in each home. These systems include central equipment such as forced-air furnaces and heat pumps as well as zonal equipment such as baseboard heaters, heating stoves, and ductless mini-split heat pumps. Field technicians also collected information such as the make, model number, capacity, and year of manufacture of heating and cooling equipment where practical. Where year of manufacture was not included on the manufacturer’s label, technicians collected serial number data, which often included encoding that allowed the team to determine the year of manufacture after the site visit. Where practical, Cadmus also used post-visit lookups to provide equipment efficiency ratings.

During the working group process, Cadmus collaborated with stakeholders to refine the data collection methods of the RBSA I. One improvement to the data collection, which is reflected in some of the results below, was increased focus on portable and seasonal heating and cooling devices. The field technicians asked residents whether they used these equipment at any point during the year, even if the equipment was stored during the site visit, and they captured relevant information about this equipment if applicable.


Changes in federal efficiency standards since the last RBSA mandate higher minimum efficiency ratings for some HVAC equipment. For instance, as of May 1, 2013, the minimum annual fuel utilization efficiency (AFUE) of non-weatherized gas furnaces for stick-built homes increased from 78 to 80. As of January 1, 2015, the minimum seasonal energy efficiency ratio (SEER) of split system heat pumps increased from 13 to 14, and the minimum heating seasonal performance factor (HSPF) increased from 7.7 to 8.2.

Key findings for HVAC include:

- Primary heating equipment remained much the same in RBSA II as in the previous RBSA, with two notable changes. First, use of heating stoves and fireplaces as the primary heating system decreased from 14% to 8%, and second, use of mini-split heat pumps increased from 1% to 4%.
- For electrically heated homes, the percentage of households using mini-split heat pumps as their primary heat source increased from 5% in RBSA I to 12% in RBSA II.
- The percentage of homes using some type of mechanical cooling increased from 42% to 57%. An increase in the use or identification of portable air conditioners, packaged air conditioners (window units), and ductless heat pumps appears to account for this difference.


## Distribution of Primary Heating Systems

Distribution of primary heating and cooling systems was similar to the previous RBSA. The only notable changes included a **decrease in heating stoves and fireplaces** for primary heat and an increase in mini-split heat pumps.

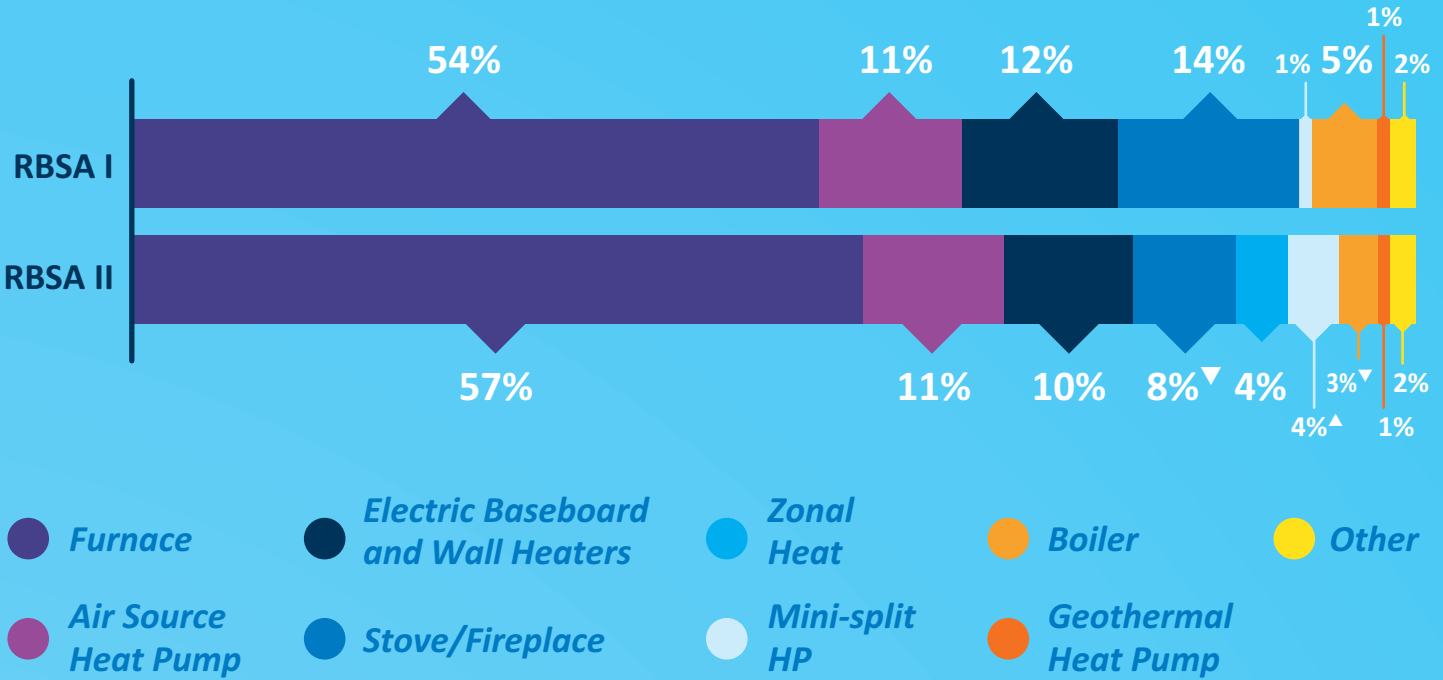

SEE THE DATA >

## Distribution of Primary Cooling Systems

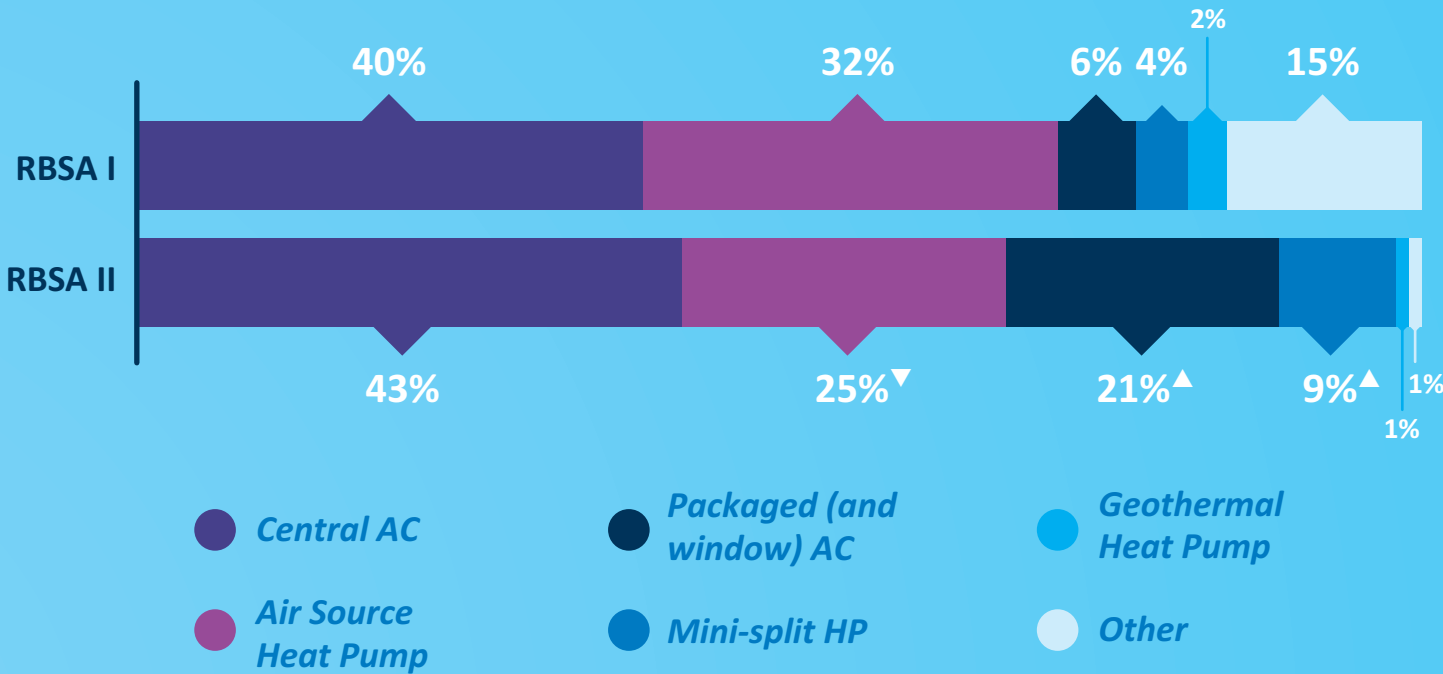


SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA

Distribution of Primary Heating Fuel Type by State


Gas fuel **increased from 49% to 56%**. Other alternative fuel sources declined.

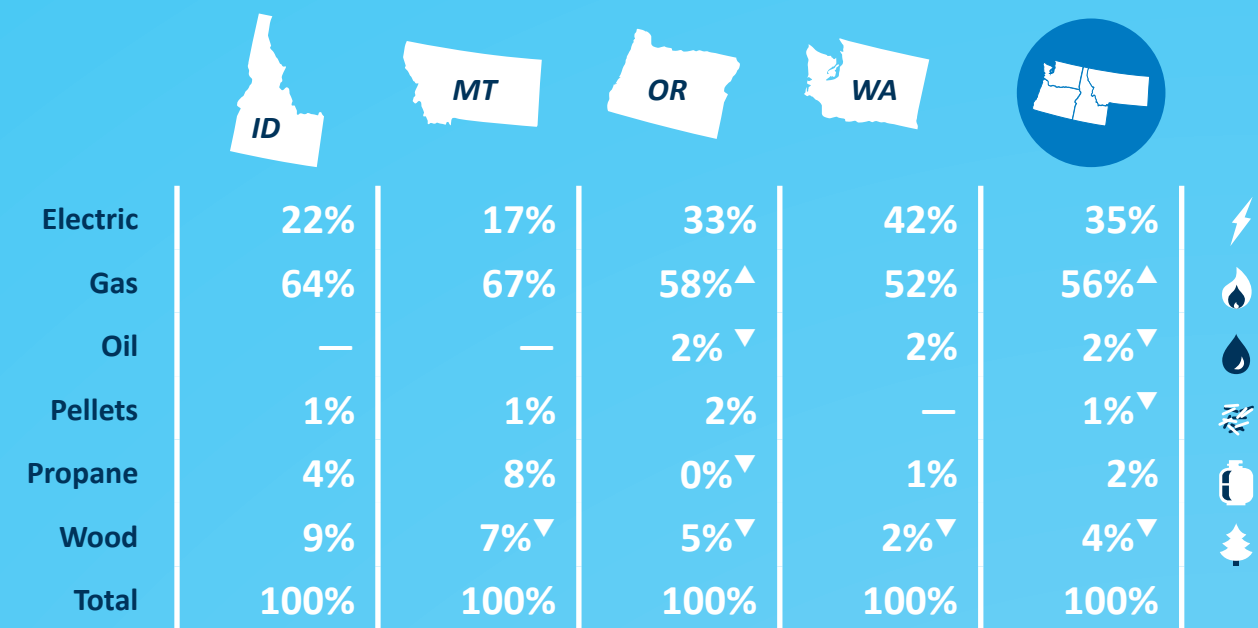

SEE THE DATA >

Average Heating and Cooling Equipment Efficiency Ratings


Heating and cooling equipment are **trending toward greater efficiency**.

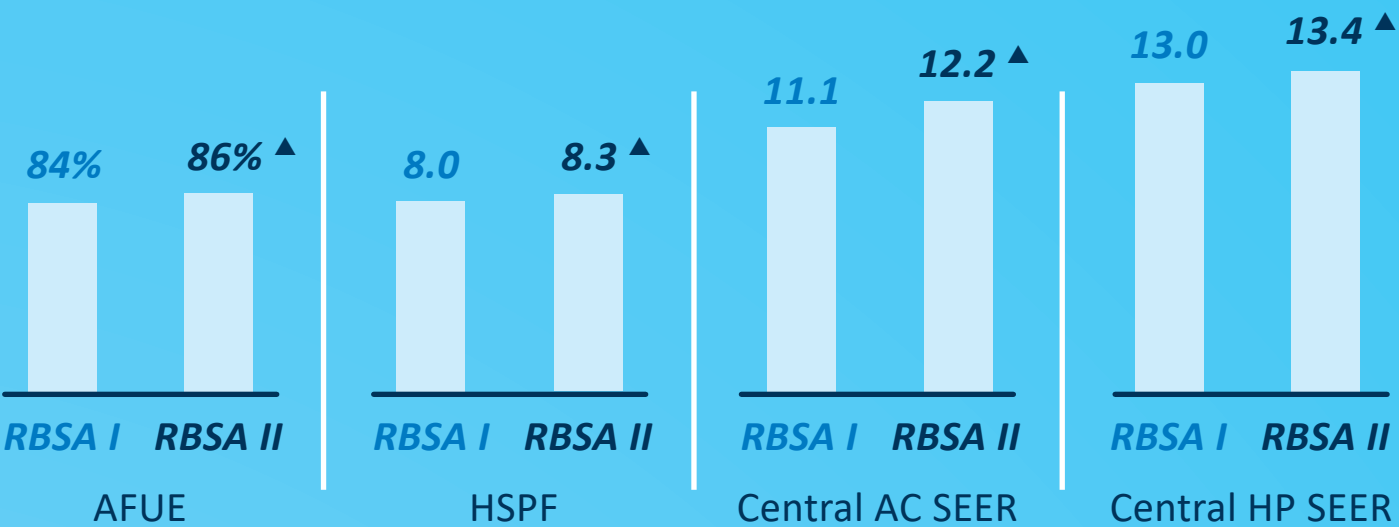

SEE THE DATA >

Percent of Homes with Cooling Equipment (All Systems and Cooling Zones)


More homeowners are mechanically cooling their homes.

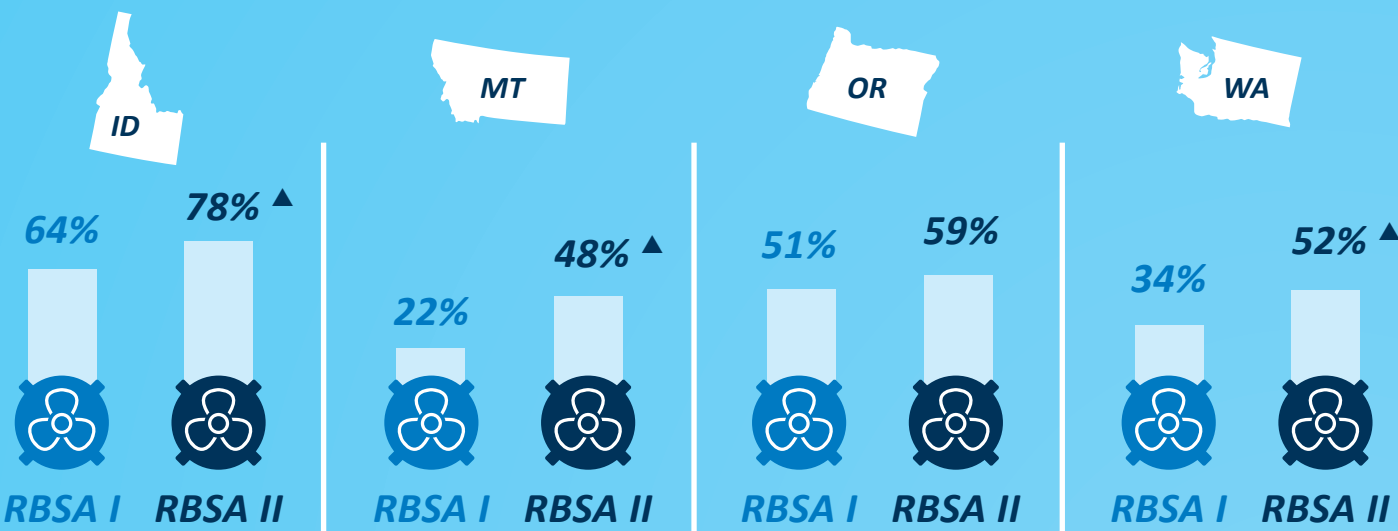

SEE THE DATA >

Distribution of Thermostats by Type

Connected thermostats now represent **7% of installed thermostats**.

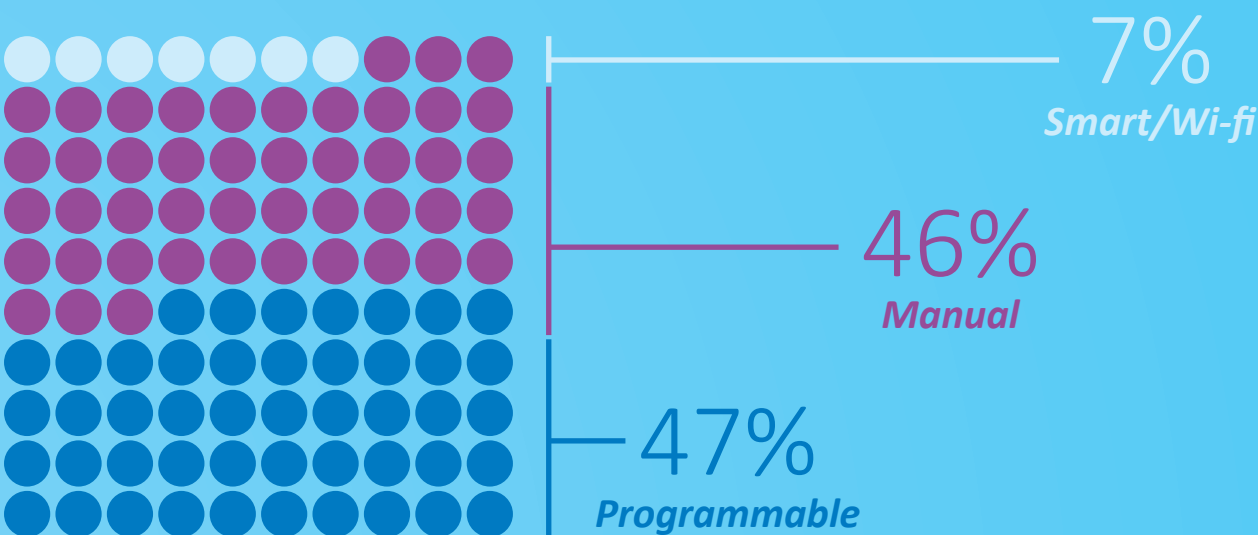

SEE THE DATA >



Description

Lighting

Lighting data collection is a highly involved process, encompassing lighting inside and outside the residence as well as equipment kept in storage. Cadmus conducted a comprehensive lighting walk-through that captured details about lighting in every room accessible to the field technician. These details include lamp type, style, wattage, quantity, control, and location. In addition to bulbs currently installed, field technicians identified and recorded bulbs in storage.

To ensure all relevant data were collected, field technicians performed a systematic walk-through of the home, documenting control types, fixtures, lamp attributes, and quantities. They began the process by asking the resident about spare bulbs and recording bulb type and quantities. Identifying the type of bulb can be difficult due to accessibility or safety issues and the fact that many bulbs today look like incandescent but are in fact something different, such as a halogen. Where field technicians could not accurately assess the bulb type, they noted it as unknown.

Collecting information about LEDs and connected lighting, or lighting with an element of connectivity or intelligence, was new to this RBSA.


The Energy Independence and Security Act of 2007 was phased in beginning in 2012. This standard impacted many lamps that would have been targets of utility lighting programs and likely accelerated the adoption of energy efficient light bulbs.

Key findings for homes lighting include:

- Regional lighting stock changed dramatically since the RBSA I. Most notably, LEDs represent a significant share of installed bulbs (20% regionally). This is a substantial increase from the RBSA I, where LEDs were not found in sufficient quantities to be included in report tables.
- The percentage of incandescent lamps in use across the region decreased from 57% to 39%. Other bulb types such as CFLs and halogens remained about the same, with insignificant changes in proportional share.
- Connected lighting, bulbs that connect to the home Wi-Fi, were found in 2% of homes.

Average Distribution of Lamp Type by RBSA Study


Almost half (46%) of all light bulbs are now either a CFL or LED compared to just 25% (all CFLs) in the RBSA I study.

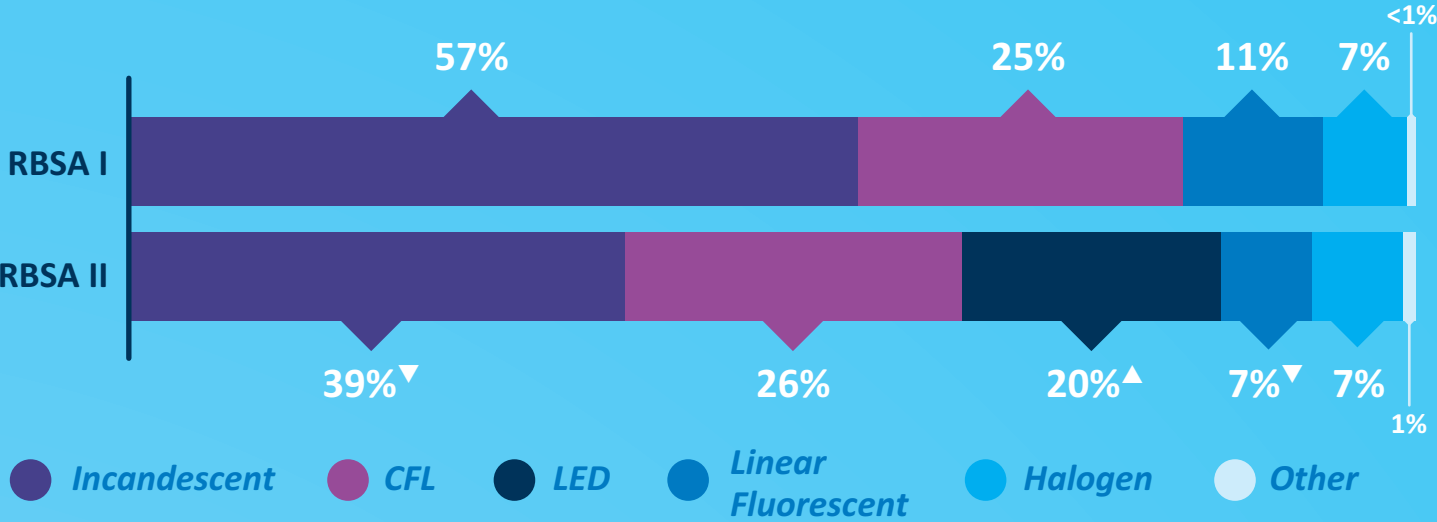

SEE THE DATA

Distribution of Lamp Type by State

The proportion of installed LED lamps ranged from 9% in Montana to 24% in Washington.

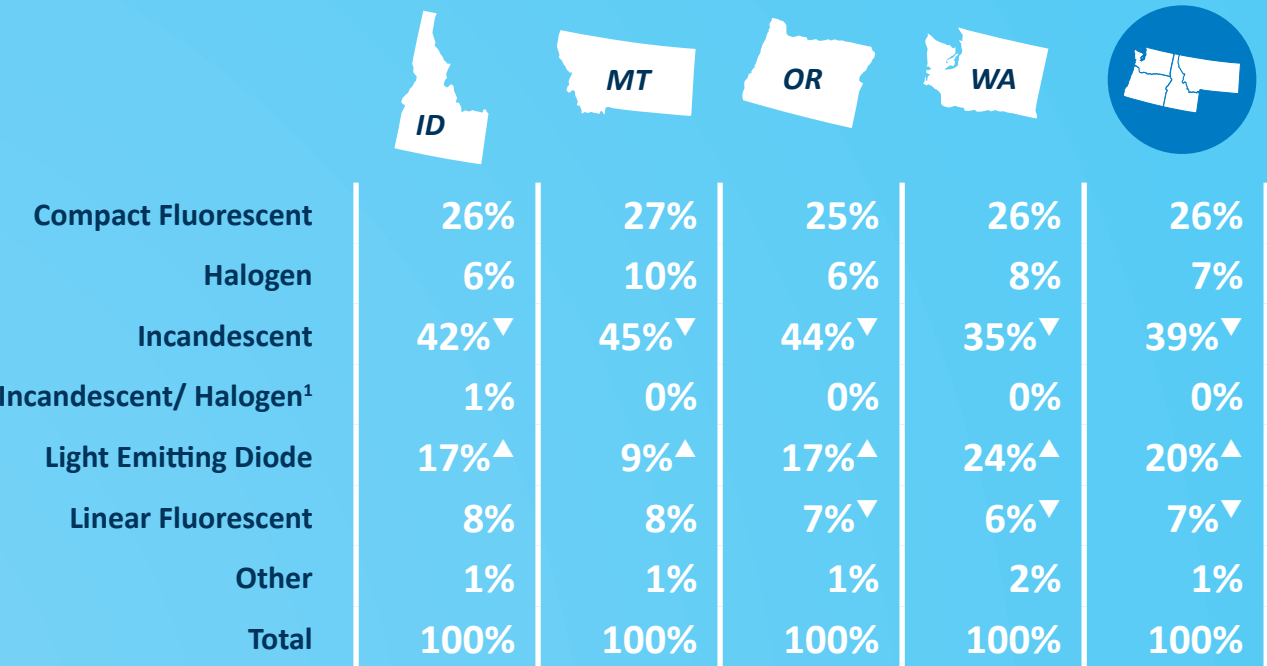

<sup>1</sup>In some instances, field technicians could not differentiate between incandescent or halogen.


▲ ▼ Statistically different from 2011 RBSA

SEE THE DATA




LEDs are installed *throughout the home*.

The *highest concentration of LEDs is in the kitchen*.

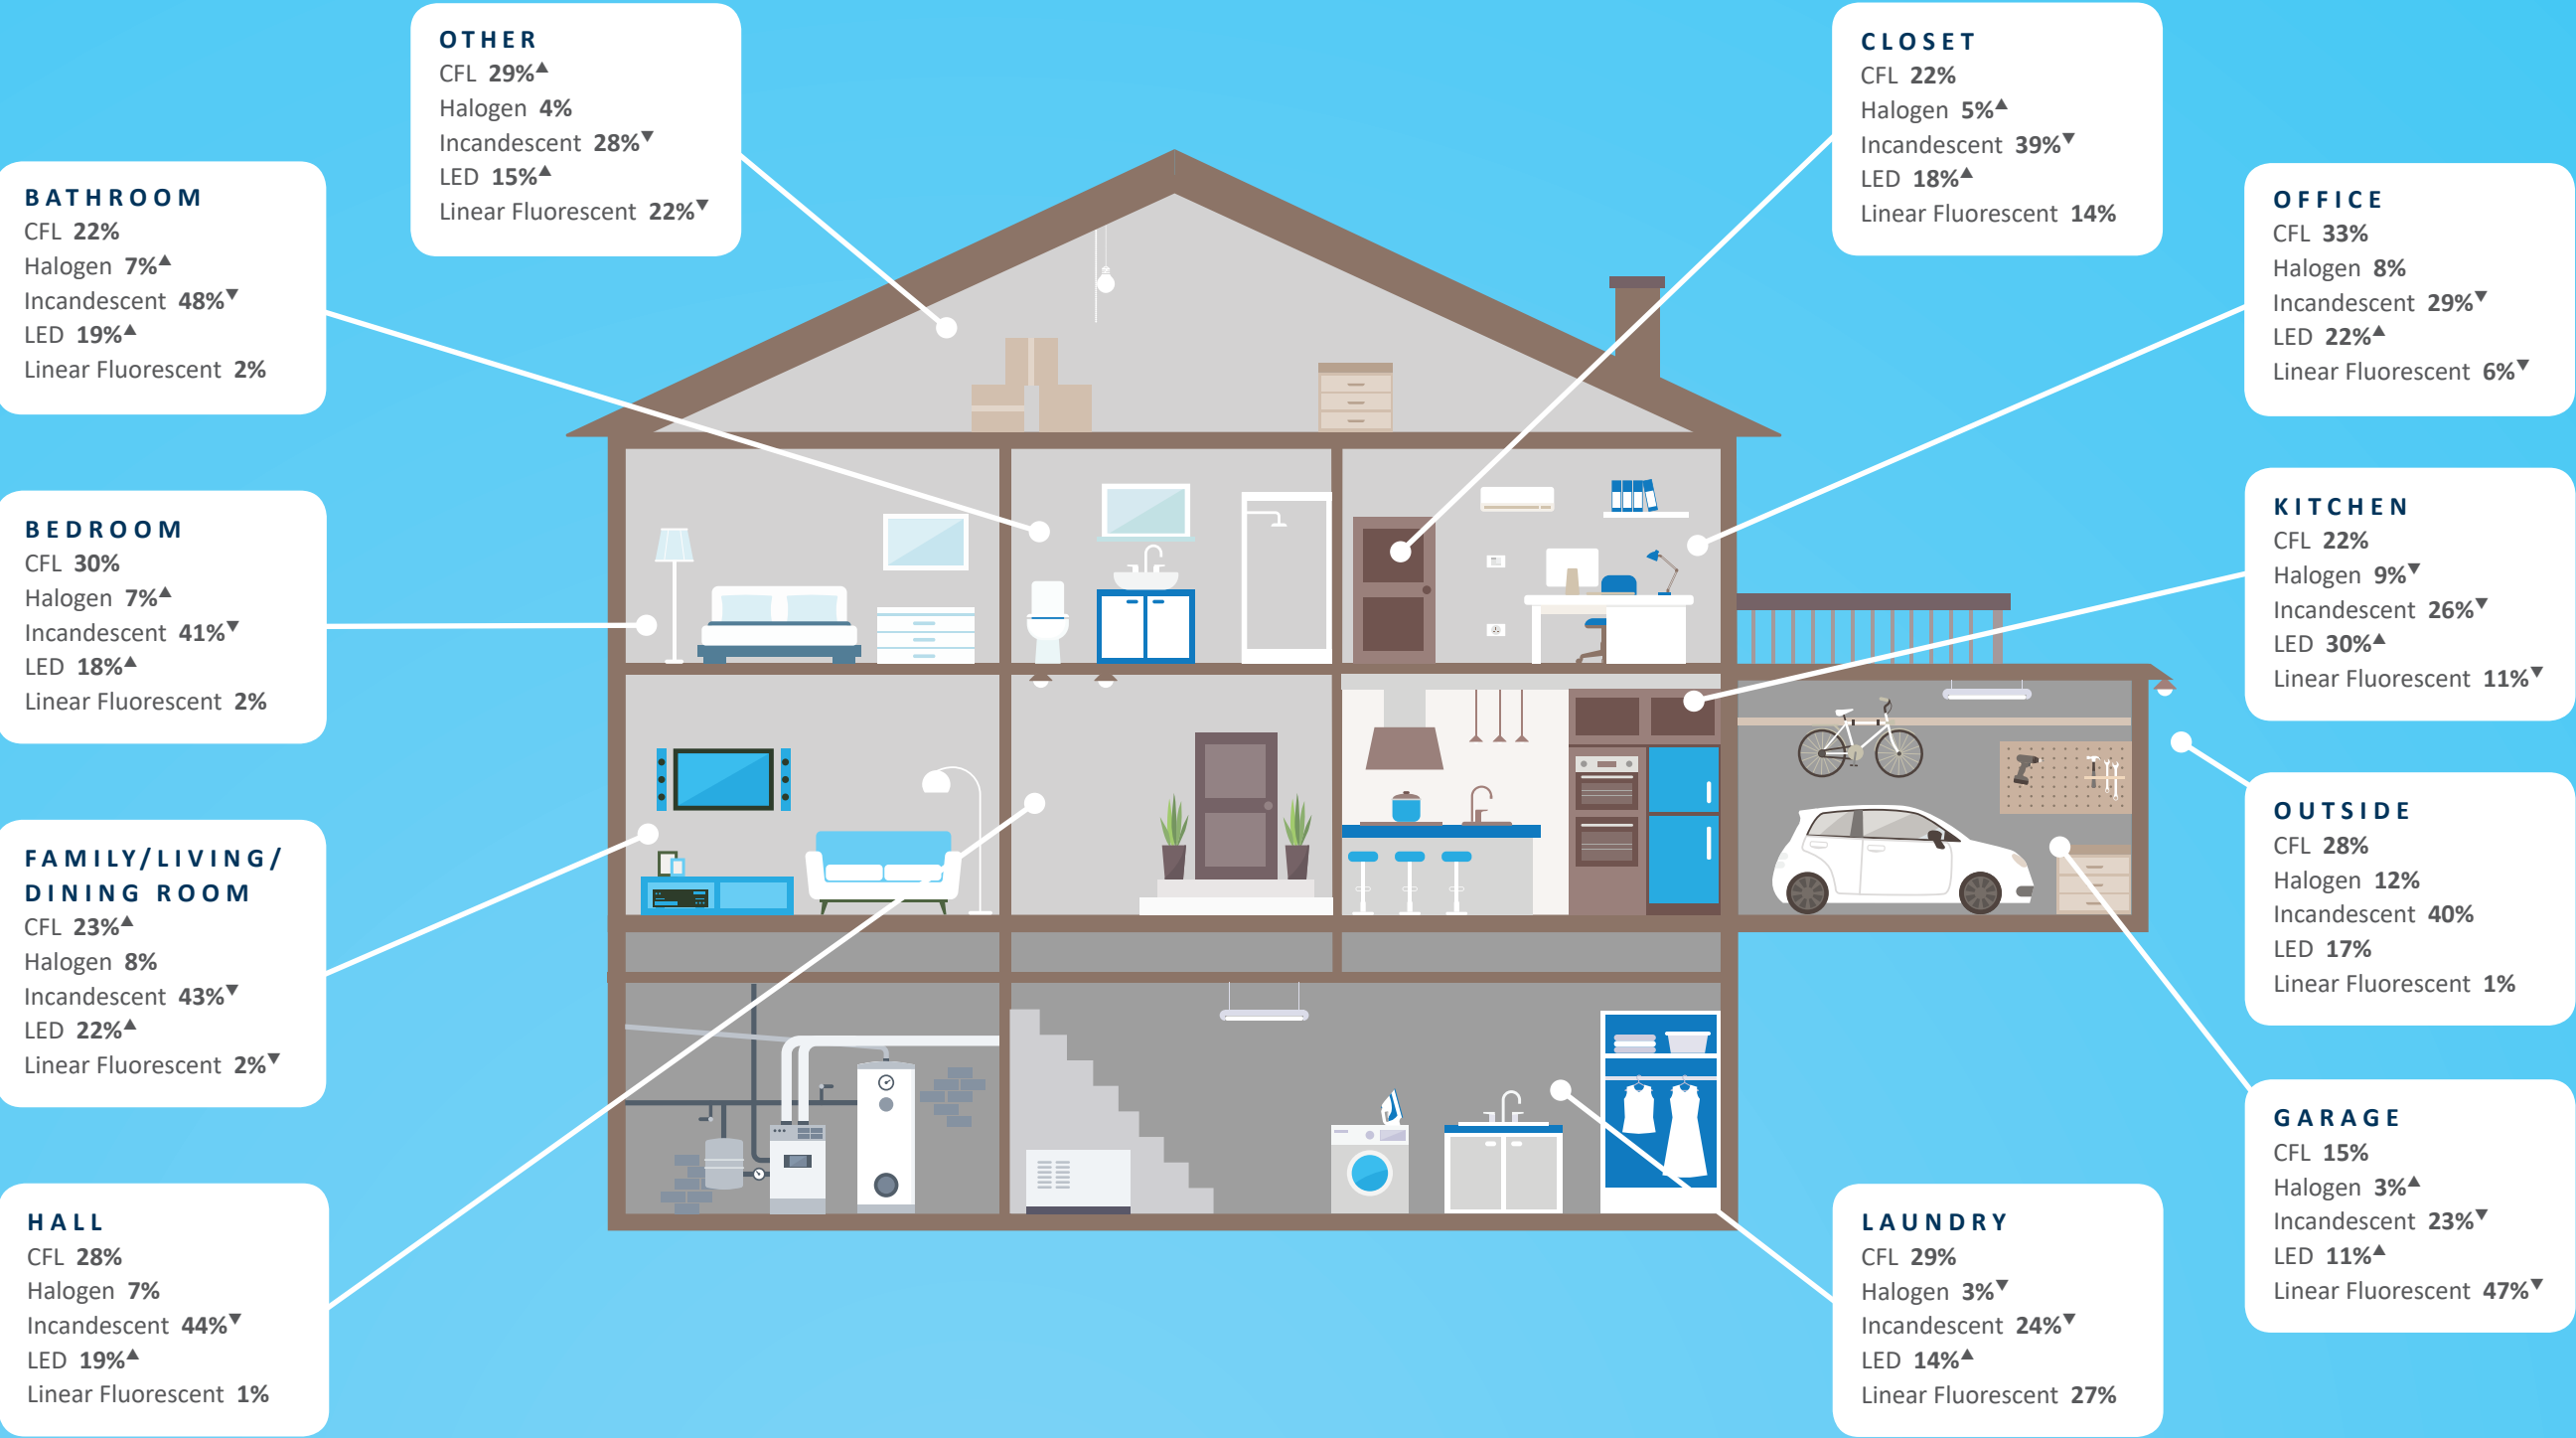


Percent of Homes with CFLs and LEDs by State

Almost every home has **at least one CFL**; more than three-quarters of Northwest homes have one or more LEDs.

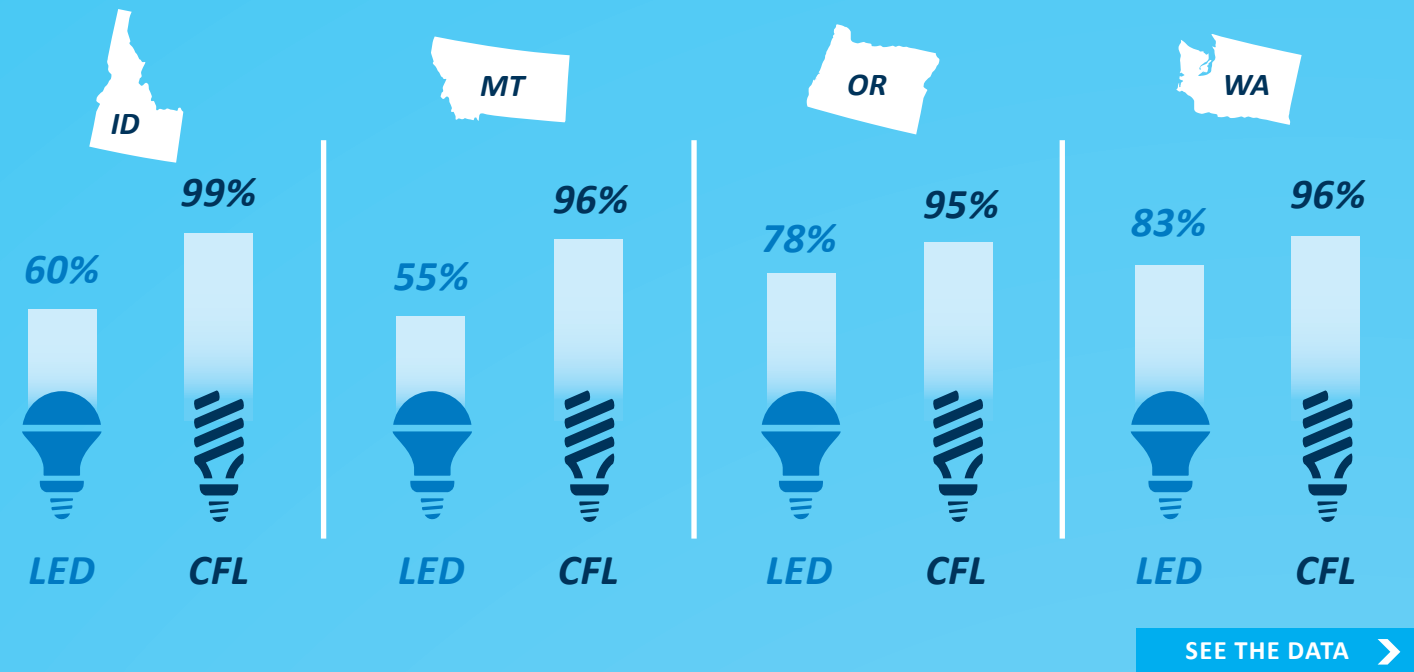

Distribution of Stored Bulbs

Of bulbs not in use (in storage), incandescent bulbs represent the **highest quantity**, followed by CFLs.

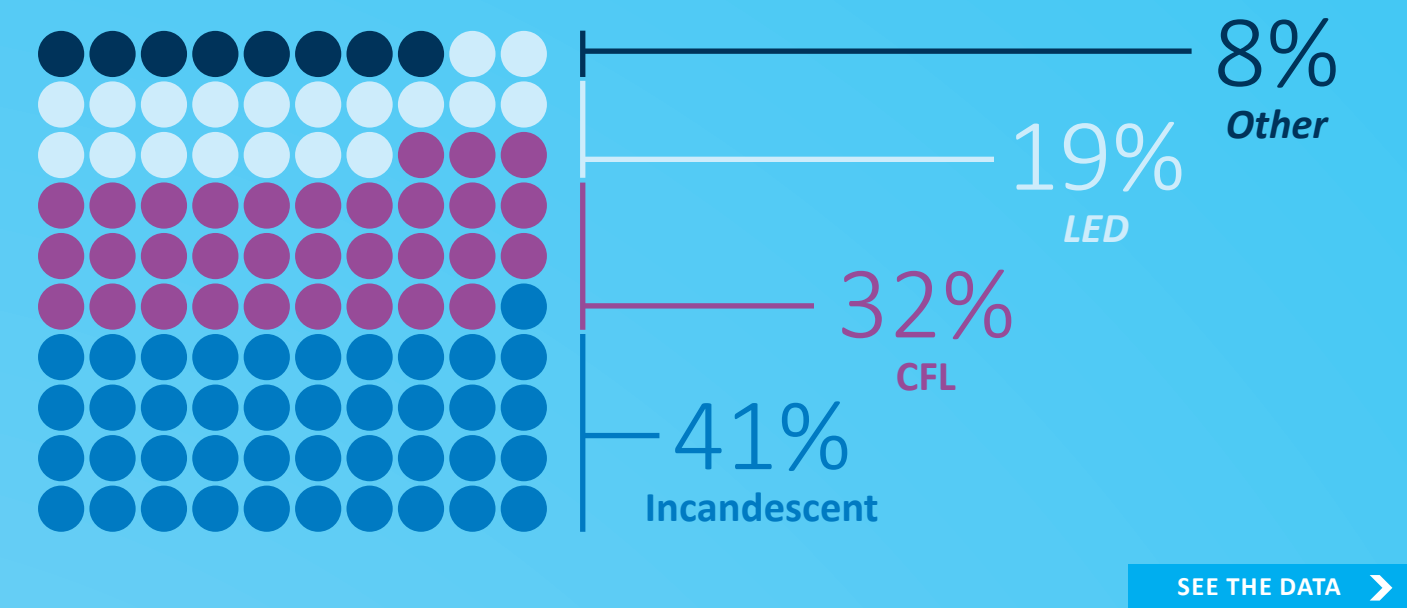


Home Lighting Power Density by Study


Due to the shift from inefficient incandescent bulbs to LEDs, the lighting power density (watt per sq. ft.) **decreased from 1.4 to 1.0**.



LED Installed by Owner Versus Renter

Homeowners are more likely than renters to have **at least one LED installed**.

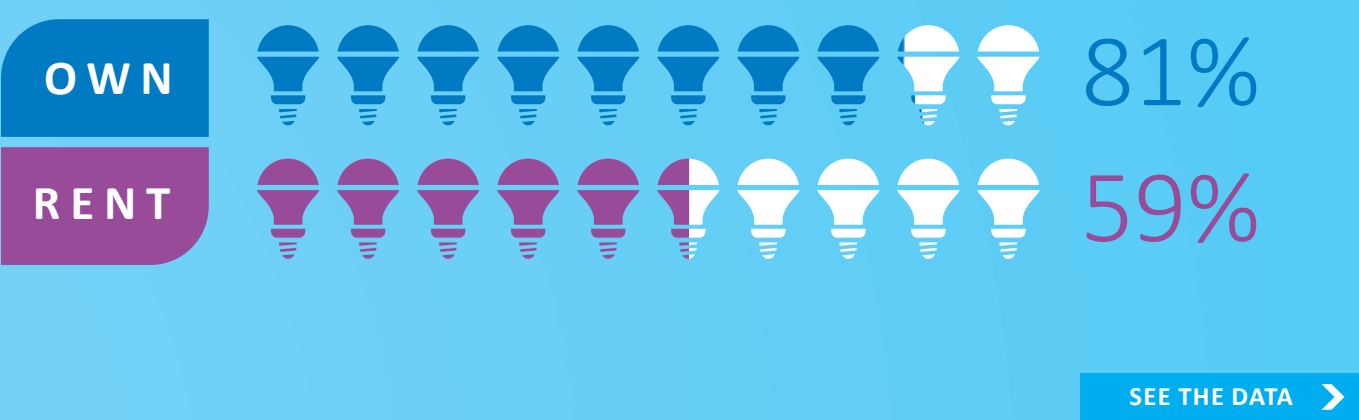



Description

# Appliances

The appliance data collection identified and characterized appliances in each home, including kitchen and laundry appliances. This section includes distribution of appliances by state and region, specific characteristics such as age and size, and appliance configurations such as door position for refrigerators. In many instances, Cadmus identified characteristic data such as age, efficiency, and size after the site visit through a combination of databases and other secondary sources.

For the first time, the RBSA II collected information about connected appliances (that is, appliances that are connected to the homes’ Wi-Fi). In addition to identifying the presence of clothes dryers and fuel type, the RBSA II captured more information regarding clothes dryer configurations and other details (included in Appendix A).

Federal energy efficiency standards can have a significant impact on appliance stock and efficiencies in particular. There have been a few federal efficiency standard changes since the previous RBSA. Appliances impacted by federal efficiency changes include the following equipment:


- Refrigerators and freezers (effective 2014)
  - Dehumidifiers (effective 2012)
- Clothes washers and dryers (effective 2015)
  - Dishwashers (effective 2013)

Key findings for appliances include:

- Appliance distributions, types, and efficiencies show some shift since the last RBSA. For instance, the distribution of clothes washer and refrigerator efficiencies and configurations changed.
- The average appliance age was 10 years, with 32% of dryers and 28% of dishwashers beyond their useful life. Useful life is based on Regional Technical Forum assumptions and ranges from 12 to 22 years, depending on the appliance.
- There were significant shifts in refrigerator configuration types: refrigerators with top freezers declined the most since the previous RBSA, and side-by-side refrigerators with bottom freezers increased the most. In general, side-by-side configuration refrigerators have been shown to consume more energy than single-door units when all else is equal.

Key Findings


## Average Number of Appliances per Home

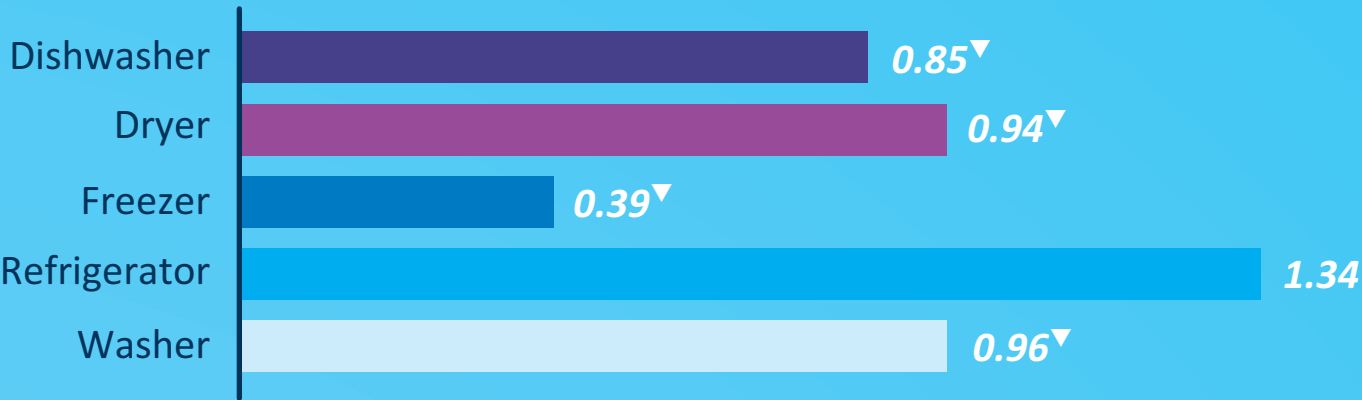

SEE THE DATA

## Distribution of Clothes Washer Types

Horizontal and vertical axis (without agitator) washers increased from a combined share of 39% to 57% across the region.

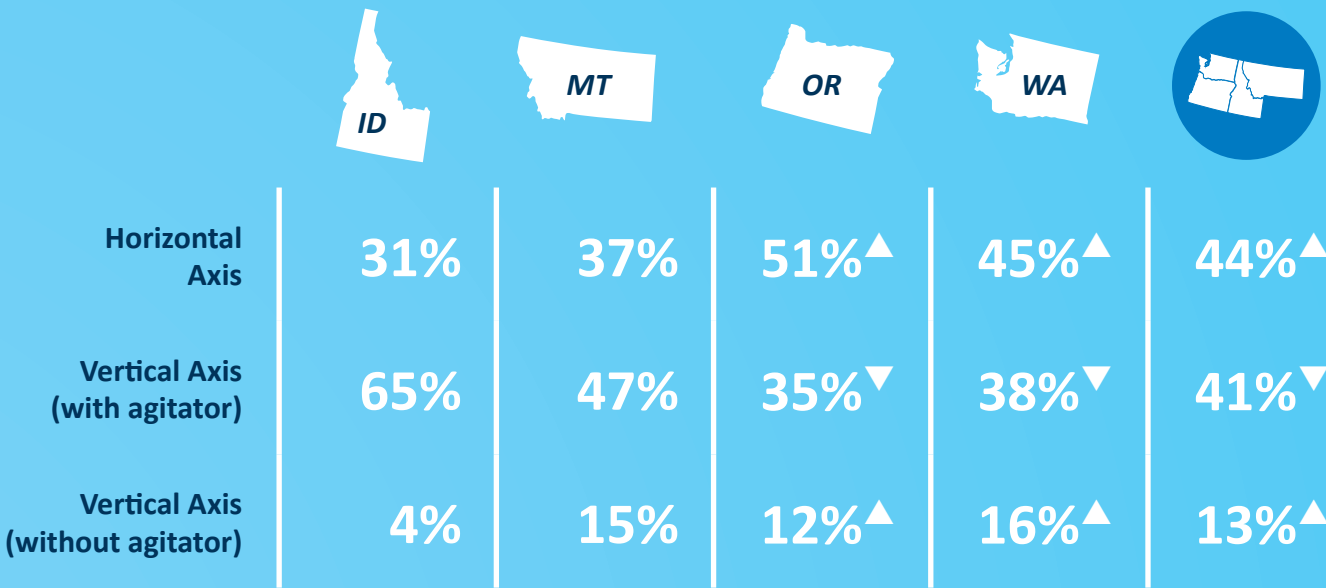


SEE THE DATA

▲ ▼ Statistically different from 2011 RBSA



Distribution of Clothes Dryer Fuel Types


The RBSA II found **92%** of dryers are electric, followed by natural gas (**7%**) and propane (**1%**).

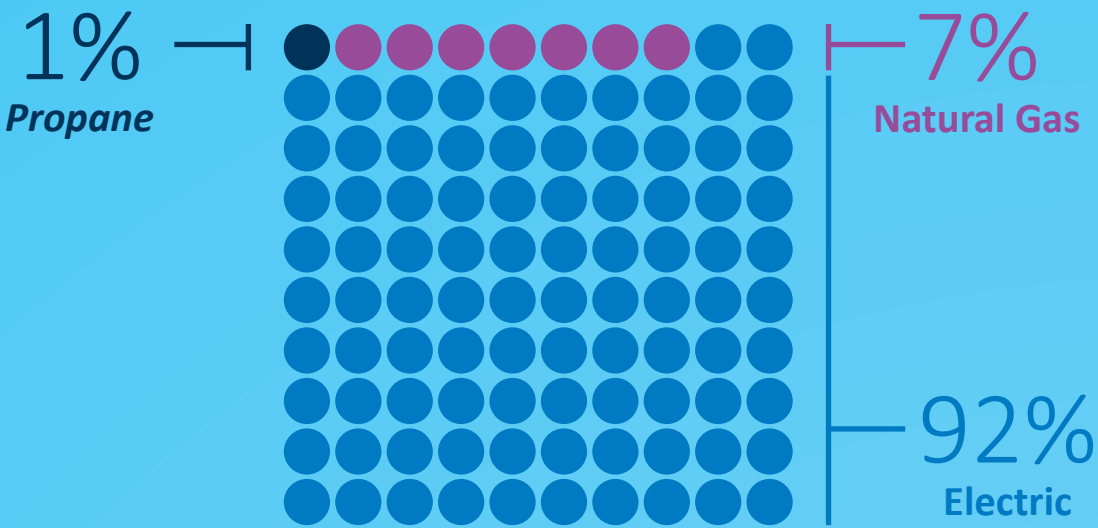

SEE THE DATA >

Appliance Age


Roughly **38% to 50%** of appliances were manufactured in 2010 or later.

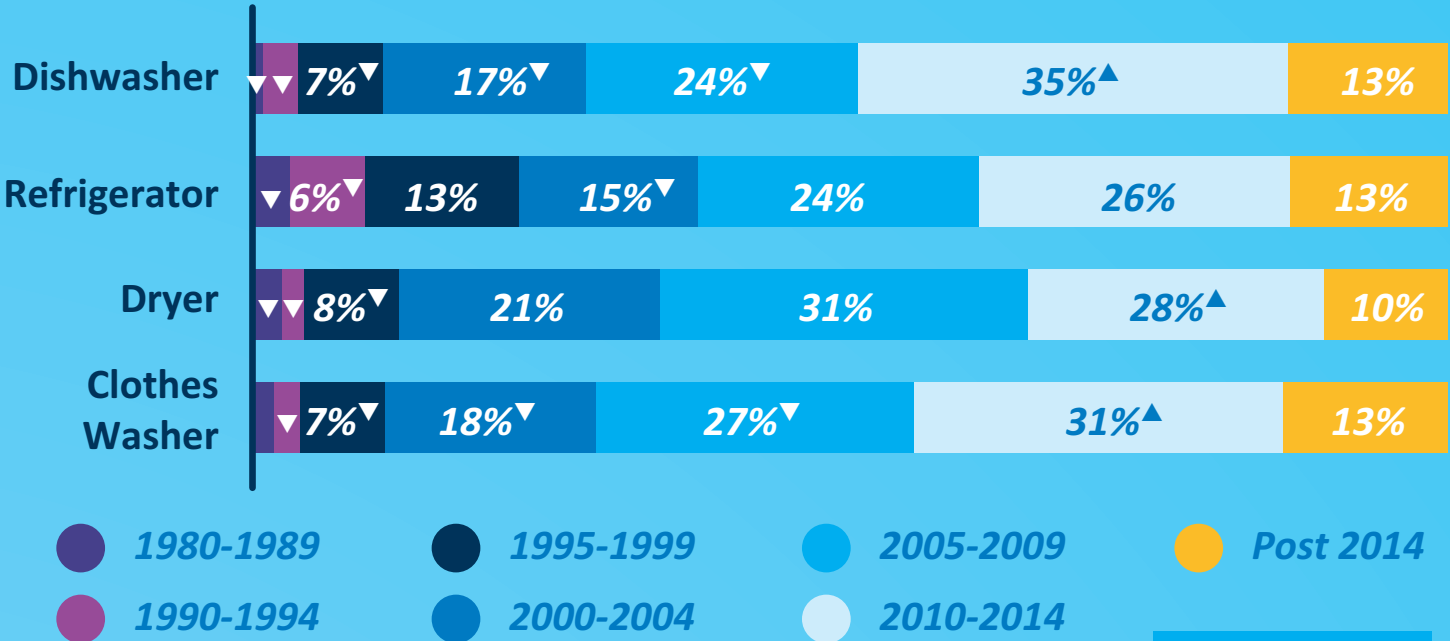

SEE THE DATA >

Distribution of Refrigerators by Type

There were **significant shifts** in refrigerator configuration types.

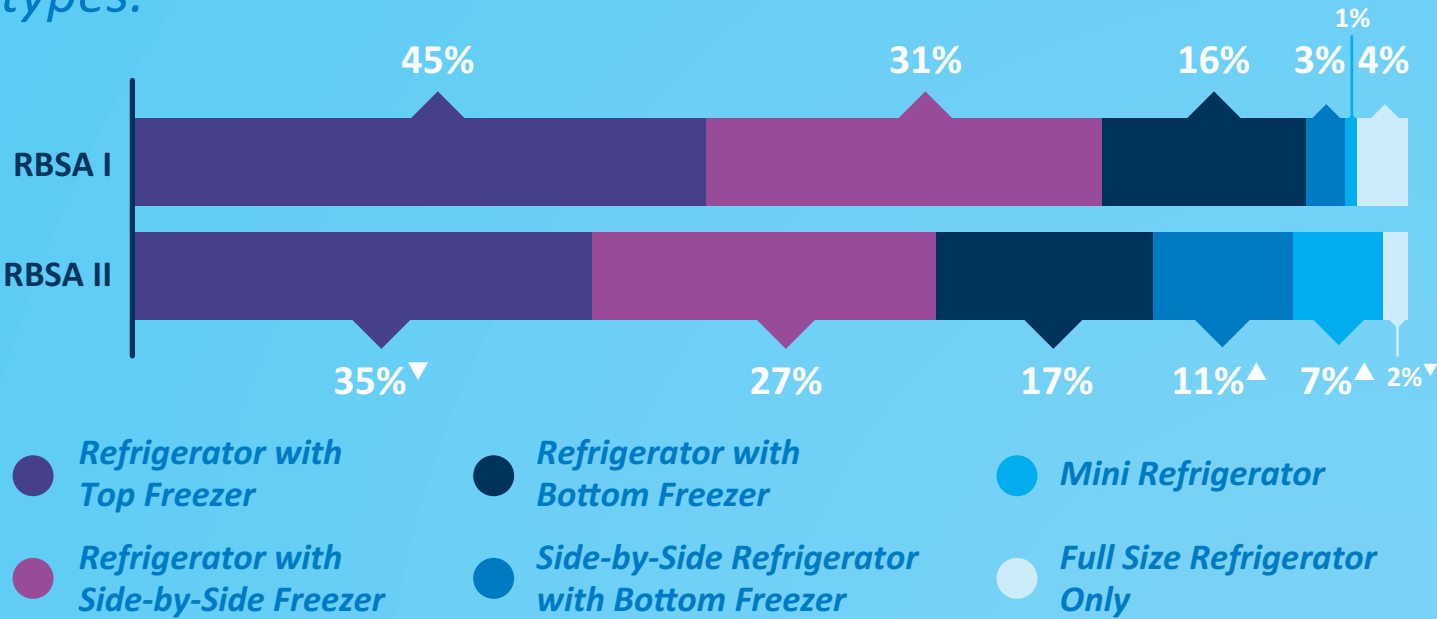


SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA

Proportion of Equipment Past Effective Useful Life

A **substantial proportion of appliances** are past their useful life.

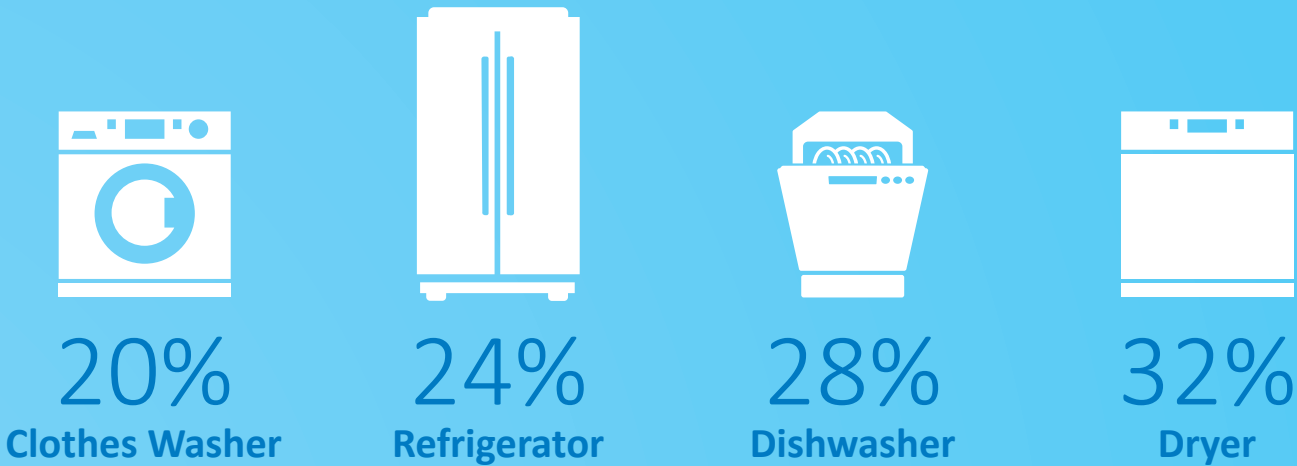

SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA



Description

Water End-Uses

Field technicians identified and characterized water heaters in each home. Specifically, they collected information regarding the water heater type, size, fuel, make, model, input capacity, and location. Location is especially important for heat pump water heaters (HPWHs) because the location may affect not only how much energy is required to heat water, but also how much energy is required to heat and cool the home. For example, the HPWH will have less impact on heating and cooling the farther it is from the thermostat and the more thermal buffers that exist between it and the thermostat. However, HPWH efficiency will decline in winter if the water heater is located outside of the thermal boundary. The RBSA II did not directly capture the distances and thermal buffers, but field technicians noted where electric water heaters were located by room type. Collected data also included additional information such as ceiling height near the water heater and proximity to exterior walls for running vent ducts. This may help programs identify how many electric water heaters can be easily replaced with HPWHs.

Field technicians also conducted a thorough walk-through for showerheads and faucet aerators. For these end uses, technicians captured the rated flowrate (if available) and measured flowrate using predetermined procedures and equipment. The end uses were classified as primary, secondary, or used about the same.

Federal energy efficiency standards can have a significant impact on water heater efficiencies. New federal efficiency changes for water heaters went into effect in 2015.

Key findings for water end-uses include:


- There were a few statistically significant shifts with water heaters, including water heater fuel type. Homes with gas water heaters increased by 6%, from 43% to 49%.
- Saturation share of instantaneous water heaters increased from 3% to 6%.
- Distribution of electric water heater location by space heating fuel type shows 41% are located in the main house, 30% in the basement, 23% in the garage, and the remaining 6% in other locations around the home.

Code Updates

Key Findings

Distribution of Water Heater Fuel Type by State


Homes with gas water heaters **increased 6%**, from 43% to 49%.

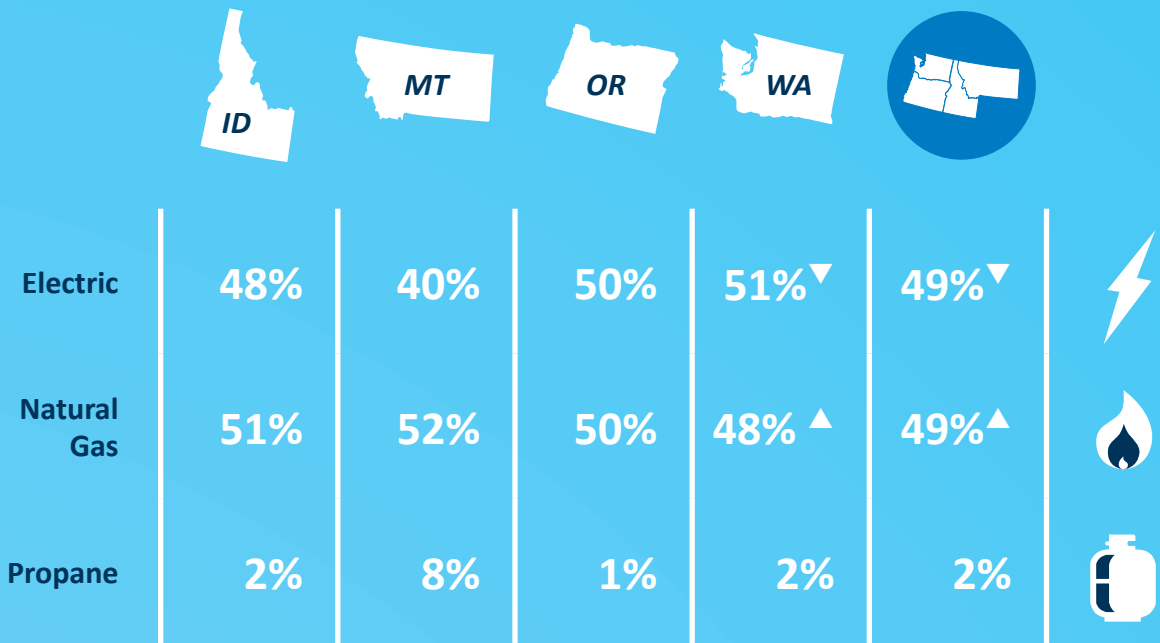

SEE THE DATA ➡

Distribution of Water Heater Type


HPWHs now account for approximately **2% of water heaters**.

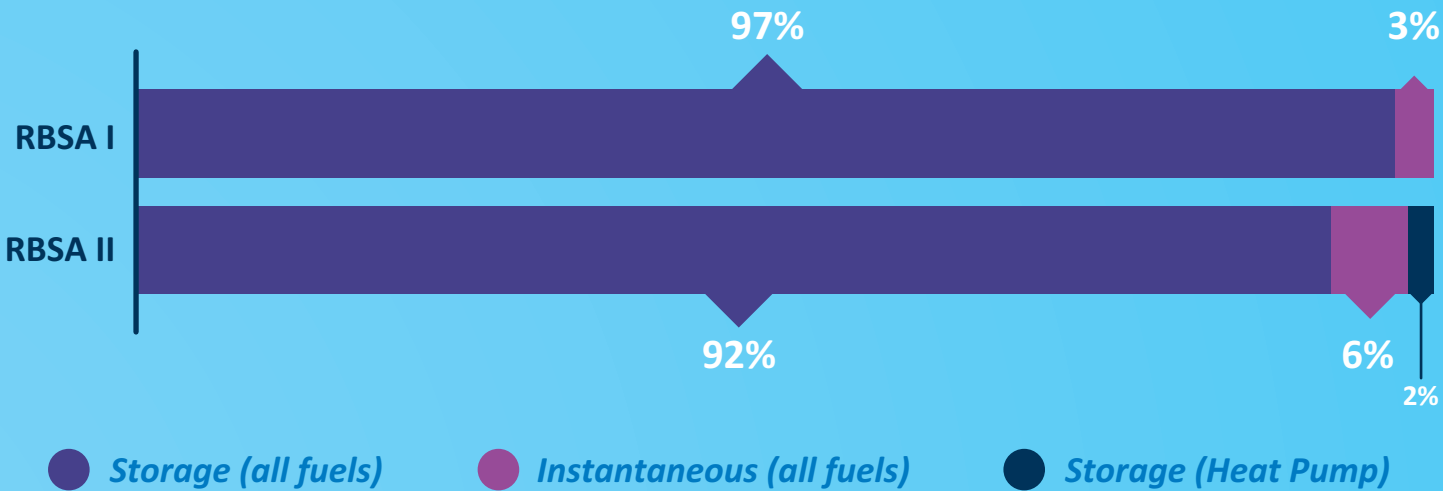

SEE THE DATA ➡

▲ ▼ Statistically different from 2011 RBSA

Distribution of Shower and Faucet Flow Rates (GPM)

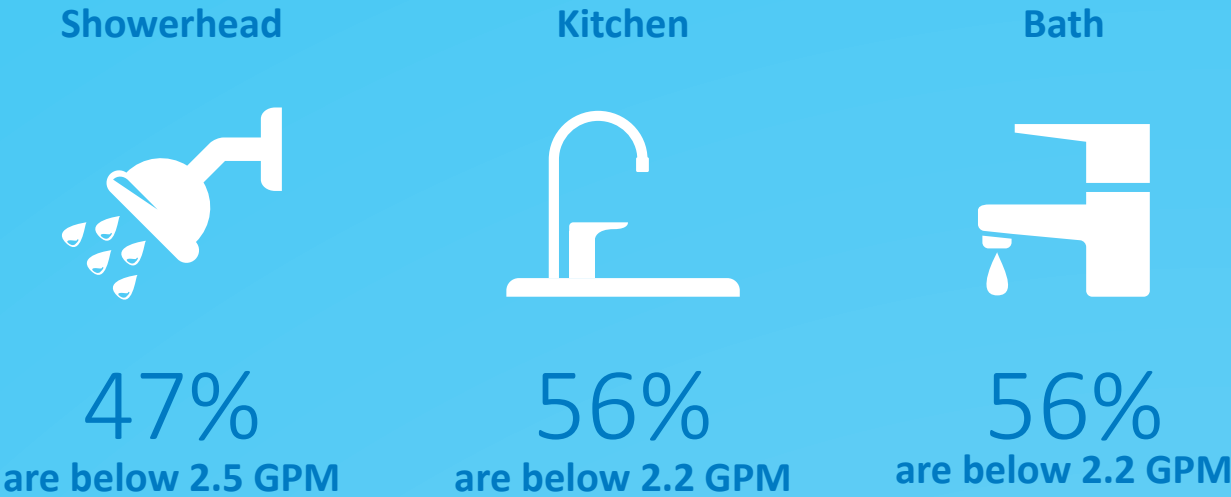


SEE THE DATA >

*This page intentionally left blank.*

Average Number of Showerheads and Faucets Per Home




Single Family Homes have **2.5** bathroom sinks, **0.7** standalone showers, and **0.8** shower and bath combo units

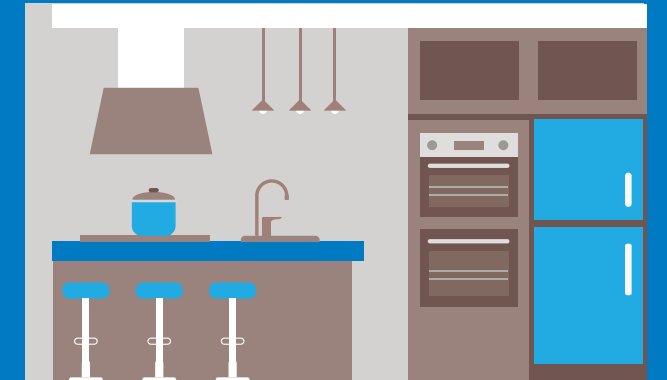

On average, homes have **1.1** kitchen sinks

SEE THE DATA >



Description

Electronics

The electronics walk-through identified and characterized electronics in each home. Equipment captured included a range of electronic devices from televisions to computers. Field technicians did not include portable devices such as iPads and phones because of their general mobility. This section includes distribution of electronics by state and region, along with specific characteristics such as size, type, and usage. In some instances, Cadmus identified characteristic data such as efficiency and size after the site visit by searching a third-party database, manufacturer data sheets, or other online resources.


The walk-through also included capturing information regarding power strips and auxiliary items that may be plugged into them. Field technicians measured the television wattage whenever possible, using a plug-through power meter, and recorded the presence of television peripherals such as Roku, Fire Stick, and Apple TV devices. Technicians asked participants about usage patterns (e.g., how many hours per day each television is typically on).

Key electronic findings include:

- There have been many advancements in television technology since the last RBSA. Cathode ray tube televisions represented about half of all televisions found in homes since the last RBSA, whereas currently they represent only 13% of televisions, with LED and LCD televisions representing over three-quarters of what is currently installed in homes.
- Households now contain fewer televisions (2.3 to 2.1 per household), and the percentage of televisions present by room type declined or stayed the same for most room types except bedrooms and living rooms. The percentage of bedrooms and living rooms containing a television increased from 25% and 29% in RBSA I to 37% and 35% today.
- Set-top boxes and audio systems are declining in numbers. The number of homes with set-top boxes declined from 81% in RBSA I to 64% in RBSA II. Audio systems per home saw a significant decline from approximately two per home to fewer than one per home (0.8) on average. These changes are likely due to the popularity of web-enabled televisions and streaming services such as Netflix and Spotify.


Distribution of Television Screen Types

Over **three-quarters of televisions** now use **LED or LCD technology**

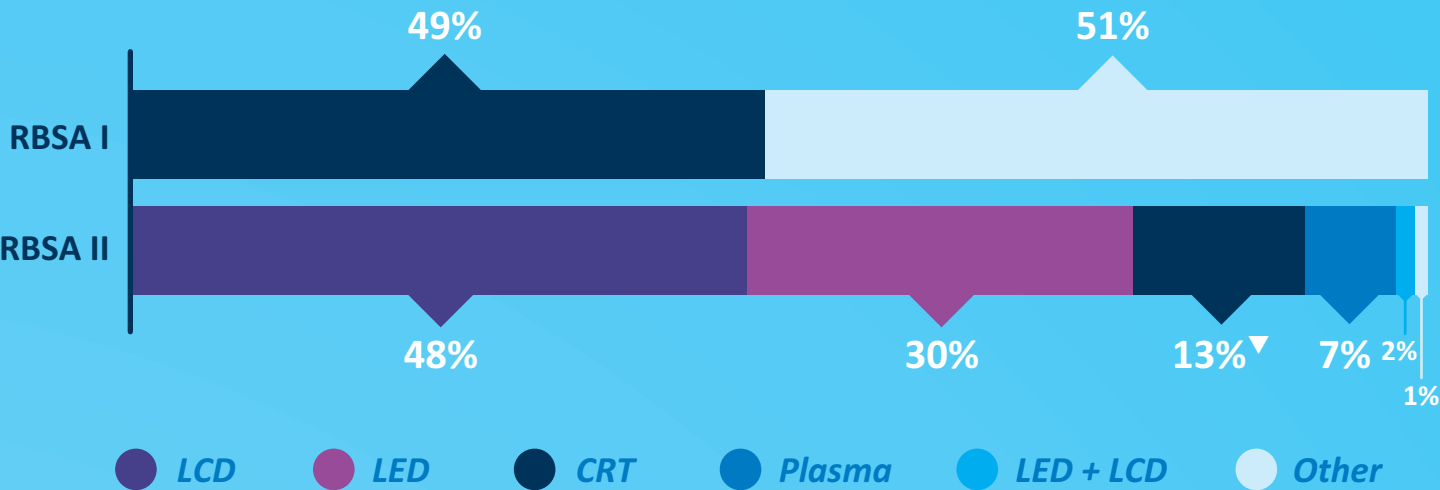

SEE THE DATA >

Television Power Draw

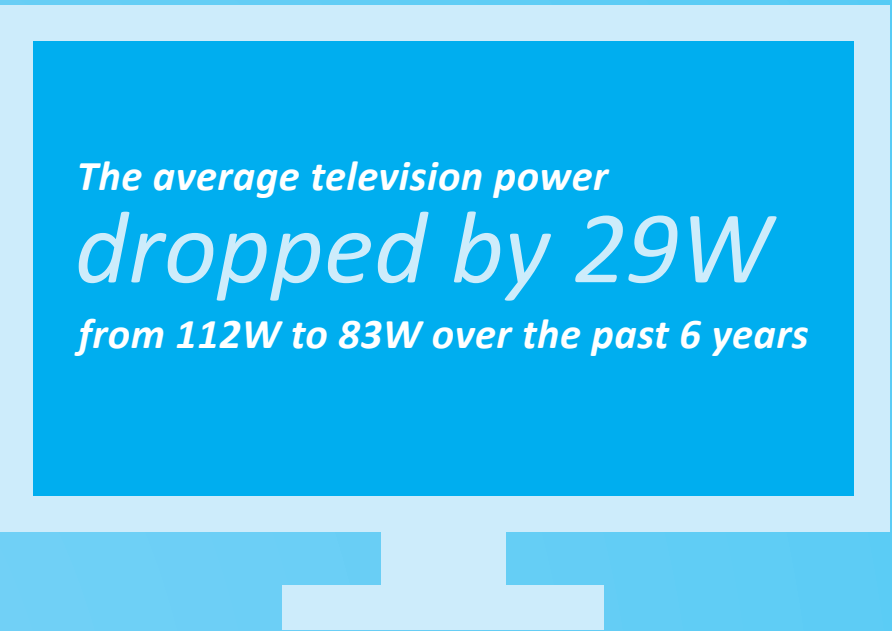


SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA


Percent of Homes with Game Consoles

The percentage of homes with gaming systems **declined** from 33% to 26%▼.

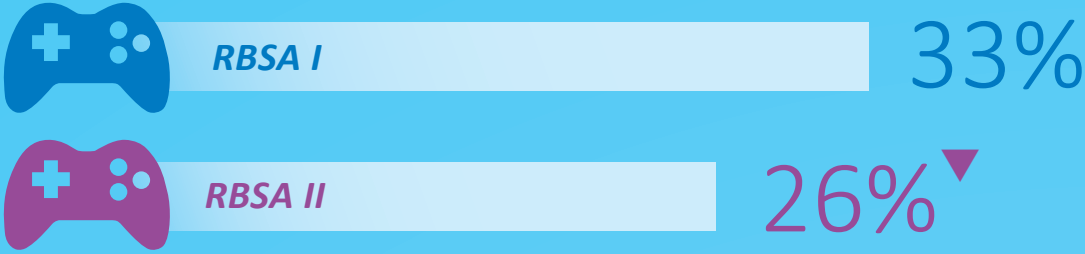

SEE THE DATA >

Percent of Homes with Set-Top Boxes

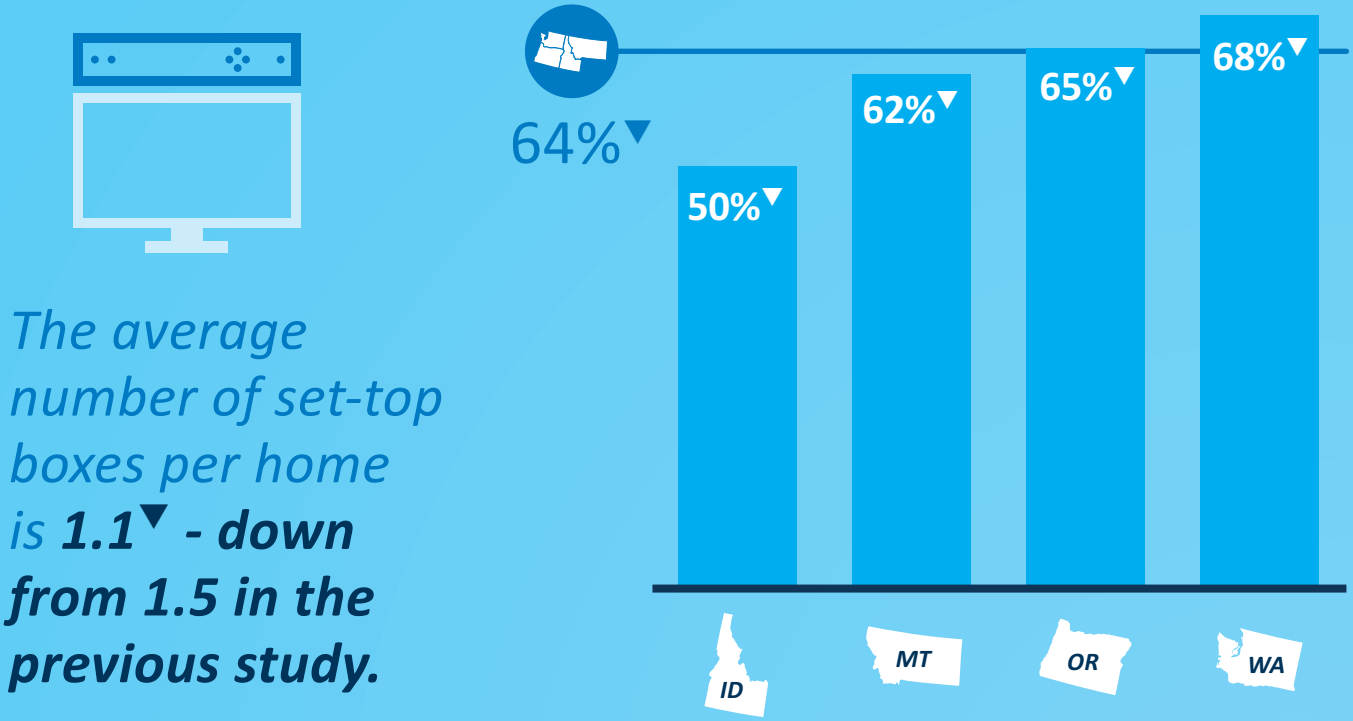

SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA



Standard strip  
98%



Smart strip  
2%

What percent of homes have a smart power strip?

SEE THE DATA >



Entertainment system  
43%



Office/computer  
32%


OTHER

Other devices  
24%

What are power strips being used for?

SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA



# Energy Benchmarking






## Description

Similar to the previous RBSA, the RBSA II provides an opportunity to calculate energy-use intensity (EUI) profiles. Cadmus conducted the RBSA II billing analysis using procedures and methods similar to those used for the previous study to allow for direct comparison of the results. Cadmus requested 24 months of electric and gas billing data for all 1,100 single-family participants. However, the team ultimately removed 121 sites for several reasons: the utilities did not provide billing information (most common), inconsistencies in data collection such as multiple readings on the same date or missing reads, or anomalies in the data such as lengthy vacancies or apparently erroneous readings. In the end, the analysis included billing data for 979 electric and 479 gas participants.

## Key Findings

- Key energy usage findings include:
- Average electric and gas usage per home remained relatively unchanged across the region from the last RBSA. There was a noticeable decline in other fuel use in Oregon and Washington.
  - Annual electric usage per square foot remained the same for Oregon and Washington, decreased by 1.5 kWh per square foot for Idaho, and increased by 1.8 for Montana.
  - Gas EUI decreased in Oregon and Washington but remained the same in Idaho and Montana. EUI for other fuel sources declined significantly in every state except for Idaho.
  - Higher electric EUIs were largely driven by whether a home had electric heating and electric water heating. Homes with large conditioned areas had lower EUIs. Variables such as efficient lighting and percentage of mechanical cooling did not vary much across quartiles.

## Average EUI by State and Fuel Type

	 ID	 MT	 OR	 WA	
Electric EUI per Home (kWh/sq.ft)	7.4	8.2 <sup>▲</sup>	7.5	8.0	7.8
Gas EUI per Home (therm/sq.ft)	0.4	0.5	0.3 <sup>▼</sup>	0.3 <sup>▼</sup>	0.3 <sup>▼</sup>
Other Fuel EUI per Home (kBtu/sq.ft)	4.6 <sup>▼</sup>	7.1	4.2 <sup>▼</sup>	2.5 <sup>▼</sup>	3.6 <sup>▼</sup>

SEE THE DATA ➤

## Electric EUI Quartiles and Corresponding Housing Characteristics

	Conditioned Area	Electric Heat	Efficient Lighting	Air Conditioning	Electric Hot Water
EUI Quartile 1 (<3.55)	2,488	5%	47%	58%	17%
EUI Quartile 2 (3.55-5.96)	2,179	19%	43%	62%	30%
EUI Quartile 3 (5.96-9.26)	2,014	39%	44%	72%	57%
EUI Quartile 4 (>9.26)	1,377	76%	40%	47%	81%

SEE THE DATA ➤

▲ ▼ Statistically different from 2011 RBSA





Description

# Conservation, Purchases, and Miscellaneous Loads


As part of the recruitment process, recruitment specialists asked a series of questions related to household purchases and energy efficiency awareness. Specifically, specialists inquired if households had participated in rebate programs and, if so, which ones and what the participant purchased. The recruitment specialists also asked if participants received any federal, state, or local tax credits, or if they completed a home energy assessment in the past two years. Finally, specialists asked participants whether they or a landlord pay their gas and electrical bills and whether they receive financial assistance for their utility bills (and if so, what portion of the bill is covered by financial assistance).

Data collection also captured information about miscellaneous and uncommon loads such as electric vehicle chargers, solar panels, smart home devices, well pumps, and pool and sauna equipment.

Key conservation, awareness, and miscellaneous findings include:


- A higher percentage of participants reported implementing conservation improvements without utility incentives in the past two years in this study compared to the previous RBSA (64% and 48%, respectively). This upward trend was true for all states except for Montana, which remained about the same. Out of the participants reporting some sort of energy efficient home improvement, roughly the same percentage as the last RBSA reported receiving an incentive from their utility (approximately 15% for the region).
- Approximately 3% of homes have solar panels, with Oregon and Washington having the most. Field technicians identified a small number of homes, nine in total, with electric vehicles present.
- Technicians also asked homeowners if they use or access any type of smart home device (such as a smart speaker like Google Home). Just over 9% of homeowners responded to having such devices, with Montana having the highest percentage of smart device users (11%).

Percent of Participants Reporting They Implemented Some Kind of Self-Funded Conservation Improvement

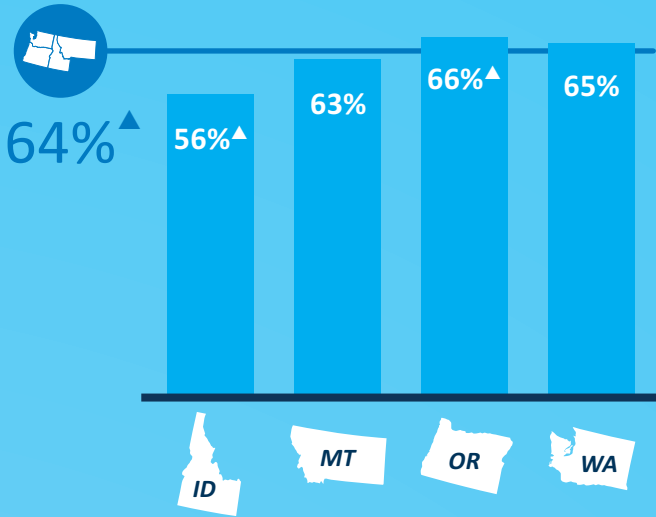


SEE THE DATA >

Percent of Participants Reporting They Received State or Federal Tax Credit for an Energy Efficient Upgrade

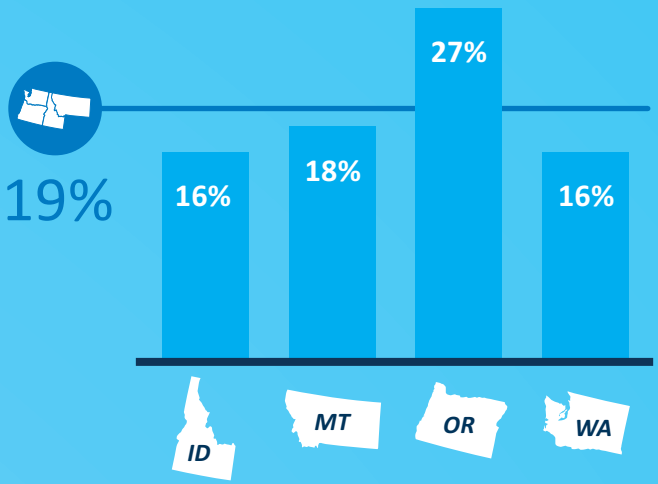

SEE THE DATA >


Percent of Participants Reporting Use of Utility Incentives

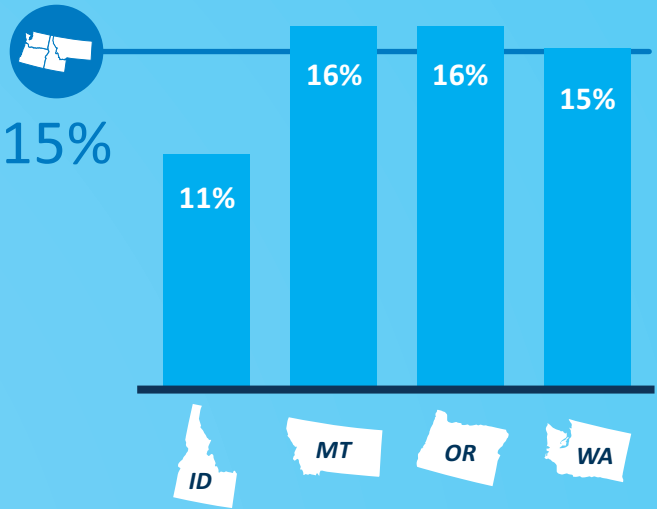

SEE THE DATA >

▲ ▼ Statistically different from 2011 RBSA

Distribution of Households with Solar Panels

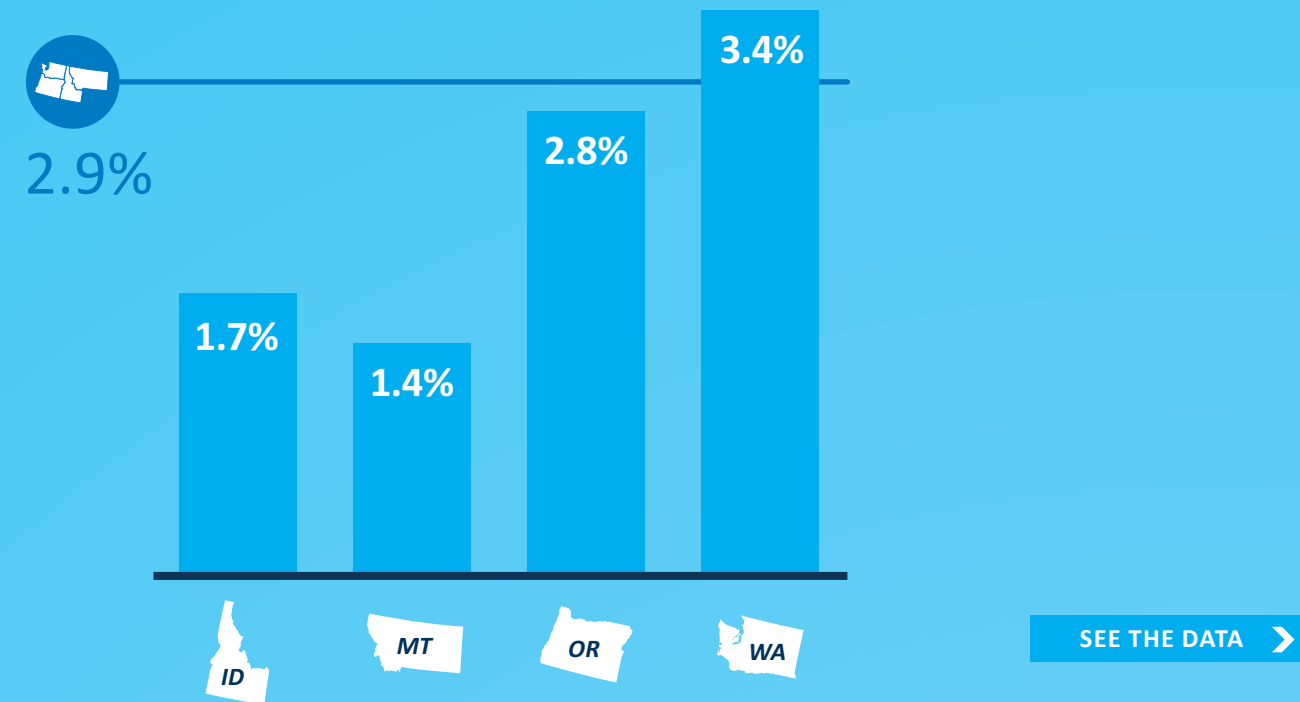

*Less than **1%** of households have electric vehicles*

SEE THE DATA >



*Just under **9%** of participants indicated they use any type of smart home device (such as a smart speaker)*

SEE THE DATA



***4.5%** of participants reported completing a home energy audit in the past 2 years*

SEE THE DATA

*This page intentionally left blank.*





# RESIDENTIAL BUILDING STOCK ASSESSMENT

**Appendix A:  
Report Tables**

# Introduction

This appendix presents findings for single-family homes based on data collected for the core RBSA II study (funded by NEEA) and on data collected for three oversamples funded by the Bonneville Power Administration, Seattle City Light, and the Snohomish Public Utility District. Cadmus developed and applied sampling weights to ensure that all single-family home observations were weighted proportionally to the segment of the population represented by the sample; see the Database User Manual for a description of the weighting methods and procedures.

Where possible, Cadmus benchmarked the findings of the RBSA II against the findings presented in the RBSA I. Statistically significant differences between the two reports are denoted by either a ▲ or ▼ symbol, to indicate whether the RBSA II value is higher or lower than the value in the RBSA I study. This appendix identifies which table in the previous study was used to draw conclusions about each statistically significant difference.

New tables and categories presented in this document that do not have a corollary in the RBSA I study do not have symbols indicating statistically significant increases or decreases from RBSA I, though statistically significant differences may exist. Without a comparable table in the RBSA I report, statistical testing could not be performed.

# Contents

Table 1. DISTRIBUTION OF HOMES BY TYPE AND STATE.....	9
Table 2. DISTRIBUTION OF HOMES BY VINTAGE AND STATE .....	9
Table 3. DISTRIBUTION OF HOMES BY GROUND CONTACT TYPE AND STATE .....	10
Table 4. AVERAGE CONDITIONED FLOOR AREA BY STATE .....	10
Table 5. AVERAGE CONDITIONED FLOOR AREA BY VINTAGE AND STATE.....	11
Table 6. DISTRIBUTION OF HOMES BY BUILDING HEIGHT AND STATE .....	11
Table 7. AVERAGE NUMBER OF BEDROOMS PER HOME BY STATE .....	12
Table 8. AVERAGE NUMBER OF BATHROOMS PER HOME BY STATE .....	12
Table 9. AVERAGE ROOM AREAS BY ROOM TYPE .....	13
Table 10. DISTRIBUTION OF FRAME WALL INSULATION LEVELS BY FRAMING TYPE .....	14
Table 11. DISTRIBUTION OF WALL FRAMING TYPES BY VINTAGE.....	14
Table 12. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE .....	15
Table 13. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, IDAHO.....	15
Table 14. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, MONTANA.....	16
Table 15. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, OREGON .....	16
Table 16. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, WASHINGTON .....	17
Table 17. DISTRIBUTION OF MASONRY WALL INSULATION LEVELS BY HOME VINTAGE.....	17
Table 18. DISTRIBUTION OF OBSERVED WALL SHEATHING INSULATION BY FRAMING TYPE.....	18
Table 19. PERCENTAGE OF HOMES WITH BASEMENTS BY STATE.....	18
Table 20. PERCENTAGE OF BASEMENTS THAT ARE CONDITIONED BY STATE .....	19
Table 21. DISTRIBUTION OF BASEMENT SLAB INSULATION BY INSULATION LEVEL .....	19
Table 22. PERCENTAGE OF HOMES WITH FLOOR AREA OVER CRAWLSPACE BY STATE .....	20
Table 23. DISTRIBUTION OF FLOOR INSULATION BY HOME VINTAGE .....	20
Table 24. PERCENTAGE OF CRAWLSPACES WITH INSULATED WALLS BY STATE.....	21
Table 25. PERCENTAGE OF HOMES WITH ATTICS BY STATE .....	21
Table 26. DISTRIBUTION OF ATTIC INSULATION LEVELS .....	22
Table 27. PERCENTAGE OF HOMES WITH VAULT CEILINGS BY STATE .....	22
Table 28. PERCENTAGE OF HOMES WITH ROOF DECK CEILINGS BY STATE .....	23
Table 29. DISTRIBUTION OF VAULT CEILING INSULATION LEVEL.....	23
Table 30. DISTRIBUTION OF DOOR TYPES .....	24
Table 31. DISTRIBUTION OF WINDOW TYPES BY STATE .....	24
Table 32. PERCENTAGE OF HOMES WITH STORM WINDOWS BY STATE .....	25

Table 33. WINDOW AREA TO FLOOR AREA RATIO BY PRESENCE OF BASEMENT .....	25
Table 34. AVERAGE NORMALIZED HEAT-LOSS RATE BY VINTAGE AND STATE .....	26
Table 35. AVERAGE HEAT-LOSS RATE BY VINTAGE AND STATE .....	26
Table 36. AVERAGE BLOWER DOOR AIR FLOW BY STATE .....	27
Table 37. AVERAGE BLOWER DOOR AIR TIGHTNESS BY STATE .....	27
Table 38. AVERAGE BLOWER DOOR AIR TIGHTNESS BY HOME VINTAGE .....	28
Table 39. AVERAGE INFILTRATION RATE BY STATE, ACH50 DIVIDED BY 20 .....	29
Table 40. DISTRIBUTION OF PRIMARY HEATING SYSTEMS .....	29
Table 41. DISTRIBUTION OF FUEL CHOICE FOR PRIMARY HEATING SYSTEMS BY STATE .....	30
Table 42. DISTRIBUTION OF SECONDARY HEATING SYSTEMS BY SYSTEM TYPE .....	31
Table 43. DISTRIBUTION OF FUEL CHOICE BY SECONDARY HEATING SYSTEM AND STATE .....	32
Table 44. DISTRIBUTION OF FUEL CHOICE, FORCED AIR FURNACES .....	32
Table 45. DISTRIBUTION OF FUEL CHOICE, BOILERS .....	33
Table 46. DISTRIBUTION OF FUEL CHOICE, COMBUSTION HEATING STOVES .....	33
Table 47. AVERAGE GAS FURNACE EFFICIENCY (AFUE) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE AND STATE .....	34
Table 48. DISTRIBUTION OF GAS FURNACE EFFICIENCY (AFUE) FOR PRIMARY SYSTEMS BY STATE .....	34
Table 49. AVERAGE AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE .....	35
Table 50. DISTRIBUTION OF AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY STATE .....	35
Table 51. PERCENTAGE OF HOMES WITH COOLING EQUIPMENT BY COOLING ZONE AND STATE .....	36
Table 52. DISTRIBUTION OF PRIMARY COOLING SYSTEMS IN COOLING ZONES BY TYPE .....	37
Table 53. AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AC SYSTEMS BY VINTAGE .....	37
Table 54. AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AIR SOURCE HEAT PUMP SYSTEMS BY VINTAGE .....	38
Table 55. AVERAGE NUMBER OF PORTABLE COOLING DEVICES PER HOME BY STATE .....	38
Table 56. PERCENTAGE OF HOMES WITH DUCT SYSTEMS BY STATE .....	39
Table 57. DISTRIBUTION OF DUCTS PER HOME IN UNCONDITIONED SPACE BY STATE .....	39
Table 58. DISTRIBUTION OF DUCT INSULATION LEVELS .....	40
Table 59. AVERAGE TRUE FLOW BY STATE .....	40
Table 60. AVERAGE TRUE FLOW BY STATE .....	41
Table 61. AVERAGE CFM PER TON BY SYSTEM TYPE .....	41
Table 62. AVERAGE NUMBER OF LAMPS PER HOME BY STATE .....	42
Table 63. AVERAGE NUMBER OF FIXTURES PER HOME .....	42
Table 64. DISTRIBUTION OF LAMPS BY EISA CATEGORY AND STATE .....	43
Table 65. DISTRIBUTION OF LAMPS BY TYPE AND STATE .....	44

Table 66. DISTRIBUTION OF LAMPS BY TYPE AND ROOM.....	45
Table 67. AVERAGE NUMBER OF CFLS INSTALLED PER HOME BY STATE.....	46
Table 68. AVERAGE NUMBER OF LEDS INSTALLED PER HOME BY STATE .....	46
Table 69. AVERAGE NUMBER OF HALOGEN LAMPS INSTALLED PER HOME BY STATE .....	47
Table 70. AVERAGE NUMBER OF INCANDESCENT LAMPS INSTALLED PER HOME BY STATE.....	47
Table 71. AVERAGE NUMBER OF LINEAR FLUORESCENT LAMPS INSTALLED PER HOME BY STATE .....	48
Table 72. AVERAGE NUMBER OF OTHER LAMPS INSTALLED PER HOME BY STATE.....	48
Table 73. PERCENT OF HOMES WITH CFLS BY STATE.....	49
Table 74. PERCENT OF HOMES WITH LEDS BY STATE .....	49
Table 75. PERCENTAGE OF HOMES WITH LEDS BY STATE AND OWNERSHIP TYPE .....	50
Table 76. PERCENTAGE OF HOMES WITH CONNECTED LIGHTING BY STATE.....	50
Table 77. PERCENTAGE OF HOMES WITH GROW LIGHTS BY STATE .....	51
Table 78. AVERAGE NUMBER OF STORED COMPACT FLUORESCENT LAMPS BY STATE .....	52
Table 79. PERCENTAGE OF ALL CFLS THAT ARE STORED.....	52
Table 80. AVERAGE NUMBER OF STORED LED LAMPS BY STATE.....	53
Table 81. PERCENTAGE OF ALL LEDS THAT ARE STORED .....	53
Table 82. AVERAGE NUMBER OF STORAGE BULBS BY BULB TYPE AND STATE.....	54
Table 83. DISTRIBUTION OF STORAGE BULBS BY BULB TYPE AND STATE.....	55
Table 84. AVERAGE HOUSEHOLD WATTS PER BULB BY STATE .....	55
Table 85. AVERAGE LIGHTING POWER DENSITY (LPD) BY STATE .....	56
Table 86. AVERAGE LIGHTING POWER DENSITY (LPD) BY ROOM TYPE .....	57
Table 87. AVERAGE NUMBER OF APPLIANCES PER HOME BY TYPE.....	58
Table 88. AVERAGE MANUFACTURE DATE OF APPLIANCES BY TYPE.....	58
Table 89. DISTRIBUTION OF REFRIGERATOR/FREEZERS BY VINTAGE .....	59
Table 90. DISTRIBUTION OF REFRIGERATORS BY TYPE .....	60
Table 91. AVERAGE REFRIGERATOR VOLUME BY TYPE.....	61
Table 92. DISTRIBUTION OF FREEZERS BY TYPE IN HOMES WITH FREEZERS .....	61
Table 93. AVERAGE FREEZER VOLUME BY TYPE.....	62
Table 94. DISTRIBUTION OF CLOTHES WASHERS BY VINTAGE.....	62
Table 95. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND STATE .....	63
Table 96. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND VINTAGE.....	64
Table 97. AVERAGE NUMBER OF CLOTHES WASHER LOADS PER WEEK BY STATE .....	64
Table 98. AVERAGE CLOTHES WASHER SIZE (CU. FT.) BY STATE .....	65
Table 99. DISTRIBUTION OF CLOTHES DRYERS BY VINTAGE .....	65
Table 100. DISTRIBUTION OF DRYERS BY FUEL TYPE AND STATE .....	66

Table 101. DISTRIBUTION OF VENTED DRYERS BY STATE .....	66
Table 102. PERCENTAGE OF DRYER LOADS PER WASHER LOAD BY STATE .....	67
Table 103. DISTRIBUTION OF DISHWASHERS BY VINTAGE .....	67
Table 104. AVERAGE NUMBER OF DISHWASHER LOADS PER WEEK .....	68
Table 105. DISTRIBUTION OF COOK TOP FUEL BY TYPE .....	68
Table 106. DISTRIBUTION OF OVEN FUEL BY TYPE.....	69
Table 107. PERCENT OF APPLIANCES BEYOND MEASURE LIFE BY STATE .....	69
Table 108. PERCENTAGE OF APPLIANCES THAT ARE WI-FI COMPATIBLE BY APPLIANCE TYPE AND STATE .....	70
Table 109. DISTRIBUTION OF WATER HEATER FUEL BY STATE .....	70
Table 110. DISTRIBUTION OF WATER HEATERS BY TYPE .....	71
Table 111. DISTRIBUTION OF WATER HEATERS BY DETAILED TYPE.....	71
Table 112. DISTRIBUTION OF WATER HEATER LOCATION BY STATE .....	72
Table 113. DISTRIBUTION OF ALL WATER HEATER LOCATIONS BY SPACE HEATING FUEL TYPE .....	72
Table 114. DISTRIBUTION OF ELECTRIC WATER HEATER LOCATION BY PRIMARY SPACE HEATING FUEL TYPE .....	73
Table 115. DISTRIBUTION OF GAS WATER HEATER LOCATION BY SPACE HEATING FUEL TYPE .....	73
Table 116. DISTRIBUTION OF TANK SIZE BY FUEL TYPE.....	74
Table 117. DISTRIBUTION OF ELECTRIC WATER HEATER TANK SIZE BY LOCATION .....	74
Table 118. DISTRIBUTION OF GAS WATER HEATER TANK SIZE BY LOCATION .....	75
Table 119. DISTRIBUTION OF WATER HEATERS BY VINTAGE.....	75
Table 120. AVERAGE NUMBER OF SHOWERHEADS AND FAUCETS PER HOME BY STATE .....	76
Table 121. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE .....	76
Table 122. PERCENTAGE OF HOMES WITH SHOWERHEADS ABOVE 2.0 GPM BY STATE .....	77
Table 123. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE .....	77
Table 124. DISTRIBUTION OF BATHROOM FAUCET FLOW RATE BY STATE.....	78
Table 125. DISTRIBUTION OF KITCHEN FAUCET FLOW RATE BY STATE .....	78
Table 126. AVERAGE NUMBER OF TELEVISIONS PER HOME BY STATE .....	79
Table 127. AVERAGE TELEVISION POWER BY VINTAGE .....	79
Table 128. DISTRIBUTION OF TELEVISION SCREENS BY TYPE AND VINTAGE .....	80
Table 129. DISTRIBUTION OF TELEVISIONS BY ROOM TYPE .....	81
Table 130. AVERAGE PRIMARY TELEVISION ON-TIME HOURS PER DAY PER HOME BY STATE .....	81
Table 131. AVERAGE NUMBER OF SET-TOP BOXES PER HOME BY STATE .....	82
Table 132. PERCENTAGE OF HOMES WITH SET-TOP BOXES .....	82
Table 133. PERCENTAGE OF SET-TOP BOXES WITH DVR CAPABILITY BY STATE .....	83
Table 134. PERCENTAGE OF HOMES WITH GAMING SYSTEMS .....	83
Table 135. AVERAGE NUMBER OF GAMING SYSTEMS PER HOME .....	84

Table 136. AVERAGE NUMBER OF COMPUTERS PER HOME BY STATE .....	85
Table 137. PERCENTAGE OF HOMES WITH COMPUTERS BY STATE .....	85
Table 138. AVERAGE NUMBER OF AUDIO SYSTEMS PER HOME BY STATE .....	86
Table 139. AVERAGE NUMBER OF SUBWOOFERS PER HOME BY TYPE .....	86
Table 140. AVERAGE NUMBER OF OCCUPANTS PER HOME BY STATE .....	87
Table 141. AVERAGE NUMBER OF OCCUPANTS BY AGE CATEGORY BY STATE.....	87
Table 142. DISTRIBUTION OF HOMES BY OWNERSHIP TYPE AND STATE .....	88
Table 143. PERCENTAGE OF HOMES AS PRIMARY RESIDENCE BY STATE .....	88
Table 144. DISTRIBUTION OF HOUSEHOLD INCOME BY STATE .....	89
Table 145. DISTRIBUTION OF HOMES WITH ELECTRIC FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE .....	89
Table 146. DISTRIBUTION OF HOMES WITH GAS FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE .....	90
Table 147. AVERAGE HEATING THERMOSTAT SETPOINT BY STATE .....	90
Table 148. PERCENTAGE OF HOMES REPORTING A HEATING SETBACK BY STATE .....	91
Table 149. AVERAGE SIZE OF HEATING SETBACK BY STATE .....	91
Table 150. AVERAGE COOLING THERMOSTAT SETPOINT BY STATE.....	92
Table 151. PERCENTAGE OF HOMES REPORTING A COOLING THERMOSTAT SETUP BY STATE .....	92
Table 152. DISTRIBUTION OF THERMOSTATS BY TYPE AND STATE .....	93
Table 153. PERCENTAGE OF HOMES WITH AT LEAST ONE SMART POWER STRIP BY STATE .....	93
Table 154. DISTRIBUTION OF POWER STRIPS BY USE TYPE.....	94
Table 155. PERCENTAGE OF HOUSEHOLDS REPORTING GAS SERVICE BY STATE .....	94
Table 156. DISTRIBUTION OF WOOD USE AS HEATING FUEL BY STATE.....	95
Table 157. DISTRIBUTION OF PELLET FUEL USE BY STATE .....	95
Table 158. DISTRIBUTION OF OIL FUEL USE BY STATE .....	96
Table 159. DISTRIBUTION OF PROPANE FUEL USE BY STATE .....	96
Table 160. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT SELF-FUNDED CONSERVATION BY STATE .....	97
Table 161. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT USE OF UTILITY CONSERVATION PROGRAMS BY STATE .....	97
Table 162. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF CONSERVATION TAX CREDIT .....	98
Table 163. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF BOTH UTILITY AND TAX CREDIT CONSERVATION PROGRAMS .....	98
Table 164. PERCENT OF HOMES REPORTING HAVING COMPLETED AN ENERGY AUDIT IN THE LAST TWO YEARS	99
Table 165. PERCENTAGE OF HOUSEHOLDS WITH AN ELECTRIC VEHICLE .....	99
Table 166. PERCENTAGE OF HOUSEHOLDS WITH SOLAR PANELS .....	100
Table 167. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF SMART EQUIPMENT .....	100

Table 168. AVERAGE ANNUAL KWH PER HOME BY STATE.....	101
Table 169. AVERAGE WEATHER NORMALIZED KWH PER HOME BY STATE .....	101
Table 170. AVERAGE ELECTRIC EUI PER HOME BY HEATING FUEL TYPE AND STATE.....	102
Table 171. AVERAGE ESTIMATED ANNUAL ELECTRIC SPACE HEAT PER HOME BY STATE .....	102
Table 172. AVERAGE ANNUAL GAS USE PER HOME BY STATE.....	103
Table 173. AVERAGE WEATHER NORMALIZED GAS USE PER HOME BY STATE.....	103
Table 174. AVERAGE GAS EUI PER HOME BY HEATING FUEL AND STATE.....	104
Table 175. AVERAGE ESTIMATED GAS SPACE HEAT BY STATE .....	104
Table 176. AVERAGE ANNUAL ELECTRICITY AND GAS USE PER HOME BY STATE .....	105
Table 177. AVERAGE ELECTRICITY AND GAS EUI BY STATE .....	105
Table 178. AVERAGE WEATHER-NORMALIZED ELECTRICITY AND GAS EUI BY STATE.....	106
Table 179. AVERAGE ANNUAL OTHER FUEL USE PER HOME BY STATE .....	106
Table 180. AVERAGE EUI, OTHER FUEL USE .....	107
Table 181. SUMMARY STATISTICS BY EUI QUANTILES.....	107
Table 182. DISTRIBUTION OF ELECTRICALLY HEATED HOMES BY VINTAGE AND STATE .....	108
Table 183. DISTRIBUTION OF ELECTRICALLY HEATED HOMES BY GROUND CONTACT TYPE AND STATE.....	109
Table 184. AVERAGE CONDITIONED FLOOR AREA BY STATE, ELECTRICALLY HEATED HOMES.....	109
Table 185. AVERAGE CONDITIONED FLOOR AREA BY VINTAGE AND STATE, ELECTRICALLY HEATED HOMES .....	110
Table 186. DISTRIBUTION OF FRAME WALL INSULATION LEVELS, ELECTRICALLY HEATED HOMES .....	110
Table 187. PERCENTAGE OF ELECTRICALLY HEATED HOMES WITH BASEMENTS BY STATE .....	111
Table 188. PERCENTAGE OF ELECTRICALLY HEATED HOMES WITH FLOOR AREA OVER CRAWLSPACE BY STATE .....	111
Table 189. DISTRIBUTION OF FLOOR INSULATION, ELECTRICALLY HEATED HOMES .....	112
Table 190. DISTRIBUTION OF ATTIC INSULATION LEVELS, ELECTRICALLY HEATED HOMES .....	113
Table 191. DISTRIBUTION OF VAULT CEILING INSULATION LEVEL, ELECTRICALLY HEATED HOMES .....	113
Table 192. DISTRIBUTION OF WINDOW TYPES BY STATE, ELECTRICALLY HEATED HOMES.....	114
Table 193. AVERAGE NORMALIZED HEAT-LOSS RATE BY VINTAGE AND STATE, ELECTRICALLY HEATED HOMES .....	114
Table 194. AVERAGE HEAT-LOSS RATE BY VINTAGE AND STATE, ELECTRICALLY HEATED HOMES.....	115
Table 195. AVERAGE BLOWER DOOR AIR TIGHTNESS BY STATE, ELECTRICALLY HEATED HOMES .....	115
Table 196. AVERAGE HEATING THERMOSTAT SETPOINT BY STATE, ELECTRICALLY HEATED HOMES .....	116
Table 197. PERCENTAGE OF ELECTRICALLY HEATED HOMES REPORTING A HEATING SETBACK BY STATE.....	116
Table 198. AVERAGE WEATHER NORMALIZED KWH PER HOME BY STATE, ELECTRICALLY HEATED HOMES.....	117
Table 199. DISTRIBUTION OF PRIMARY HEATING SYSTEMS, ELECTRICALLY HEATED HOMES.....	117



**Table 1. DISTRIBUTION OF HOMES BY TYPE AND STATE**  
(Compare to Table 8 in 2011 RBSA)

Home Type	Percentage of Homes										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Single Family Detached	89.2%	4.7%	84.8%	5.4%	88.7%▼	3.8%	86.2%▼	3.5%	87.3%▼	2.2%	967
Duplex, Triplex, or Fourplex	9.9%	4.8%	13.8%	5.4%	8.1%▲	3.2%	11.2%▲	3.2%	10.3%▲	2.0%	111
Townhome or Rowhome	0.8%▼	5.2%	1.4%	2.8%	3.2%	2.7%	2.6%	1.7%	2.4%	1.1%	22
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

[BACK TO REPORT](#)



**Table 2. DISTRIBUTION OF HOMES BY VINTAGE AND STATE**  
(Compare to Table 9 in 2011 RBSA)

Home Type	Percentage of Homes										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1951	15.9%	5.7%	17.6%	5.6%	30.8%	5.7%	21.5%	3.7%	23.3%	2.6%	276
1951-1960	5.0%	3.8%	7.3%	4.0%	8.5%	3.7%	8.0%	2.3%	7.7%	1.6%	102
1961-1970	7.5%	4.4%	8.0%	4.1%	8.6%▼	3.4%	10.3%	3.0%	9.3%▼	1.9%	90
1971-1980	20.0%	6.2%	15.2%	5.5%	14.4%	4.1%	13.5%	3.3%	14.7%	2.2%	159
1981-1990	9.2%	4.7%	18.4%	6.0%	7.5%	3.4%	12.3%	3.4%	10.9%	2.1%	101
1991-2000	15.0%	5.7%	11.3%	5.1%	15.5%	4.3%	13.7%	3.3%	14.2%	2.2%	140
2001-2010	22.5%	6.5%	18.8%	6.0%	10.0%	3.4%	15.6%	3.3%	15.0%	2.2%	161
Post 2010	5.0%	3.9%	3.5%	3.0%	4.6%	2.4%	5.0%	1.7%	4.8%	1.2%	59
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,088

[BACK TO REPORT](#)



**Table 3. DISTRIBUTION OF HOMES BY GROUND CONTACT TYPE AND STATE**  
(Compare to Table 10 in 2011 RBSA)

Ground Contact Type	Percentage of Homes										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
> 90% Conditioned Basement	23.2%	5.6%	38.7%	5.5%	11.1%	3.6%	20.9%	2.9%	19.4%	9.0%	254
> 90% Crawlspace	43.0%	5.6%	37.4%▲	5.4%	52.6%	4.3%	51.0%	3.0%	49.6%	9.3%	512
> 90% Slab	5.8%	3.4%	9.9%	4.2%	13.0%	3.8%	14.5%	3.1%	12.6%	7.2%	130
> 90% Unconditioned Basement	5.8%	3.4%	4.5%	2.9%	4.4%	2.6%	2.1%	0.9%	3.4%	5.2%	47
Adiabatic Space Below	0.8%	1.3%	0.0%	0.0%	1.4%	1.6%	0.0%▼	0.0%	0.5%	2.1%	4
Mixed Basement and Slab	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1
Mixed Conditioned Basement and Slab	2.5%	2.3%	1.4%	1.6%	2.8%	2.2%	0.6%	0.3%	1.6%	3.6%	23
Mixed Crawlspace and Conditioned Basement	8.3%	4.0%	4.0%▼	2.9%	3.5%▼	2.3%	2.6%▼	1.2%	3.7%	5.5%	40
Mixed Crawlspace and Room Over Garage	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.2%▼	0.3%	0.1%▼	0.3%	2
Mixed Crawlspace and Slab	10.7%▲	4.3%	4.0%	2.9%	9.3%	3.4%	8.0%	2.6%	8.5%	6.6%	82
Other	0.0%	0.0%	0.0%	0.0%	1.9%	1.7%	0.1%	0.2%	0.6%	1.7%	5
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 4. AVERAGE CONDITIONED FLOOR AREA BY STATE**  
(Compare to Table 11 in 2011 RBSA)

State	Conditioned Floor Area (sq. ft.)		
	Mean	EB	n
ID	2,156.3	147.8	121
MT	2,075.1	145.9	129
OR	1,985.0	127.4	282
WA	1,961.2	81.5	568
Region	2,001.2	60.0	1,100

**Table 5. AVERAGE CONDITIONED FLOOR AREA BY VINTAGE AND STATE**  
(Compare to Table 12 in 2011 RB SA)

Vintage	Conditioned Floor Area (sq. ft.)										n
	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Pre 1951	1,795.3	101.4	1,857.4	81.2	2,084.7	168.4	1,602.6▼	73.3	1,788.2▼	63.5	276
1951-1960	1,630.1▼	132.9	1,908.0▼	60.0	1,544.9	84.9	1,585.8▼	70.1	1,599.5▼	45.4	102
1961-1970	1,882.7	141.5	1,888.0▼	104.4	1,909.0	99.4	1,885.3▼	87.7	1,892.2▼	55.2	90
1971-1980	2,136.2	112.0	2,415.5▲	141.4	2,218.5▲	88.9	1,805.1▼	92.8	2,011.0▲	55.9	159
1981-1990	1,982.2	124.2	2,079.1	157.9	1,537.0▼	63.5	2,026.0	98.6	1,870.4	53.9	101
1991-2000	2,447.8	248.9	2,423.8	178.4	1,973.2▼	113.1	2,149.7	66.3	2,153.7	57.4	140
2001-2010	2,370.5	144.9	2,220.3	145.8	2,308.4▲	138.2	2,304.3	77.1	2,308.9	59.6	161
Post 2010	2,820.4	192.7	1,654.8	126.3	1,898.7	120.6	2,323.6	43.9	2,228.0	47.7	59
All Vintages	2,145.0	50.4	2,074.4▼	43.5	1,934.3	39.0	1,957.4▼	27.2	1,982.3▼	19.4	1,088

**Table 6. DISTRIBUTION OF HOMES BY BUILDING HEIGHT AND STATE**  
(Compare to Table 13 in 2011 RB SA)

Building Height	Percentage of Homes										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
1 Story	58.7%	7.5%	48.9%	7.3%	38.4%▼	5.5%	46.4%	4.6%	45.8%▼	3.0%	536
1.5 Stories	14.0%	5.5%	20.0%	5.6%	13.5%	4.3%	11.4%▼	2.6%	12.9%	1.9%	165
2 Stories	23.2%	6.5%	29.4%	6.4%	38.7%▲	5.9%	34.9%	4.5%	34.1%▲	3.0%	324
2.5 Stories	4.1%	3.6%	1.7%	3.5%	8.5%▲	3.9%	5.9%▲	1.9%	6.2%▲	1.5%	62
3+ Stories	0.0%	0.0%	0.0%	0.0%	1.0%	2.2%	1.5%	1.2%	1.0%	0.7%	13
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 7. AVERAGE NUMBER OF BEDROOMS PER HOME BY STATE**  
**(Compare to Table 14 in 2011 RBSA)**

State	Bedrooms per Home		
	Mean	EB	n
ID	3.1	0.2	121
MT	3.0	0.2	129
OR	2.9	0.1	282
WA	2.9▼	0.1	568
Region	3.0▼	0.1	1,100

**Table 8. AVERAGE NUMBER OF BATHROOMS PER HOME BY STATE**  
**(Compare to Table 15 in 2011 RBSA)**

State	Bathrooms per Home		
	Mean	EB	n
ID	2.3	0.1	121
MT	2.1	0.1	129
OR	2.3	0.1	282
WA	2.2	0.1	568
Region	2.2	0.1	1,100

**Table 9. AVERAGE ROOM AREAS BY ROOM TYPE**  
**(Compare to Table 16 in 2011 RBSA)**

Room Type	Room Areas (sq. ft.)		
	Mean	EB	n
Bathroom	62.4	2.0	1,085
Bedroom	163.5	6.6	1,094
Closet	44.8 ▼	0.9	447
Dining Room	156.5 ▲	0.6	532
Family Room	276.6 ▼	1.9	476
Garage	491.9 ▼	2.4	324
Hall	77.7 ▼	2.2	984
Kitchen	185.7 ▲	1.1	1,064
Laundry	77.2 ▼	0.6	695
Living Room	298.5 ▲	2.5	980
Office	162.5 ▲	1.3	366
Other	299.3 ▲	5.1	424
All Room Types	171.5 ▲	1.3	1,100

**Table 10. DISTRIBUTION OF FRAME WALL INSULATION LEVELS BY FRAMING TYPE**  
(Compare to Table 17 in 2011 RBSA)

Wall Framing Type	Frame Wall Insulation Levels												n
	R0		R1-R10		R11-R16		R17-R22		>R22		All Insulation Levels		
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Framed 2x4	9.0%▼	1.9%	37.6%▲	3.3%	52.8%▼	3.3%	0.5%▼	0.5%	0.1%	0.5%	52.2%▼	3.5%	493
Framed 2x6	2.5%	1.4%	5.1%	1.7%	20.6%▲	2.8%	71.2%▼	3.1%	0.6%▼	0.5%	46.6%▲	3.5%	421
Framed 2x8	0.0%	0.0%	1.9%	2.0%	0.0%	0.0%	0.0%	0.0%	98.1%▲	0.6%	1.7%	1.5%	8
Framed (Unknown)	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2.0%	2.9%	3
Alternative	13.6%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	86.4%	0.0%	1.5%	1.7%	4
All Frame Types	6.2%▼	1.6%	22.0%▲	2.8%	36.5%▼	3.4%	34.0%	3.2%	1.2%	0.7%	37.2%▼	1.8%	891

**Table 11. DISTRIBUTION OF WALL FRAMING TYPES BY VINTAGE**  
(Compare to Table 18 in 2011 RBSA)

Vintage	Wall Framing Types								
	2x4		2x6		2x8		Alternative		n
	%	EB	%	EB	%	EB	%	EB	
Pre 1981	81.6% ▼	2.5%	16.2% ▲	2.4%	0.1% ▼	0.3%	0.1%	0.4%	607
1981-1990	53.7% ▼	3.0%	45.6% ▲	3.0%	0.4% ▼	0.7%	0.3%	0.8%	97
1991-2000	14.3%	1.9%	84.5%	1.9%	0.7%	0.6%	0.0%	0.0%	140
2001-2010	5.1% ▼	1.6%	94.0% ▲	1.4%	0.5%	0.6%	0.0%	0.0%	159
Post 2010	1.8%	0.7%	87.3%	1.9%	10.0%	2.6%	0.9%	1.6%	56
All Housing Vintages	54.7% ▼	3.1%	43.0% ▲	3.1%	1.6%	1.2%	1.1%	1.6%	1,059

**Table 12. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE**  
(Compare to Table 19 in 2011 RBSA)

Vintage	Wall Insulation Levels										n
	R0		R1-R10		R11-R16		R17-R22		>R22		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	15.7%	2.5%	33.1%▲	3.1%	39.9%	3.4%	11.0%▼	2.2%	0.3%▼	0.3%	500
1981-1990	1.8%▼	0.6%	17.7%▲	2.7%	39.3%▼	3.3%	40.9%▲	3.5%	0.3%	0.6%	87
1991-2000	0.0%	0.0%	6.7%▲	1.6%	27.5%▼	3.2%	64.3%▲	3.3%	1.5%	0.6%	122
2001-2010	1.0%	0.9%	2.4%	0.9%	28.6%▲	3.0%	66.8%▼	3.1%	1.2%▼	0.6%	150
Post 2010	0.0%	0.0%	0.0%	0.0%	20.2%	2.0%	66.2%	2.8%	13.6%	2.6%	55
All Housing Vintages	9.4%▲	2.0%	21.8%▲	2.8%	34.6%▲	3.4%	32.8%▼	3.2%	1.4%▼	0.7%	914

[BACK TO REPORT](#)



**Table 13. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, IDAHO**  
(Compare to Table 20 in 2011 RBSA)

Vintage	Wall Insulation Levels, Idaho										n
	R0		R1-R10		R11-R16		R17-R22		>R22		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	26.7%	8.5%	30.9%▲	8.7%	33.3%▼	8.8%	9.1%	6.0%	0.0%	0.0%	39
1981-1990	0.0%	0.0%	30.6%	11.1%	20.4%▼	12.3%	49.0%▲	10.1%	0.0%	0.0%	9
1991-2000	0.0%	0.0%	18.1%	11.8%	33.3%	10.7%	48.6%▼	10.2%	0.0%	0.0%	12
2001-2010	0.0%	0.0%	0.0%	0.0%	42.8%	9.5%	57.2%	9.3%	0.0%	0.0%	23
Post 2010	0.0%	0.0%	0.0%	0.0%	32.6%	13.9%	67.4%	10.2%	0.0%	0.0%	6
All Housing Vintages	12.3%	6.3%	19.4%▲	7.3%	35.1%	8.6%	33.3%	8.5%	0.0%	0.0%	89

**Table 14. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, MONTANA**  
(Compare to Table 21 in 2011 RB SA)

Vintage	Wall Insulation Levels, Montana										
	R0		R1-R10		R11-R16		R17-R22		>R22		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	14.4%	5.9%	40.0%▲	8.3%	29.9%▼	7.9%	14.3%▼	6.7%	1.4%	7.1%	48
1981-1990	13.8%	7.2%	23.8%	8.2%	28.7%▼	8.4%	33.7%▼	8.6%	0.0%	0.0%	22
1991-2000	0.0%	0.0%	9.2%	16.9%	11.8%▼	18.6%	69.7%	8.6%	9.2%	16.9%	10
2001-2010	0.0%	0.0%	6.5%	14.5%	25.3%▲	8.5%	68.3%▼	7.7%	0.0%	0.0%	20
Post 2010	0.0%	0.0%	0.0%	0.0%	33.3%	35.3%	66.7%	16.3%	0.0%	0.0%	3
All Housing Vintages	12.0%	5.6%	25.7%▲	7.2%	25.3%▼	7.3%	35.3%	7.9%	1.7%▼	3.5%	103

**Table 15. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, OREGON**  
(Compare to Table 22 in 2011 RB SA)

Vintage	Wall Insulation Levels, Oregon										n
	R0		R1-R10		R11-R16		R17-R22		>R22		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	16.5%▼	5.7%	41.7%▲	7.0%	33.3%▼	6.5%	8.0%	3.4%	0.5%	2.4%	128
1981-1990	2.7%	1.7%	16.1%▲	21.8%	33.6%▼	7.1%	46.6%	8.0%	1.0%	2.0%	16
1991-2000	0.0%	0.0%	0.6%	2.0%	43.3%▲	7.4%	55.0%▼	7.2%	1.1%	1.3%	41
2001-2010	1.9%	4.7%	0.0%	0.0%	42.3%▲	7.8%	52.8%▼	7.0%	3.0%	1.9%	33
Post 2010	0.0%	0.0%	0.0%	0.0%	11.0%	2.8%	52.3%	7.0%	36.7%	8.5%	16
All Housing Vintages	11.4%	4.9%	28.8%▲	6.7%	32.5%	6.6%	24.4%▼	5.6%	2.9%	2.1%	234



**Table 16. DISTRIBUTION OF WALL INSULATION LEVELS BY HOME VINTAGE, WASHINGTON**  
(Compare to Table 23 in 2011 RB SA)

Vintage	Wall Insulation Levels, Washington										n
	R0		R1-R10		R11-R16		R17-R22		>R22		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	12.6%▼	3.1%	27.8%▲	4.0%	46.7%▼	5.0%	12.8%▲	3.7%	0.1%	0.8%	285
1981-1990	0.0%	0.0%	14.3%▲	3.3%	49.8%	5.2%	35.9%	5.2%	0.0%	0.0%	40
1991-2000	0.0%	0.0%	7.0%▲	2.6%	18.7%	4.2%	73.1%▼	4.4%	1.1%	2.6%	59
2001-2010	0.8%	2.4%	4.0%	1.7%	17.2%▲	3.9%	77.4%▼	3.8%	0.7%▼	2.3%	74
Post 2010	0.0%	0.0%	0.0%	0.0%	21.5%	3.0%	74.8%	2.9%	3.7%	2.1%	30
All Housing Vintages	7.2%▼	2.3%	17.7%▲	3.4%	36.9%	4.9%	37.3%	4.8%	0.8%	0.7%	488

**Table 17. DISTRIBUTION OF MASONRY WALL INSULATION LEVELS BY HOME VINTAGE**  
(Compare to Table 24 in 2011 RB SA)

Vintage	Masonry Wall Insulation Levels										n
	None		R1-R9		R10-R15		R16-R20		R21+		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	83.6%▲	4.8%	7.1%	3.3%	8.5%	4.2%	0.7%▼	0.5%	0.1%▼	0.5%	301
1981-1990	36.6%▼	3.7%	7.0%▲	0.9%	47.9%▲	3.1%	8.5%▼	3.3%	0.0%	0.0%	22
1991-2000	80.9%▲	2.6%	0.3%	0.0%	8.2%▼	2.3%	9.2%▼	2.1%	1.4%	2.0%	35
2001-2010	63.5%▲	3.4%	3.4%	6.5%	11.4%▼	3.2%	19.9%▼	2.5%	1.7%▼	3.6%	29
Post 2010	22.4%	0.0%	0.0%	0.0%	11.9%	0.0%	65.7%	0.0%	0.0%	0.0%	7
All Housing Vintages	77.6%▲	5.0%	5.5%	3.1%	11.6%	4.6%	5.1%▼	1.8%	0.3%	0.4%	394

**Table 18. DISTRIBUTION OF OBSERVED WALL SHEATHING INSULATION BY FRAMING TYPE**  
(Compare to Table 25 in 2011 RBSA)

Framing Type	Observed Wall Sheathing Insulation Levels												
	0.5 Inches		0.75 Inches		1 Inch		2 Inch		3 Inch		None		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Framed 2x4	1.0%▼	0.5%	0.4%▼	1.4%	0.4%▼	0.4%	0.6%	0.4%	0.0%	0.0%	97.6%▼	0.7%	493
Framed 2x6	0.4%▼	0.6%	0.2%▼	0.5%	0.6%▼	0.4%	0.2%▼	0.5%	0.0%	0.0%	98.7%▼	0.5%	421
Framed 2x8	0.0%	0.0%	0.0%	0.0%	46.7%	0.0%	0.0%	0.0%	0.0%	0.0%	53.3%	0.0%	8
Framed (Unknown)	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	3
Alternative	0.0%	0.0%	0.0%	0.0%	45.9%	0.0%	0.0%	0.0%	16.0%	0.0%	38.1%	0.0%	4
Masonry	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	38
Masonry (Basement)	0.0%	0.0%	0.0%	0.0%	0.2%	0.2%	0.0%	0.0%	0.0%	0.0%	99.7%	0.2%	367
ICF	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	5
SIP	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	3
Log	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	9
All Framing Types	0.4%▼	0.4%	0.1%▼	0.3%	0.6%▼	0.5%	0.2%	0.2%	0.0%▲	0.2%	98.5%▼	0.6%	999

**Table 19. PERCENTAGE OF HOMES WITH BASEMENTS BY STATE**  
(Compare to Table 26 in 2011 RBSA)

State	Homes with Basements		
	%	EB	n
ID	41.3%	7.4%	121
MT	46.9%	7.2%	128
OR	25.7%	5.4%	281
WA	27.6% ▼	3.4%	566
Total	30.1%	2.6%	1,096

**Table 20. PERCENTAGE OF BASEMENTS THAT ARE CONDITIONED BY STATE**  
**(Compare to Table 27 in 2011 RBSA)**

State	Conditioned Basements		
	%	EB	n
ID	94.0%	5.6%	50
MT	97.1%	4.7%	62
OR	91.6%	5.4%	53
WA	94.7%	2.8%	207
Total	93.8%	2.3%	372

**Table 21. DISTRIBUTION OF BASEMENT SLAB INSULATION BY INSULATION LEVEL**  
**(Compare to Table 28 in 2011 RBSA)**

Insulation Level	Basement Perimeter Slab Insulation		
	%	EB	n
2 inches	0.5%	1.1%	2
None	99.5% ▲	0.6%	272
Total	100.0%	0.0%	274

**Table 22. PERCENTAGE OF HOMES WITH FLOOR AREA OVER CRAWLSPACE BY STATE**  
(Compare to Table 29 in 2011 RBSA)

State	Homes with Floor Area over CrawlSpace		
	%	EB	n
ID	61.1%	7.3%	121
MT	48.3%	7.2%	129
OR	75.5%	5.3%	282
WA	64.3%	4.3%	568
Total	66.2%	2.9%	1,100

**Table 23. DISTRIBUTION OF FLOOR INSULATION BY HOME VINTAGE**  
(Compare to Table 30 in 2011 RBSA)

Vintage	Floor Insulation Levels																
	None		R1-R3		R4-R10		R11-R15		R16-R22		R23-R27		R28-R35		R36+		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	n
Pre 1981	53.7%▲	3.7%	15.1%▲	2.9%	8.0%▲	2.3%	2.1%▼	0.9%	11.5%▼	2.6%	6.2%▼	1.5%	2.9%▼	1.6%	0.5%	0.6%	463
1981-1990	33.8%	2.1%	19.1%▲	3.6%	9.0%▲	2.6%	0.0%	0.0%	23.8%▼	3.4%	10.5%▲	2.2%	3.3%	2.2%	0.5%▲	1.0%	71
1991-2000	20.6%▲	2.7%	4.9%	1.2%	10.1%	2.9%	0.0%	0.0%	24.5%▼	3.5%	20.3%▼	2.5%	16.4%	2.7%	3.2%▲	1.6%	101
2001-2010	16.0%▲	1.4%	9.3%	2.4%	1.1%	1.1%	0.0%	0.0%	22.8%▼	3.3%	15.3%▼	2.3%	25.3%▼	2.9%	10.1%▲	2.7%	102
Post 2010	15.9%	1.6%	1.7%	2.7%	8.3%	8.8%	0.0%	0.0%	16.0%	2.9%	17.3%	1.5%	19.7%	1.9%	21.0%	3.0%	42
All Housing Vintages	40.2%▲	3.4%	12.9%▲	2.8%	7.9%▲	2.3%	1.1%▼	0.7%	16.0%▼	3.0%	10.1%▼	2.0%	9.1%	2.2%	2.7%▲	1.3%	779

**Table 24. PERCENTAGE OF CRAWLSPACES WITH INSULATED WALLS BY STATE**  
**(Compare to Table 31 in 2011 RBSA)**

State	Insulated Crawlspace Walls		
	%	EB	n
ID	20.0%	8.7%	58
MT	63.7%▲	11.0%	51
OR	10.6%	4.8%	169
WA	3.9%	1.9%	275
Total	11.8%	2.2%	553

**Table 25. PERCENTAGE OF HOMES WITH ATTICS BY STATE**  
**(Compare to Table 32 in 2011 RBSA)**

State	Homes with Attics		
	%	EB	n
ID	95.0%	3.3%	121
MT	87.7%	4.9%	129
OR	90.0%	3.7%	282
WA	92.5%	2.5%	568
Total	91.8%	1.8%	1,100

**Table 26. DISTRIBUTION OF ATTIC INSULATION LEVELS**  
(Compare to Table 33 in 2011 RB SA)

Insulation Level	Attic Insulation Level		
	%	EB	n
R0	2.1%	1.0%	20
R1 - R10	27.9%▲	3.2%	186
R11 - R15	8.3%	2.0%	66
R16 - R20	6.7%▼	1.9%	54
R21 - R25	12.1%	2.4%	91
R26 - R30	8.1%▼	2.0%	64
R31 - R40	18.8%▼	2.7%	160
R41 - R50	11.1%▲	2.1%	100
>R50	5.0%	1.3%	46
Total	100.0%	0.0%	787

[BACK TO REPORT](#)



**Table 27. PERCENTAGE OF HOMES WITH VAULT CEILINGS BY STATE**  
(Compare to Table 35 in 2011 RB SA)

State	Homes with Vault Ceilings		
	%	EB	n
ID	38.9%▲	7.3%	121
MT	46.0%▲	6.6%	129
OR	39.3%▲	5.8%	282
WA	35.2%▲	4.4%	568
Total	37.6%▲	3.0%	1,100

**Table 28. PERCENTAGE OF HOMES WITH ROOF DECK CEILINGS BY STATE**  
(Compare to Table 36 in 2011 RBSA)

State	Homes with Roof Deck Ceilings		
	%	EB	n
ID	0.0%	0.0%	121
MT	0.7%	1.1%	129
OR	4.7%	2.8%	282
WA	2.4%	1.2%	568
Total	2.6%	1.0%	1,100

**Table 29. DISTRIBUTION OF VAULT CEILING INSULATION LEVEL**  
(Compare to Table 37 in 2011 RBSA)

Insulation Level	Vault Ceiling Insulation Level		
	%	EB	n
R0	14.4% ▲	4.8%	20
R1-R15	25.0%	9.6%	25
R16-R20	18.1%	8.9%	15
R21-R25	8.7%	7.0%	9
R26-R30	0.2% ▼	1.4%	1
R31-R40	25.1% ▲	6.0%	27
R41-R50	8.5%	5.6%	9
Total	100.0%	0.0%	106

**Table 30. DISTRIBUTION OF DOOR TYPES**  
(Compare to Table 39 in 2011 RBSA)

Door Type	Doors		
	%	EB	n
Garage Door with Glazing	0.4%	1.9%	1
Metal	9.7%	1.8%	195
Metal with Glazing	8.1% ▼	1.7%	157
Other	0.2%	0.2%	5
Other with Glazing	1.0%	0.7%	18
Wood/Fiberglass	31.0%	3.0%	594
Wood/Fiberglass with Glazing	49.7%	3.2%	686
Total	100.0%	0.0%	1,062

**Table 31. DISTRIBUTION OF WINDOW TYPES BY STATE**  
(Compare to Table 40 in 2011 RBSA)

Window Type	Windows										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Metal Single Glazed	2.4%	2.4%	1.4%	1.9%	2.0%	1.5%	3.3%	1.6%	2.6%	1.0%	140
Metal Double Glazed	6.7%	3.9%	3.1%	2.7%	10.7%	3.8%	9.2%▼	2.8%	8.9%▼	1.9%	221
Metal Triple Glazed	0.3%	3.0%	0.0%	0.0%	0.1%	1.8%	0.1%	0.9%	0.1%	0.3%	3
Wood/Vinyl/Fiberglass/Tile Single Glazed	7.3%	4.1%	7.6%	3.8%	20.1%▲	5.1%	6.4%	1.8%	10.7%	1.8%	247
Wood/Vinyl/Fiberglass/Tile Double Glazed	83.2%	5.6%	87.6%	4.6%	65.3%	5.8%	80.5%▲	3.5%	76.8%	2.6%	989
Wood/Vinyl/Fiberglass/Tile Triple Glazed	0.1%	1.8%	0.2%▼	1.1%	1.8%	1.6%	0.5%	0.7%	0.8%	0.6%	18
Other Double Glazed	0.0%	0.0%	0.0%	0.0%	0.0%	1.1%	0.0%	0.0%	0.0%	0.3%	1
All Window Types	13.2%	0.0%	6.4%	0.0%	29.9%	0.0%	50.6%	0.0%	100.0%	0.0%	1,100



**Table 32. PERCENTAGE OF HOMES WITH STORM WINDOWS BY STATE**  
**(Compare to Table 41 in 2011 RBSA)**

State	Homes with Storm Windows		
	%	EB	n
ID	7.5%	3.9%	121
MT	10.7%	4.3%	129
OR	6.7%	3.1%	282
WA	3.1%▼	1.1%	568
Total	5.3%▼	1.2%	1,100

**Table 33. WINDOW AREA TO FLOOR AREA RATIO BY PRESENCE OF BASEMENT**  
**(Compare to Table 42 in 2011 RBSA)**

Foundation Type	Ratio of Window to Floor Area		
	Mean	EB	n
Home with Basements	0.107▼	0.002	376
Home without Basements	0.123▼	0.002	724
All Homes	0.115▼	0.002	1,100

**Table 34. AVERAGE NORMALIZED HEAT-LOSS RATE BY VINTAGE AND STATE**  
(Compare to Table 43 in 2011 RB SA)

Vintage	Heat Loss Rate (UA/conditioned sq. ft.) per Home										n
	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Pre 1981	0.393	0.024	0.379▲	0.022	0.472▲	0.029	0.402	0.018	0.420▲	0.013	598
1981-1990	0.368▲	0.016	0.289	0.015	0.394▲	0.016	0.338▲	0.014	0.357▲	0.008	96
1991-2000	0.323▲	0.016	0.259▲	0.013	0.285▲	0.011	0.259▲	0.006	0.275▲	0.005	132
2001-2010	0.239▲	0.011	0.284▲	0.012	0.260▲	0.008	0.232▲	0.005	0.245▲	0.004	158
Post 2010	0.218	0.021	0.345	0.021	0.220	0.008	0.219	0.003	0.225	0.004	57
All Vintages	0.308	0.007	0.309▲	0.007	0.326▼	0.007	0.290▼	0.005	0.305▼	0.003	1,041

**Table 35. AVERAGE HEAT-LOSS RATE BY VINTAGE AND STATE**  
(Compare to Table 44 in 2011 RB SA)

Vintage	Heat Loss Rate (UA) per Home										n
	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Pre 1981	717.9	50.7	715.6▲	44.9	864.9▲	68.1	646.0	33.4	725.3	27.3	598
1981-1990	710.1▲	39.9	551.4	46.6	568.5	25.8	672.5▲	40.3	637.0▲	21.5	96
1991-2000	737.0▲	66.0	569.9	43.0	534.1▲	31.3	540.1▲	19.5	566.1▲	15.9	132
2001-2010	537.4	28.9	611.2▲	30.5	580.0▲	33.8	518.7▲	18.0	545.4▲	14.0	158
Post 2010	553.8	35.8	571.7	48.3	397.1	18.8	502.3	9.3	478.9	8.3	57
All Vintages	651.2▲	19.1	606.4▲	18.0	588.9▼	17.4	575.5▼	11.6	591.7▼	8.3	1,041

**Table 36. AVERAGE BLOWER DOOR AIR FLOW BY STATE**  
(Compare to Table 45 in 2011 RBSA)

State	Blower Door Air Flow (CFM @ 50 Pa)		
	Mean	EB	n
ID	1,765.9	140.2	79.0
MT	1,903.8	195.9	85.0
OR	2,605.6	214.1	152.0
WA	2,189.8 ▼	142.0	340.0
Region	2,240.0 ▼	98.4	656.0

**Table 37. AVERAGE BLOWER DOOR AIR TIGHTNESS BY STATE**  
(Compare to Table 46 in 2011 RBSA)

State	Blower Door Air Tightness (ACH50)		
	Mean	EB	n
ID	6.5	0.6	79
MT	7.1 ▼	0.7	85
OR	10.7	1.0	152
WA	8.7 ▼	0.4	340
Region	8.9 ▼	0.4	656

[BACK TO REPORT](#)



**Table 38. AVERAGE BLOWER DOOR AIR TIGHTNESS BY HOME VINTAGE**  
**(Compare to Table 47 in 2011 RBSA)**

Vintage	Blower Door Air Tightness (ACH50)		
	Mean	EB	n
Pre 1951	13.0 ▼	0.1	132
1951-1960	9.8 ▼	0.1	50
1961-1970	10.7 ▲	0.1	49
1971-1980	8.3 ▼	0.0	97
1981-1985	10.2 ▲	0.1	31
1986-1990	8.8 ▲	0.0	33
1991-1995	7.2 ▼	0.0	46
1996-2000	6.9 ▼	0.0	54
2001-2005	5.6 ▼	0.0	58
2006-2010	5.8 ▼	0.0	59
Post 2010	4.9 ▼	0.0	39
All Vintages	8.3 ▼	0.0	648

[BACK TO REPORT](#) ➤

**Table 39. AVERAGE INFILTRATION RATE BY STATE, ACH50 DIVIDED BY 20**  
**(Compare to Table 48 in 2011 RBSA)**

State	Infiltration Rate (ACH50/20)		
	Mean	EB	n
ID	0.33	0.03	79
MT	0.35 ▼	0.03	85
OR	0.54	0.05	152
WA	0.43 ▼	0.02	340
Region	0.44 ▼	0.02	656

**Table 40. DISTRIBUTION OF PRIMARY HEATING SYSTEMS**  
**(Compare to Table 50 in 2011 RBSA)**

Heating System Type	Primary Heating Systems		
	%	EB	n
Air Source Heat Pump	11.3%	1.8%	131
Boiler	2.5% ▼	0.8%	42
Electric Baseboard and Wall Heaters	9.9%	2.0%	119
Furnace	57.2%	3.0%	568
GeoThermal Heat Pump	0.7%	0.4%	9
Mini-split HP	3.5% ▲	1.1%	52
Other Zonal Heat	4.4%	1.1%	62
Plug-In Heaters	2.9% ▲	1.2%	28
Stove/Fireplace	7.5% ▼	1.4%	101
Total	100.0%	0.0%	1,100

[BACK TO REPORT](#)



**Table 41. DISTRIBUTION OF FUEL CHOICE FOR PRIMARY HEATING SYSTEMS BY STATE**  
**(Compare to Table 51 in 2011 RBSA)**

Fuel Type	Fuel Choice (Primary System)										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Electric	22.4%	6.4%	16.9%	5.7%	33.2%	5.2%	42.0%	4.4%	35.2%	2.8%	429
Gas	63.6%	7.2%	66.6%	6.4%	58.2%▲	5.4%	52.2%	4.4%	56.4%▲	2.9%	552
Oil/Kerosene	0.0%	0.0%	0.0%	0.0%	2.1%▼	2.8%	2.4%	1.3%	1.8%▼	0.9%	25
Pellets	0.8%	5.2%	1.4%	2.8%	1.5%	1.1%	0.0%	0.0%	0.7%▼	0.4%	11
Propane	4.1%	3.6%	8.4%	4.6%	0.4%▼	0.6%	1.3%	0.9%	1.9%	0.6%	25
Wood	9.1%	4.7%	6.7%▼	4.3%	4.5%▼	2.1%	2.1%▼	1.2%	4.0%▼	1.0%	58
Geothermal Well	0.0%	0.0%	0.0%	0.0%	0.1%	0.7%	0.0%	0.0%	0.0%	0.2%	1
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,098

[BACK TO REPORT](#)





**Table 42. DISTRIBUTION OF SECONDARY HEATING SYSTEMS BY SYSTEM TYPE**  
**(Compare to Table 52 in 2011 RBSA)**

Heating System Type	Secondary Heating Systems		
	%	EB	n
Air Handler	0.2%	0.5%	2
Air Source Heat Pump	4.8%	1.8%	39
Boiler	0.2% ▼	0.2%	4
Electric Baseboard and Wall Heaters	8.1% ▼	2.1%	87
Furnace	5.7% ▲	1.8%	64
Mini-split HP	1.2%	0.9%	13
Other Zonal Heat	32.7%	3.6%	350
Packaged AC	0.1%	0.7%	1
Packaged HP	0.2%	0.4%	3
Stove/Fireplace	46.7% ▼	3.9%	467
Water Source Heat Pump	0.1%	0.4%	2
Total	100.0%	0.0%	732

**Table 43. DISTRIBUTION OF FUEL CHOICE BY SECONDARY HEATING SYSTEM AND STATE**  
(Compare to Table 53 in 2011 RBSA)

Fuel Type	Fuel Choice (Secondary Systems)										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Electric	51.4%	9.8%	46.4%▲	9.6%	53.1%	8.1%	45.1%	5.3%	48.4%▲	3.9%	439
Gas	28.7%	9.1%	18.9%	7.6%	18.7%	6.5%	24.1%▲	4.7%	22.7%▲	3.3%	206
Oil/Kerosene	0.8%	6.0%	0.0%	0.0%	0.6%	1.0%	0.5%	0.7%	0.6%	0.5%	10
Propane	3.7%	4.7%	8.4%	5.9%	3.4%	3.2%	3.2%	1.4%	3.6%	1.3%	44
Wood (cord)	13.3%	7.2%	24.5%	8.4%	22.4%▲	7.1%	26.7%▲	4.9%	23.5%▲	3.4%	246
Wood (pellets)	2.1%▼	5.1%	1.8%▼	4.5%	1.7%▼	2.7%	0.4%▼	0.5%	1.1%▼	0.8%	14
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	731

**Table 44. DISTRIBUTION OF FUEL CHOICE, FORCED AIR FURNACES**  
(Compare to Table 54 in 2011 RBSA)

Fuel Type	Fuel Choice (Forced Air Furnaces)		
	%	EB	n
Electric	10.2%	2.2%	65
Gas	84.2%	2.6%	512
Oil/Kerosene	3.3%▼	1.4%	31
Propane	2.3%	0.9%	19
Total	100.0%	0.0%	628

**Table 45. DISTRIBUTION OF FUEL CHOICE, BOILERS**  
(Compare to Table 55 in 2011 RBSA)

Fuel Type	Fuel Choice (Boilers)		
	%	EB	n
Electric	17.0%	1.7%	4
Natural Gas	79.8%	2.5%	37
Oil/Kerosene	1.2%	2.2%	2
Propane	1.4%	2.7%	2
Unknown	0.6%	3.5%	1

**Table 46. DISTRIBUTION OF FUEL CHOICE, COMBUSTION HEATING STOVES**  
(Compare to Table 56 in 2011 RBSA)

Fuel Type	Fuel Choice (Combustion Stoves)		
	%	EB	n
Gas	20.5%	8.1%	25
Pellets	5.4%	3.2%	14
Propane	2.9% ▼	2.2%	7
Wood	71.2% ▲	8.4%	105
Total	100.0%	0.0%	147

**Table 47. AVERAGE GAS FURNACE EFFICIENCY (AFUE) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE AND STATE**  
(Compare to Table 57 in 2011 RB SA)

Vintage	Efficiency (AFUE)										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1990	78.0%▲	0.1%	80.0%▼	0.0%	82.7%▲	1.0%	0.0%	0.0%	81.3%▲	0.6%	14
1990-1999	86.6%▲	0.3%	83.9%	0.2%	82.9%▲	0.1%	81.5%▼	0.1%	82.8%▼	0.1%	91
2000-2006	86.8%▲	0.2%	85.5%▲	0.2%	86.6%▲	0.2%	81.8%▼	0.1%	84.3%▲	0.1%	97
2007-2014	91.9%▲	0.1%	91.3%▲	0.1%	92.0%▼	0.2%	89.8%▲	0.2%	90.9%▲	0.1%	117
Post 2014	89.6%	0.2%	94.6%	0.2%	96.2%	0.0%	93.1%	0.3%	93.8%	0.1%	20
Vintage Unknown	72.6%	0.2%	84.0%	1.0%	84.4%	0.3%	81.7%	0.1%	81.7%	0.1%	124
All Vintages	84.6%▲	0.1%	86.0%▲	0.2%	87.3%▲	0.2%	85.1%▲	0.1%	85.9%▲	0.1%	461

BACK TO REPORT



**Table 48. DISTRIBUTION OF GAS FURNACE EFFICIENCY (AFUE) FOR PRIMARY SYSTEMS BY STATE**  
(Compare to Table 58 in 2011 RB SA)

Furnace Efficiency	Percentage of Homes										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 80%	7.9%	5.9%	7.3%	6.6%	7.9%	4.9%	3.4%▼	2.4%	5.6%▼	1.9%	33
80-89%	41.1%	10.2%	42.7%	9.8%	36.8%▼	8.6%	66.8%	6.1%	52.8%	4.2%	235
90-94%	31.6%	9.7%	28.1%	9.2%	26.7%	8.3%	9.5%▼	3.3%	18.8%▼	3.2%	98
> 94%	19.4%	8.3%	21.9%	8.6%	28.5%▲	8.5%	20.3%▲	5.5%	22.7%▲	3.9%	95
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	461

**Table 49. AVERAGE AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY EQUIPMENT VINTAGE**  
(Compare to Table 59 in 2011 RBSA)

Vintage	Efficiency (HSPF)		
	Mean	EB	n
1990-1999	7.9▲	0.1	11
2000-2006	7.4▼	0.1	22
2007-2014	8.4	0.1	57
Post 2014	9.8	0.4	17
Vintage Unknown	7.9	0.0	4
All Vintages	8.3▲	0.1	111

**Table 50. DISTRIBUTION OF AIR SOURCE HEAT PUMP EFFICIENCY (HSPF) FOR PRIMARY SYSTEMS BY STATE**  
(Compare to Table 60 in 2011 RBSA)

HSPF	Percentage of Homes									
	ID		MT		OR		WA		Region	
	%	EB	%	EB	%	EB	%	EB	%	EB
6.8-7.6	16.7%	105.2%	0.0%	0.0%	20.3%	28.4%	4.0%▼	4.6%	10.8%▼	9.5%
7.7-8.2	66.7%	49.6%	100.0%	0.0%	39.0%	29.4%	28.3%▲	7.4%	38.3%▲	10.8%
8.3-8.9	16.7%	105.2%	0.0%	0.0%	24.2%	27.0%	9.7%▼	4.6%	15.1%▼	9.2%
9.0+	0.0%	0.0%	0.0%	0.0%	16.5%	6.4%	58.0%▲	7.1%	35.8%▲	4.2%
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%
										111

**Table 51. PERCENTAGE OF HOMES WITH COOLING EQUIPMENT BY COOLING ZONE AND STATE**  
**(Compare to Table 61 in 2011 RBSA)**

Cooling Zone	Homes with Cooling Equipment										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
1	41.9%	7.8%	49.4%▲	7.4%	56.2%	5.9%	56.5%▲	4.3%	54.0%▲	3.0%	754
2	70.9%▲	6.9%	56.9%▲	5.5%	63.1%▲	5.7%	69.9%	6.8%	65.4%▲	3.4%	218
3	98.2%▲	2.2%	0.0%	0.0%	92.4%▼	2.0%	100.0%	0.0%	95.2%▲	1.2%	128
All Cooling Zones	78.4%▲	6.0%	48.1%▲	7.3%	59.1%	5.9%	52.3%▲	4.5%	57.5%▲	3.0%	1,100

[BACK TO REPORT](#)



**Table 52. DISTRIBUTION OF PRIMARY COOLING SYSTEMS IN COOLING ZONES BY TYPE**  
(Compare to Table 62 in 2011 RBSA)

Cooling System Type	Percentage of Primary Cooling Systems								
	Cooling Zone 1		Cooling Zone 2		Cooling Zone 3		All Cooling Zones		n
	%	EB	%	EB	%	EB	%	EB	
Packaged AC (and Window AC)	21.1%▲	3.7%	18.5%▲	3.5%	5.0%	1.7%	21.0%▲	3.7%	105
Packaged HP	0.2%	0.4%	0.0%	0.0%	1.0%	1.2%	0.4%	0.4%	4
Central AC	40.5%	4.3%	55.0%▼	4.4%	42.9%▼	4.9%	43.1%▼	4.3%	243
Water Source Heat Pump	0.0%	0.0%	0.0%	0.0%	0.3%	1.4%	0.1%	0.6%	1
Air Source Heat Pump	27.8%▼	3.4%	21.2%	3.5%	48.3%▲	4.8%	25.2%▼	3.4%	166
Mini-split HP	9.6%	2.7%	3.7%	2.1%	0.7%	1.3%	8.7%▲	2.5%	60
Mini-split AC	0.0%	0.0%	1.1%	5.1%	0.0%	0.0%	0.4%	2.4%	1
GeoThermal Heat Pump	0.7%	0.7%	0.6%▼	1.8%	1.8%	1.4%	1.1%	0.7%	9
All Types	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	587

[BACK TO REPORT](#)



**Table 53. AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AC SYSTEMS BY VINTAGE**  
(Compare to Table 63 in 2011 RBSA)

Vintage	Efficiency (SEER)		
	Mean	EB	n
1990-1999	10.8▲	0.1	34
2000-2006	11.7▲	0.1	63
2007-2014	13.1▼	0.1	55
Post 2014	13.4	0.0	18
Vintage Unknown	12.3	0.0	6
All Vintages	12.2▲	0.0	174



**Table 54. AVERAGE COOLING EFFICIENCY (SEER) FOR PRIMARY CENTRAL AIR SOURCE HEAT PUMP SYSTEMS BY VINTAGE**  
(Compare to Table 64 in 2011 RBSA)

Vintage	Efficiency (SEER)		
	Mean	EB	n
Pre 1990	7.8	0.0	1
1990-1999	12.3 ▲	0.1	16
2000-2006	11.5	0.2	32
2007-2014	14.4 ▼	0.1	70
Post 2014	16.9	0.6	23
Vintage Unknown	13.0	0.0	6
All Vintages	13.4 ▲	0.1	146

**Table 55. AVERAGE NUMBER OF PORTABLE COOLING DEVICES PER HOME BY STATE**  
(Compare to Table 65 in 2011 RBSA)

State	Number of Portable Cooling Devices per Home		
	Mean	EB	n
ID	0.2	0.1	121
MT	0.2 ▲	0.1	129
OR	0.2	0.0	282
WA	0.2 ▲	0.0	568
Region	0.2 ▲	0.0	1,100

**Table 56. PERCENTAGE OF HOMES WITH DUCT SYSTEMS BY STATE**  
(Compare to Table 66 in 2011 RB SA)

State	Homes with Ducts		
	%	EB	n
ID	78.5%	6.1%	121
MT	63.1%	7.1%	129
OR	65.0% ▼	5.5%	282
WA	71.1%	4.2%	568
Total	69.8%	2.8%	1,100

**Table 57. DISTRIBUTION OF DUCTS PER HOME IN UNCONDITIONED SPACE BY STATE**  
(Compare to Table 67 in 2011 RB SA)

Percentage of Ducts in Unconditioned Space	Homes with Ducts										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
1-50%	15.8%	6.9%	5.3%	5.8%	15.8%	6.1%	14.2%	3.9%	14.3%	2.8%	91
51-99%	6.5%▼	5.1%	0.0%	0.0%	11.4%▼	5.4%	8.0%▼	3.3%	8.3%▼	2.3%	45
100%	49.4%▲	8.8%	35.9%▲	9.3%	49.3%▲	7.8%	47.6%▲	5.4%	47.6%▲	3.8%	307
None	28.4%▼	8.1%	58.9%▼	9.5%	23.5%	6.9%	30.2%▼	4.3%	29.8%▼	3.2%	261
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	698

**Table 58. DISTRIBUTION OF DUCT INSULATION LEVELS**  
(Compare to Table 68 in 2011 RBSA)

Duct Insulation Level	Homes with Ducts		
	%	EB	n
None	62.0%▲	2.6%	644
R1-R4	6.1%▼	1.5%	39
R5-R7	8.2%	1.6%	60
R8-R10	10.3%▼	1.7%	81
> R10	13.4%	1.9%	108
Total	100.0%	0.0%	932

**Table 59. AVERAGE TRUE FLOW BY STATE**

State	Average True Flow by State		
	Mean	EB	n
ID	546.2	197.5	6
MT	828.6	NA	1
OR	701.1	105.1	21
WA	836.5	86.9	29
Region	738.9	59.5	57

**Table 60. AVERAGE TRUE FLOW BY STATE  
(NORMALIZED BY HOUSE AREA)**

State	Average True Flow by State (normalized by house area)		
	Mean	EB	n
ID	0.23	0.09	6
MT	0.37	NA	1
OR	0.39	0.08	21
WA	0.39	0.03	29
Region	0.37	0.04	57

**Table 61. AVERAGE CFM PER TON BY SYSTEM TYPE**

System Type	Average CFM per Ton by System Type		
	Mean	EB	n
Air Source Heat Pump	280.3 ▲	29.6	46
Furnace	185.4 ▲	6.7	9
All Systems	234.9 ▲	15.3	53

**Table 62. AVERAGE NUMBER OF LAMPS PER HOME BY STATE**  
**(Compare to Table 73 in 2011 RBSA)**

State	Lamps per Home		
	Mean	EB	n
ID	60.8	5.5	121
MT	62.0	6.2	129
OR	59.4	4.4	282
WA	62.4	3.3	568
Region	61.3	2.3	1,100

**Table 63. AVERAGE NUMBER OF FIXTURES PER HOME**  
**(Compare to Table 74 in 2011 RBSA)**

State	Fixtures per Home		
	Mean	EB	n
ID	37.9	3.6	121
MT	40.3	3.8	129
OR	38.2	2.7	282
WA	42.4	2.4	568
Region	40.4	1.6	1,100

**Table 64. DISTRIBUTION OF LAMPS BY EISA CATEGORY AND STATE**  
**(Compare to Table 75 in 2011 RBSA)**

EISA Category	Percentage of Lamps										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Exempt	34.0%	7.1%	38.9%▲	7.2%	46.0%▲	6.0%	43.0%▲	4.6%	42.4%▲	3.1%	1,077
Noncompliant	23.7%▼	6.4%	21.6%▼	6.1%	18.5%▼	4.7%	15.0%▼	3.3%	17.6%▼	2.3%	982
Compliant	42.3%	7.4%	39.5%	7.1%	35.5%	5.7%	42.0%	4.6%	39.9%	3.1%	1,097
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 65. DISTRIBUTION OF LAMPS BY TYPE AND STATE**  
**(Compare to Table 76 in 2011 RBSA)**

Lamp Type	Percentage of Lamps										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Compact Fluorescent	26.0%	6.6%	26.8%	6.4%	25.4%	5.2%	26.2%	4.1%	26.0%	2.8%	1,056
Halogen	6.0%	3.6%	9.5%	4.4%	6.3%	2.8%	7.5%	2.3%	7.1%	1.5%	747
Incandescent	41.5%▼	7.4%	44.7%▼	7.3%	43.6%▼	5.9%	34.7%▼	4.4%	38.9%▼	3.0%	1,063
Incandescent / Halogen	0.7%	1.3%	0.1%	0.8%	0.4%	0.7%	0.3%	0.5%	0.3%	0.4%	54
Light Emitting Diode	17.0%▲	5.5%	9.4%▲	4.3%	17.1%▲	4.4%	23.8%▲	4.0%	20.0%▲	2.5%	844
Linear Fluorescent	7.7%	4.0%	8.3%	4.1%	6.5%▼	2.9%	6.0%▼	2.2%	6.5%▼	1.5%	663
Other	1.2%	1.6%	1.1%	1.6%	0.7%	0.9%	1.5%	1.2%	1.2%	0.7%	374
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

[BACK TO REPORT](#)





**Table 66. DISTRIBUTION OF LAMPS BY TYPE AND ROOM**  
(Compare to Table 77 in 2011 RBSA)

Lamp Type	Percent of Lamps														
	Compact Fluorescent		Halogen		Incandescent		Incandescent / Halogen		Light Emitting Diode		Linear Fluorescent		Other		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Bathroom	22.2%	2.6%	6.7%▲	1.5%	47.6%▼	3.1%	0.5%	0.4%	19.0%▲	2.5%	1.9%	0.9%	2.2%▲	0.9%	1,084
Bedroom	30.1%	2.9%	6.6%▲	1.6%	41.4%▼	3.0%	0.1%	0.2%	17.8%▲	2.5%	2.4%	0.9%	1.6%▲	0.8%	1,093
Closet	22.4%	2.6%	5.5%▲	1.3%	38.6%▼	3.0%	0.2%	0.4%	17.8%▲	2.4%	13.6%	2.0%	2.0%▲	1.0%	415
Dining Room	19.8%	2.5%	5.9%	1.4%	48.5%▼	3.0%	0.7%	1.7%	23.1%▲	2.6%	1.2%	0.8%	0.8%	0.5%	518
Family Room	23.8%▼	2.6%	8.6%	1.7%	42.1%▼	3.0%	0.4%	0.6%	20.8%▲	2.6%	3.6%▼	1.1%	0.7%	0.4%	472
Garage	15.2%	2.2%	3.0%▲	1.1%	22.8%▼	2.6%	0.0%	0.4%	10.7%▲	2.1%	47.0%▼	3.1%	1.3%	0.9%	599
Hall	27.9%	2.8%	6.6%	1.4%	43.7%▼	3.1%	0.1%	0.3%	19.2%▲	2.5%	1.0%	0.5%	1.5%	0.8%	961
Kitchen	22.3%▼	2.6%	8.8%▼	1.6%	26.3%▼	2.7%	0.5%	0.6%	30.2%▲	2.9%	11.3%▼	2.0%	0.6%	0.4%	1,063
Laundry	29.5%	2.9%	3.0%▼	0.8%	24.1%▼	2.7%	0.1%	0.3%	14.4%▲	2.2%	26.7%	2.8%	2.2%▲	1.0%	657
Living Room	24.8%▼	2.7%	8.3%	1.6%	40.5%▼	3.1%	0.1%	0.2%	23.1%▲	2.6%	2.2%	0.9%	1.0%	0.6%	976
Office	32.6%	3.0%	8.2%	1.6%	29.0%▼	2.8%	0.3%	1.0%	22.1%▲	2.5%	6.2%▼	1.2%	1.6%	1.0%	358
Other	29.2%▲	2.9%	4.4%	1.1%	28.3%▼	2.8%	0.0%	0.1%	14.9%▲	2.3%	22.5%▼	2.6%	0.6%	0.4%	454
Outside	28.3%	2.9%	11.6%	1.9%	40.0%	3.0%	1.1%	0.6%	16.6%	2.3%	0.8%	0.5%	1.5%	0.8%	860
All Room Types	25.0%	2.7%	7.2%	1.5%	38.6%▼	3.0%	0.3%	0.3%	20.1%▲	2.6%	7.4%	1.6%	1.4%	0.7%	1,100

[BACK TO REPORT](#)



**Table 67. AVERAGE NUMBER OF CFLS INSTALLED PER HOME BY STATE**  
**(Compare to Table 78 in 2011 RBSA)**

State	Average Number of CFLs Installed per Home by State		
	Mean	EB	n
ID	15.0	2.2	121
MT	14.4	2.0	129
OR	13.9	1.6	282
WA	15.4	1.4	568
Region	14.8	0.9	1,100

**Table 68. AVERAGE NUMBER OF LEDS INSTALLED PER HOME BY STATE**

State	Average number of LEDs installed per home by state		
	Mean	EB	n
ID	9.0	2.7	121
MT	6.1	1.8	129
OR	10.2	1.6	282
WA	14.5	1.8	568
Region	11.9	1.1	1,100

**Table 69. AVERAGE NUMBER OF HALOGEN LAMPS INSTALLED PER HOME BY STATE**  
**(Compare to Table 79 in 2011 RBSA)**

State	Average Number of Halogen Lamps Installed per Home by State		
	Mean	EB	n
ID	3.8▲	0.9	121
MT	6.2▲	1.8	129
OR	3.8	0.7	282
WA	4.7	0.7	568
Region	4.4	0.4	1,100

**Table 70. AVERAGE NUMBER OF INCANDESCENT LAMPS INSTALLED PER HOME BY STATE**  
**(Compare to Table 80 in 2011 RBSA)**

State	Average Number of Incandescent Lamps Installed per Home by State		
	Mean	EB	n
ID	24.8▼	3.1	121
MT	27.1▼	4.3	129
OR	25.3▼	3.2	282
WA	20.9▼	1.7	568
Region	23.1▼	1.4	1,100

**Table 71. AVERAGE NUMBER OF LINEAR FLUORESCENT LAMPS INSTALLED PER HOME BY STATE**  
**(Compare to Table 81 in 2011 RBSA)**

State	Average Number of Linear Fluorescent Lamps Installed per Home by State		
	Mean	EB	n
ID	5.2 ▼	1.2	121
MT	5.9	1.4	129
OR	4.2 ▼	0.8	282
WA	4.2 ▼	0.6	568
Region	4.4 ▼	0.4	1,100

**Table 72. AVERAGE NUMBER OF OTHER LAMPS INSTALLED PER HOME BY STATE**  
**(Compare to Table 82 in 2011 RBSA)**

State	Average Number of Other Lamps Installed per Home by State		
	Mean	EB	n
ID	0.8 ▲	0.3	121
MT	0.8 ▲	0.2	129
OR	0.5	0.1	282
WA	1.0 ▲	0.2	568
Region	0.8 ▲	0.1	1,100

**Table 73. PERCENT OF HOMES WITH CFLS BY STATE**

State	Percent of Homes		
	%	EB	n
ID	99.2%	1.4%	121
MT	96.0%	3.0%	129
OR	94.6%	2.6%	282
WA	96.3%	1.9%	568
Total	96.1%	1.2%	1,100

[BACK TO REPORT](#)



**Table 74. PERCENT OF HOMES WITH LEDS BY STATE**

State	Percent of Homes		
	%	EB	n
ID	60.4%	7.0%	121
MT	54.6%	7.3%	129
OR	77.5%	5.1%	282
WA	83.4%	3.5%	568
Total	76.8%	2.6%	1,100

[BACK TO REPORT](#)



**Table 75. PERCENTAGE OF HOMES WITH LEDS BY STATE AND OWNERSHIP TYPE**

Ownership Type	Percent of Homes										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Own / buying	62.8%	7.0%	61.8%	7.1%	79.6%	4.9%	88.9%	2.8%	81.0%	2.3%	916
Rent	51.0%	7.5%	26.6%	6.7%	63.8%	5.9%	61.8%	4.4%	58.8%	3.0%	176
Occupy without rent	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	100.0%	0.0%	26.9%	0.0%	4
All Types	60.1%	7.1%	55.2%	7.3%	77.4%	5.1%	83.4%	3.5%	76.7%	2.6%	1,096

[BACK TO REPORT](#)



**Table 76. PERCENTAGE OF HOMES WITH CONNECTED LIGHTING BY STATE**

State	Percent of Homes		
	%	EB	n
ID	0.8%	1.4%	121
MT	0.0%	0.0%	129
OR	2.4%	2.0%	282
WA	2.3%	1.5%	568
Region	2.0%	1.0%	1,100

**Table 77. PERCENTAGE OF HOMES WITH GROW LIGHTS BY STATE**

State	Percent of Homes		
	%	EB	n
ID	0.0%	0.0%	121
MT	0.7%	1.1%	129
OR	0.3%	0.4%	282
WA	0.2%	0.3%	568
Region	0.2%	0.2%	1,100



**Table 78. AVERAGE NUMBER OF STORED COMPACT FLUORESCENT LAMPS BY STATE**  
**(Compare to Table 83 in 2011 RBSA)**

State	Number of Lamps		
	Mean	EB	n
ID	3.4	0.9	121
MT	4.0	1.0	129
OR	3.0 ▼	1.0	282
WA	2.9 ▼	0.4	568
Region	3.1 ▼	0.4	1,100

**Table 79. PERCENTAGE OF ALL CFLS THAT ARE STORED**  
**(Compare to Table 84 in 2011 RBSA)**

State	Percent of CFLs		
	%	EB	n
ID	16.8%	5.7%	120
MT	23.2%	6.4%	124
OR	18.6%	4.8%	264
WA	15.8% ▼	3.5%	548
Total	17.2% ▼	2.4%	1,056

**Table 80. AVERAGE NUMBER OF STORED LED LAMPS BY STATE**

State	Number of Lamps		
	Mean	EB	n
ID	0.7	0.4	121
MT	1.0	0.5	129
OR	0.6	0.3	282
WA	0.7	0.2	568
Region	0.7	0.1	1,100

**Table 81. PERCENTAGE OF ALL LEDS THAT ARE STORED**

State	Percent of LEDs		
	%	EB	n
ID	22.7%	8.4%	73
MT	9.8%	6.0%	69
OR	11.7%	4.2%	230
WA	12.7%	3.2%	472
Total	13.5%	2.3%	844

**Table 82. AVERAGE NUMBER OF STORAGE BULBS BY BULB TYPE AND STATE**

Lamp Category	Average Number of Storage Lamps by Type and State										
	ID		MT		OR		WA		Region		n
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Compact Fluorescent	3.0	0.8	4.4	1.0	3.2	0.9	2.9	0.5	3.1	0.4	1,100
Halogen	0.4	0.2	0.9	0.4	0.5	0.2	0.8	0.2	0.6	0.1	1,100
Incandescent	4.1	1.1	5.4	1.9	4.2	1.1	3.7	0.5	4.0	0.5	1,100
Incandescent / Halogen	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,100
Light Emitting Diode	2.4	0.7	0.7	0.3	1.4	0.3	2.1	0.3	1.9	0.2	1,100
Linear Fluorescent	0.1	0.1	0.1	0.0	0.2	0.2	0.1	0.1	0.1	0.1	1,100
Other	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,100
Unknown	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,100
All Categories	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,100

**Table 83. DISTRIBUTION OF STORAGE BULBS BY BULB TYPE AND STATE**

Lamp Category	Percent of Lamps										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Compact Fluorescent	30.0%	6.9%	39.1%	7.1%	33.8%	5.7%	30.8%	4.4%	32.1%	3.0%	1,100
Halogen	3.8%	2.9%	7.7%	4.0%	5.0%	2.5%	7.8%	2.3%	6.4%	1.4%	1,100
Incandescent	40.6%	7.4%	46.7%	7.3%	44.2%	5.9%	38.3%	4.5%	40.9%	3.1%	1,100
Incandescent / Halogen	0.3%	0.8%	0.0%	0.0%	0.3%	0.5%	0.5%	0.6%	0.4%	0.4%	1,100
Light Emitting Diode	24.2%	6.4%	5.8%	3.5%	14.5%	3.9%	22.0%	3.8%	19.0%	2.4%	1,100
Linear Fluorescent	1.1%	1.5%	0.5%	1.0%	2.2%	2.0%	0.5%	0.5%	1.1%	0.7%	1,100
Other	0.0%	0.0%	0.0%	0.0%	0.0%	0.1%	0.0%	0.0%	0.0%	0.0%	1,100
Unknown	0.1%	0.4%	0.2%	0.6%	0.0%	0.0%	0.1%	0.1%	0.1%	0.1%	1,100
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

[BACK TO REPORT](#)



**Table 84. AVERAGE HOUSEHOLD WATTS PER BULB BY STATE**

State	Average household watts per bulb by State		
	Mean	EB	n
ID	40.4	2.2	121
MT	42.4	2.4	129
OR	39.4	2.2	282
WA	35.8	1.6	568
Region	37.9	1.1	1,100

**Table 85. AVERAGE LIGHTING POWER DENSITY (LPD) BY STATE**  
**(Compare to Table 85 in 2011 RBSA)**

State	Home LPD (W/sq. ft.)		
	Mean	EB	n
ID	1.00 ▼	0.08	121
MT	1.03 ▼	0.08	129
OR	0.99 ▼	0.06	282
WA	0.93 ▼	0.05	568
Region	0.96 ▼	0.03	1,100

[BACK TO REPORT](#) ➤

**Table 86. AVERAGE LIGHTING POWER DENSITY (LPD) BY ROOM TYPE  
(Compare to Table 86 in 2011 RBSA)**

Room Type	Room LPD (W/sq. ft.)		
	Mean	EB	n
Bathroom	2.85 ▼	0.16	1,057
Bedroom	0.67 ▼	0.05	904
Closet	1.46 ▼	0.10	396
Dining Room	1.24 ▼	0.09	485
Family Room	0.74 ▼	0.04	389
Garage	0.41 ▼	0.02	301
Hall	1.27 ▼	0.08	927
Kitchen	1.21 ▼	0.09	1,018
Laundry	1.03 ▼	0.05	599
Living Room	0.60 ▼	0.03	758
Office	0.81 ▼	0.05	337
Other	0.72 ▼	0.05	193
All Room Types	1.08 ▼	0.02	1,099
Living Room	0.60 ▼	0.03	758
Office	0.81 ▼	0.05	337
Other	0.72 ▼	0.05	193
All Room Types	1.08 ▼	0.02	1,099

**Table 87. AVERAGE NUMBER OF APPLIANCES PER HOME BY TYPE**  
(Compare to Table 87 in 2011 RBSA)

Appliance	Number of Appliances per Home		
	Mean	EB	n
Dishwasher	0.85 ▼	0.02	1,100
Dryer	0.94 ▼	0.02	1,100
Freezer	0.39 ▼	0.04	1,100
Refrigerator	1.34	0.04	1,100
Washer	0.96 ▼	0.01	1,100
Water Heater	1.01 ▼	0.02	1,100

[BACK TO REPORT](#)



**Table 88. AVERAGE MANUFACTURE DATE OF APPLIANCES BY TYPE**

Type	Average Production Date by Type		
	Mean	EB	n
Dishwasher	2008	0.4	771
Dryer	2007	0.4	413
Freezer	2004	0.6	170
Refrigerator	2006	0.5	654
Washer	2008	0.4	843

[BACK TO REPORT](#)





**Table 89. DISTRIBUTION OF REFRIGERATOR/FREEZERS BY VINTAGE**  
**(Compare to Table 88 in 2011 RBSA)**

Vintage	Refrigerators		
	%	EB	n
Pre 1980	0.3% ▼	2.4%	1
1980-1989	3.1% ▼	2.1%	14
1990-1994	6.5% ▼	2.4%	50
1995-1999	13.1%	3.1%	100
2000-2004	14.8% ▼	3.1%	142
2005-2009	23.6%	3.7%	218
2010-2014	25.6%	3.6%	246
Post 2014	13.1%	3.0%	110
Total	100.0%	0.0%	708

**Table 90. DISTRIBUTION OF REFRIGERATORS BY TYPE**  
**(Compare to Table 89 in 2011 RBSA)**

Refrigerator Type	Refrigerators		
	%	EB	n
Full Size Refrigerator Only	1.6% ▼	0.9%	21
Mini Refrigerator	7.1% ▲	1.6%	95
Refrigerated Beer Cooler	0.1%	0.6%	1
Refrigerator with Bottom Freezer	17.0%	2.4%	214
Refrigerator with Side-by-Side Freezer	27.4%	2.8%	368
Refrigerator with Top Freezer	35.4% ▼	3.0%	489
Refrigerated Wine Cooler	0.2%	0.4%	2
Side-by-Side Refrigerator with Bottom Freezer	11.2% ▲	2.0%	158
Total	100.0%	0.0%	1,077

[BACK TO REPORT](#)



**Table 91. AVERAGE REFRIGERATOR VOLUME BY TYPE**  
(Compare to Table 90 in 2011 RBSA)

Refrigerator Type	Volume (cu. ft.)		
	Mean	EB	n
Full Size Refrigerator Only	15.3▲	0.2	19
Mini Refrigerator	5.1▼	0.1	67
Refrigerated Beer Cooler	13.0	NA	1
Refrigerator with Bottom Freezer	21.1▼	0.3	164
Refrigerator with Side-by-Side Freezer	23.4	0.3	276
Refrigerator with Top Freezer	18.7▼	0.3	365
Refrigerated Wine Cooler	16.0	NA	1
Side-by-Side Refrigerator with Bottom Freezer	24.4	0.2	125
All Refrigerator Types	18.1▼	0.1	855

**Table 92. DISTRIBUTION OF FREEZERS BY TYPE IN HOMES WITH FREEZERS**  
(Compare to Table 91 in 2011 RBSA)

Freezer Type	Freezers		
	%	EB	n
Freezer, chest	43.4%	5.5%	182
Freezer, upright	56.0%	5.5%	231
Mini-Freezer	0.6%	4.2%	1
Total	100.0%	0.0%	391

**Table 93. AVERAGE FREEZER VOLUME BY TYPE**  
(Compare to Table 92 in 2011 RBSA)

Freezer Type	Freezer Volume (cu. ft.)		
	Mean	EB	n
Freezer, chest	11.8▼	0.8	139
Freezer, upright	17.0▼	0.5	182
All Refrigerator Types	14.4▼	0.5	310

**Table 94. DISTRIBUTION OF CLOTHES WASHERS BY VINTAGE**  
(Compare to Table 93 in 2011 RBSA)

Vintage	Clothes Washers		
	%	EB	n
1980-1989	1.4%	0.9%	14
1990-1994	2.0%▼	1.0%	19
1995-1999	7.1%▼	1.8%	65
2000-2004	17.6%▼	2.8%	136
2005-2009	27.4%▼	3.3%	233
2010-2014	31.0%▲	3.3%	264
Post 2014	13.5%	2.3%	115
Total	100.0%	0.0%	843

**Table 95. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND STATE**  
(Compare to Table 94 in 2011 RBSA)

Clothes Washer Type	Clothes Washers										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Combined Washer/Dryer in one drum	0.0%	0.0%	1.0%	6.1%	1.1%	1.9%	0.4%	0.6%	0.6%	0.5%	7
Horizontal Axis	30.5%	7.2%	37.1%	7.4%	51.2%▲	6.2%	44.5%▲	4.7%	44.2%▲	3.2%	444
Vertical Axis (with agitator)	65.2%	7.4%	47.1%	7.6%	35.2%▼	5.9%	37.6%▼	4.4%	41.1%▼	3.0%	463
Vertical Axis (without agitator)	4.3%	3.8%	14.8%	5.5%	11.6%▲	4.0%	15.8%▲	3.7%	13.0%▲	2.3%	129
Unknown	0.0%	0.0%	0.0%	0.0%	0.2%	1.3%	1.2%	1.5%	0.7%	0.7%	5
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,050

[BACK TO REPORT](#)



**Table 96. DISTRIBUTION OF CLOTHES WASHERS BY TYPE AND VINTAGE**  
(Compare to Table 95 in 2011 RB SA)

Clothes Washer Type	Vintage														
	Pre 1990		1990-1994		1995-1999		2000-2004		2005-2009		2010-2014		Post 2014		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Combined Washer/Dryer in one drum	0.0% ▼	0.0%	0.0% ▼	0.0%	48.0% ▼	0.0%	30.3%	0.0%	6.0%	0.0%	15.7% ▲	0.0%	0.0%	0.0%	4
Horizontal Axis	0.8% ▼	1.0%	0.0% ▼	0.0%	0.8%	0.6%	14.5% ▼	2.6%	33.1% ▼	3.4%	36.4% ▲	3.4%	14.4%	2.3%	392
Vertical Axis (with agitator)	3.2% ▼	1.4%	4.7% ▼	1.6%	17.1% ▼	2.7%	26.1% ▼	3.2%	21.9% ▼	2.8%	18.3% ▲	2.9%	8.7%	1.6%	348
Vertical Axis (without agitator)	0.2%	0.3%	0.5%	0.4%	0.0%	0.0%	8.4%	2.3%	13.6%	2.9%	54.0%	3.7%	23.3%	3.3%	94
All Clothes Washer Types	1.4%	0.9%	2.0%	1.0%	7.1%	1.8%	17.6%	2.8%	27.4%	3.3%	31.0%	3.3%	13.5%	2.3%	843

**Table 97. AVERAGE NUMBER OF CLOTHES WASHER LOADS PER WEEK BY STATE**  
(Compare to Table 96 in 2011 RB SA)

State	Clothes Washer Loads per Week		
	Mean	EB	n
ID	4.3 ▼	0.4	121
MT	3.9	0.4	129
OR	4.2 ▼	0.3	282
WA	4.1 ▼	0.2	568
Region	4.2 ▼	0.2	1,100

**Table 98. AVERAGE CLOTHES WASHER SIZE (CU. FT.) BY STATE**

State	Average Size (cu. Ft.) of Clothes Washers by State		
	Mean	EB	n
ID	3.3	0.1	98
MT	3.3	0.1	120
OR	4.4	0.4	213
WA	3.5	0.1	493
Region	3.7	0.1	924

**Table 99. DISTRIBUTION OF CLOTHES DRYERS BY VINTAGE  
(Compare to Table 97 in 2011 RBSA)**

Vintage	Clothes Dryers		
	%	EB	n
Pre 1980	0.2% ▼	0.5%	2
1980-1989	0.8% ▼	0.7%	6
1990-1994	1.1% ▼	0.7%	9
1995-1999	8.3% ▼	3.5%	33
2000-2004	21.4%	4.8%	69
2005-2009	30.7%	5.8%	131
2010-2014	27.6% ▲	5.5%	117
Post 2014	9.9%	3.4%	47
Total	100.0%	0.0%	413

**Table 100. DISTRIBUTION OF DRYERS BY FUEL TYPE AND STATE**

Dryer Fuel	Dryers										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Electric	96.4%	2.9%	92.7%	4.3%	92.6%	3.6%	90.2%	3.0%	91.9%	1.9%	945
Natural Gas	3.6%	3.7%	4.3%	3.9%	7.4%	3.8%	8.6%	2.9%	7.3%	1.9%	62
Propane	0.0%	0.0%	3.1%	4.2%	0.0%	0.0%	1.2%	1.5%	0.8%	0.7%	7
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,014

[BACK TO REPORT](#)



**Table 101. DISTRIBUTION OF VENTED DRYERS BY STATE**

State	Distribution of Vented Dryers by State		
	%	EB	n
ID	96.4%	2.9%	112
MT	95.4%	3.7%	99
OR	97.9%	1.6%	253
WA	98.5%	0.8%	521
Total	97.8%	0.8%	985



**Table 102. PERCENTAGE OF DRYER LOADS PER WASHER LOAD BY STATE**  
(Compare to Table 98 in 2011 RBSA)

State	Dryer Loads per Washer Load		
	%	EB	n
ID	82.1%	4.7%	116
MT	83.7%	4.2%	124
OR	85.3%	2.9%	273
WA	87.2%	2.4%	548
Region	85.7% ▼	1.6%	1,061

**Table 103. DISTRIBUTION OF DISHWASHERS BY VINTAGE**  
(Compare to Table 99 in 2011 RBSA)

Vintage	Dishwashers		
	%	EB	n
1980-1989	1.3% ▼	0.9%	13
1990-1994	2.9% ▼	1.3%	26
1995-1999	6.7% ▼	1.8%	59
2000-2004	17.0% ▼	3.0%	123
2005-2009	24.3% ▼	3.3%	189
2010-2014	34.9% ▲	3.7%	260
Post 2014	12.9%	2.5%	108
Total	100.0%	0.0%	771

**Table 104. AVERAGE NUMBER OF DISHWASHER LOADS PER WEEK**  
**(Compare to Table 100 in 2011 RB SA)**

State	Dishwasher Loads per Week		
	Mean	EB	n
ID	3.9	0.4	121
MT	3.1	0.3	129
OR	3.4	0.3	282
WA	3.5	0.2	568
Region	3.5	0.2	1,100

**Table 105. DISTRIBUTION OF COOK TOP FUEL BY TYPE**  
**(Compare to Table 101 in 2011 RB SA)**

Fuel Type	Cook Top Fuel		
	%	EB	n
Electric	69.6% ▼	2.9%	786
Gas	28.0% ▲	2.9%	278
Propane	2.3% ▼	0.7%	31
Other	0.0%	0.3%	1
Total	100.0%	0.0%	1,084

**Table 106. DISTRIBUTION OF OVEN FUEL BY TYPE**  
(Compare to Table 102 in 2011 RB SA)

Fuel Type	Oven Fuel		
	%	EB	n
Electric	79.3% ▼	2.6%	885
Gas	19.3% ▲	2.6%	198
Other	0.2%	0.3%	3
Propane	1.2% ▼	0.5%	16
Total	100.0%	0.0%	1,090

**Table 107. PERCENT OF APPLIANCES BEYOND MEASURE LIFE BY STATE**

Type	Percent of Appliances Beyond Measure Life by State		
	%	EB	n
Dishwasher	27.9%	2.8%	771
Dryer	31.9%	2.8%	413
Freezer	19.6%	2.5%	170
Refrigerator	24.3%	2.7%	654
Washer	20.1%	2.5%	843

[BACK TO REPORT](#) ➔

**Table 108. PERCENTAGE OF APPLIANCES THAT ARE WI-FI COMPATIBLE BY APPLIANCE TYPE AND STATE**

Type	Percentage of Appliances that are Wi-Fi Compatible										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Dryer	0.9%	1.5%	0.0%	0.0%	1.3%	0.9%	0.4%	0.4%	0.7%	0.4%	983
Freezer	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	384
Refrigerator	0.0%	0.0%	1.4%	1.6%	0.3%	0.4%	0.8%	1.0%	0.6%	0.5%	1,076
Stove/Oven	0.8%	1.4%	1.0%	1.6%	0.0%	0.0%	0.0%	0.0%	0.2%	0.2%	1,079
Washer	1.0%	1.5%	0.8%	1.2%	1.0%	0.8%	1.4%	1.1%	1.2%	0.7%	975

**Table 109. DISTRIBUTION OF WATER HEATER FUEL BY STATE  
(Compare to Table 103 in 2011 RBSA)**

Water Heater Fuel Type	Water Heaters										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Electric	47.5%	7.5%	39.7%	7.6%	49.6%	6.0%	50.5%▼	4.7%	49.2%▼	3.1%	573
Natural Gas	50.9%	7.5%	51.9%	7.3%	49.7%	5.9%	47.5%▲	4.7%	48.9%▲	3.1%	458
Propane	1.6%	3.4%	8.4%	5.0%	0.7%	1.0%	2.0%	1.0%	1.9%	0.7%	23
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,046

[BACK TO REPORT](#)

**Table 110. DISTRIBUTION OF WATER HEATERS BY TYPE**  
(Compare to Table 104 in 2011 RBSA)

Water Heater Type	Water Heaters		
	%	EB	n
Instantaneous Water Heater	5.9%▲	1.6%	56
Storage Water Heater	94.1%▼	1.6%	1,001
Total	100.0%	0.0%	1,048

**Table 111. DISTRIBUTION OF WATER HEATERS BY DETAILED TYPE**

Detailed Type	Water Heaters		
	%	EB	n
Instantaneous-Electric Resistance	0.8%	0.7%	6
Instantaneous-Fossil Fuel Condensing	3.0%	1.1%	31
Instantaneous-Fossil Fuel Non-Condensing	2.0%	1.0%	19
Storage-Electric Heat Pump (Packaged)	1.8%	0.9%	20
Storage-Electric Resistance	46.2%	3.1%	551
Storage-Fossil Fuel Condensing	4.1%	1.3%	38
Storage-Fossil Fuel Non-Condensing	41.4%	3.2%	390
Storage-Indirect Water Heater	0.5%	0.3%	10
Total	100.0%	0.0%	1,048

[BACK TO REPORT](#)



**Table 112. DISTRIBUTION OF WATER HEATER LOCATION BY STATE**  
(Compare to Table 105 in 2011 RB SA)

Water Heater Location	Water Heaters										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Basement	35.4%	7.3%	47.3%	7.4%	25.7%	5.7%	24.8%	3.3%	27.9%	2.6%	339
Crawlspace	2.4%	3.3%	10.8%	4.9%	3.5%	2.4%	2.8%	1.8%	3.5%	1.2%	41
Garage	32.4%	7.1%	8.6%	4.6%	41.2%	6.1%	38.1%	4.6%	36.4%▲	3.1%	338
Main House	27.5%	6.8%	33.3%	7.1%	26.9%▼	5.0%	29.8%	4.5%	28.9%	2.9%	328
Other	2.4%	3.3%	0.0%	0.0%	2.7%	2.5%	4.4%	2.3%	3.4%	1.3%	30
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,063

**Table 113. DISTRIBUTION OF ALL WATER HEATER LOCATIONS BY SPACE HEATING FUEL TYPE**  
(Compare to Table 106 in 2011 RB SA)

Water Heater Location	All Water Heaters by Space Heating Fuel														
	Electric		Gas		Oil		Pellets		Propane		Wood		All Fuels		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Basement	19.7%▼	2.0%	30.7%	2.8%	50.7%▲	3.5%	50.1%▲	2.5%	42.3%	4.0%	24.0%▲	1.5%	28.3%	2.6%	339
Crawlspace	3.5%	1.3%	3.8%	1.2%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.5%▼	0.7%	3.5%	1.2%	41
Garage	26.7%	2.7%	46.0%▲	3.2%	29.9%	0.0%	23.0%▲	2.8%	30.5%▲	3.7%	31.5%▲	2.7%	37.1%▲	3.1%	336
Main House	49.3%▲	2.9%	17.2%	2.5%	19.4%▼	3.9%	26.9%▼	3.2%	27.2%	4.1%	41.8%▼	2.9%	29.3%	2.9%	328
Other	0.7%▼	0.4%	2.3%	1.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.4%▼	0.9%	1.8%▼	1.0%	19
All Locations	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,051

**Table 114. DISTRIBUTION OF ELECTRIC WATER HEATER LOCATION BY PRIMARY SPACE HEATING FUEL TYPE**  
(Compare to Table 107 in 2011 RB SA)

Water Heater Location	Electric Water Heaters by Space Heating Fuel														
	Electric		Gas		Oil		Pellets		Propane		Wood		All Fuels		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Basement	20.8%	3.2%	47.9%▲	4.7%	50.7%	5.6%	45.7%	0.0%	55.2%	7.6%	23.6%	2.1%	30.3%	4.0%	187
Crawlspace	4.0%	2.2%	9.0%	3.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.0%▼	2.0%	5.0%	2.4%	19
Garage	24.5%	4.1%	15.2%	4.0%	29.9%	0.0%	23.3%▲	3.6%	5.6%	5.5%	32.0%▲	4.2%	22.9%	4.2%	124
Main House	50.1%	4.3%	25.1%▼	3.2%	19.4%▼	6.3%	31.0%▼	3.6%	39.3%	7.8%	42.0%▼	4.4%	40.6%	4.7%	237
Other	0.6%▼	0.6%	2.7%	8.5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	1.5%▼	1.1%	1.3%▼	1.4%	10
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	568

**Table 115. DISTRIBUTION OF GAS WATER HEATER LOCATION BY SPACE HEATING FUEL TYPE**  
(Compare to Table 108 in 2011 RB SA)

Water Heater Location	Gas Water Heaters by Space Heating Fuel												
	Electric		Gas		Pellets		Propane		Wood		All Fuels		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Basement	2.3%▼	2.1%	26.6%	3.6%	66.8%	0.0%	0.0%	0.0%	100.0%	0.0%	25.5%	3.6%	143
Crawlspace	2.1%▼	4.5%	2.8%	1.4%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2.8%	1.4%	20
Garage	44.7%▼	4.0%	52.5%	4.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	51.5%	4.4%	198
Main House	47.1%▲	3.7%	15.9%	3.3%	33.2%	0.0%	0.0%	0.0%	0.0%	0.0%	17.7%	3.4%	84
Other	3.8%	5.6%	2.2%	1.7%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	2.4%	1.7%	9
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	0.0%	0.0%	100.0%	0.0%	100.0%	0.0%	454

**Table 116. DISTRIBUTION OF TANK SIZE BY FUEL TYPE**  
(Compare to Table 109 in 2011 RBSA)

Fuel Type	Tank Size				
	0-50 gallons		>50 gallons		n
	%	EB	%	EB	
Electric	87.3%	2.1%	12.7%	2.2%	541
Natural Gas	92.4%	1.8%	7.6%	1.8%	399
Propane	100.0%	0.0%	0.0%	0.0%	18
Unknown	88.2% ▼	2.9%	11.8%	9.4%	7
All Fuel Types	89.6%	2.0%	10.4%	2.0%	959

**Table 117. DISTRIBUTION OF ELECTRIC WATER HEATER TANK SIZE BY LOCATION**  
(Compare to Table 110 in 2011 RBSA)

Location	Electric Water Heater Tank Size				
	0-50 gallons		>50 gallons		n
	%	EB	%	EB	
Basement	80.5%	3.5%	19.5%	3.6%	179
Crawlspace	90.5%	3.7%	9.5%	6.3%	17
Garage	86.1%	3.6%	13.9%	3.8%	115
Main House	91.2%	2.6%	8.8%	2.7%	225
Other	99.9% ▲	0.0%	0.1% ▼	0.0%	10
All Locations	87.2%	3.2%	12.8%	3.3%	540



**Table 118. DISTRIBUTION OF GAS WATER HEATER TANK SIZE BY LOCATION**  
(Compare to Table 111 in 2011 RBSA)

Location	Gas Water Heater Tank Size				
	0-50 gallons		>50 gallons		n
	%	EB	%	EB	
Basement	93.0%	2.4%	7.0%	3.0%	124
Crawlspace	100.0%	0.0%	0.0%	0.0%	18
Garage	91.5% ▼	2.2%	8.5% ▲	2.3%	178
Main House	95.6%	2.0%	4.4%	3.5%	74
Other	36.1%	0.0%	63.9%	0.0%	3
All Locations	92.7%	2.5%	7.3%	2.5%	397

**Table 119. DISTRIBUTION OF WATER HEATERS BY VINTAGE**  
(Compare to Table 112 in 2011 RBSA)

Vintage	Water Heaters		
	%	EB	n
Pre 1990	2.9% ▼	1.7%	17
1990-1999	16.8% ▼	2.8%	141
2000-2004	18.1% ▼	3.1%	156
2005-2009	27.9% ▼	3.5%	231
2010-2014	24.0% ▲	3.2%	211
Post 2014	10.2%	2.3%	96
Total	100.0%	0.0%	837

**Table 120. AVERAGE NUMBER OF SHOWERHEADS AND FAUCETS PER HOME BY STATE**

Device	Number of Showerheads and Faucets										n
	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Bathroom Faucet	2.5	0.2	2.3	0.2	2.5	0.2	2.5	0.1	2.5	0.1	1,058
Kitchen Faucet	1.0	0.1	1.1	0.1	1.1	0.1	1.0	0.0	1.1	0.0	1,058
Shower	0.7	0.1	0.6	0.1	0.8	0.1	0.7	0.1	0.7	0.1	1,058
Shower / Bathtub combo with diverter valve	1.0	0.1	1.0	0.1	0.6	0.1	0.9	0.1	0.8	0.0	1,058
Shower / Bathtub combo with separate valve	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	1,058

[BACK TO REPORT](#)



**Table 121. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE**  
(Compare to Table 113 in 2011 RB SA)

Flow Rate (GPM)	Showerheads										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 1.5	3.6%	3.8%	8.1%	4.8%	11.5%	4.6%	7.3%	2.8%	8.1%▼	2.0%	73
1.6-2.0	15.8%▼	6.1%	18.1%	6.2%	23.1%	5.8%	24.4%▼	4.3%	22.5%▼	2.9%	217
2.1-2.5	29.8%	7.5%	29.3%	7.2%	29.8%	6.3%	30.9%	4.5%	30.3%	3.1%	299
2.6-3.5	44.0%▲	7.9%	41.1%▲	7.5%	30.9%▲	6.2%	35.1%▲	4.8%	35.4%▲	3.2%	334
> 3.6	6.8%	4.7%	3.4%	3.6%	4.7%▼	3.4%	2.3%▼	1.6%	3.7%▼	1.3%	38
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	961

**Table 122. PERCENTAGE OF HOMES WITH SHOWERHEADS ABOVE 2.0 GPM BY STATE**

State	Homes with Showerheads Above 2.0 GPM		
	%	EB	n
ID	81.5%	6.2%	104
MT	74.8%	6.7%	118
OR	65.5%	6.5%	235
WA	70.2%	4.6%	504
Total	70.6%	3.2%	961

**Table 123. DISTRIBUTION OF SHOWERHEAD FLOW RATE BY STATE**

Flow Rate (GPM)	Showerhead Flow Rate										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 2.5	38.0%	7.7%	39.5%	7.6%	52.8%	6.8%	47.1%	5.0%	47.1%	3.4%	438
≥ 2.5	62.0%	7.7%	60.5%	7.5%	47.2%	6.8%	52.9%	5.0%	52.9%	3.4%	523
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	961

[BACK TO REPORT](#)



**Table 124. DISTRIBUTION OF BATHROOM FAUCET FLOW RATE BY STATE**

Flow Rate (GPM)	Bathroom Faucet Flow Rate										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
≤ 2.2	48.7%	7.9%	54.1%	7.5%	61.1%	6.3%	54.3%	4.7%	55.6%	3.2%	581
> 2.2	51.3%	7.9%	45.9%	7.5%	38.9%	6.3%	45.7%	4.7%	44.4%	3.2%	457
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,038

[BACK TO REPORT](#)



**Table 125. DISTRIBUTION OF KITCHEN FAUCET FLOW RATE BY STATE**

Flow Rate (GPM)	Kitchen Faucet Flow Rate										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
≤ 2.2	48.8%	8.2%	57.8%	7.4%	62.4%	6.3%	54.8%	4.9%	56.5%	3.3%	550
> 2.2	51.2%	8.2%	42.2%	7.5%	37.6%	6.3%	45.2%	4.9%	43.5%	3.3%	448
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	998

[BACK TO REPORT](#)



**Table 126. AVERAGE NUMBER OF TELEVISIONS PER HOME BY STATE**  
(Compare to Table 114 in 2011 RBSA)

State	Televisions per Home		
	Mean	EB	n
ID	2.1	0.2	121
MT	2.1	0.2	129
OR	1.9 ▼	0.1	282
WA	2.1 ▼	0.1	568
Region	2.1 ▼	0.1	1,100

**Table 127. AVERAGE TELEVISION POWER BY VINTAGE**  
(Compare to Table 115 in 2011 RBSA)

Vintage	Television Power (W)		
	Mean	EB	n
Pre 1990	60.1	NA	3
1990-1994	57.9 ▼	2.4	8
1995-1999	65.1 ▼	2.7	27
2000-2004	66.5 ▼	2.6	49
2005-2009	140.8	6.7	209
2010-2014	76.2 ▼	3.9	285
Post 2014	62.0	3.5	120
Vintage Unknown	92.9	5.1	371
All Vintages	83.1	1.7	770

[BACK TO REPORT](#) ➤

**Table 128. DISTRIBUTION OF TELEVISION SCREENS BY TYPE AND VINTAGE**  
(Compare to Table 116 in 2011 RB SA)

Vintage	Television Screens												n
	CRT		LED		LCD		LED+LCD		Plasma		Other		
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1990	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	4
1990-1994	100.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	8
1995-1999	91.8%▼	1.3%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	8.2%	1.5%	35
2000-2004	82.6%▼	2.4%	0.9%	1.4%	11.0%	2.5%	0.0%	0.0%	0.9%	1.4%	4.7%	1.1%	76
2005-2009	8.8%▼	2.0%	2.8%	1.2%	75.7%	3.0%	0.0%	0.0%	12.1%	2.4%	0.6%	0.4%	307
2010-2014	0.1%▼	0.5%	35.9%	3.7%	52.4%	3.9%	3.8%	1.7%	7.9%	2.1%	0.0%	0.0%	401
Post 2014	0.0%	0.0%	87.9%	2.2%	11.9%	2.3%	0.1%	0.1%	0.0%	0.0%	0.0%	0.0%	166
All Vintages	12.6%▼	2.7%	30.1%	3.6%	48.0%	3.9%	1.5%	1.1%	7.1%	1.9%	0.7%	0.4%	751

[BACK TO REPORT](#)



**Table 129. DISTRIBUTION OF TELEVISIONS BY ROOM TYPE**  
(Compare to Table 117 in 2011 RBSA)

Room	Televisions		
	%	EB	n
Bathroom	0.3% ▼	0.2%	8
Bedroom	37.1% ▲	1.9%	570
Closet	0.1%	0.1%	2
Dining Room	1.1%	0.4%	20
Family Room	16.0%	1.2%	320
Garage	0.7%	0.4%	13
Kitchen	4.3%	0.8%	89
Laundry	0.1% ▼	0.1%	3
Living Room	34.9% ▲	1.0%	758
Office	2.5% ▼	0.6%	51
Other	2.9%	0.7%	67
Total	100.0%	0.0%	1,047

**Table 130. AVERAGE PRIMARY TELEVISION ON-TIME HOURS PER DAY PER HOME BY STATE**  
(Compare to Table 118 in 2011 RBSA)

State	Television Use per Home (hours/day)		
	Mean	EB	n
ID	5.8	0.7	118
MT	4.0 ▼	0.5	122
OR	4.8	0.4	266
WA	5.3	0.5	540
Region	5.2	0.3	1,046

**Table 131. AVERAGE NUMBER OF SET-TOP BOXES PER HOME BY STATE**  
(Compare to Table 119 in 2011 RB SA)

State	Set-Top Boxes per Home		
	Mean	EB	n
ID	0.8 ▼	0.2	121
MT	1.0 ▼	0.2	129
OR	1.0 ▼	0.1	282
WA	1.3 ▼	0.1	568
Region	1.1 ▼	0.1	1,100

**Table 132. PERCENTAGE OF HOMES WITH SET-TOP BOXES**  
(Compare to Table 120 in 2011 RB SA)

State	Homes with Set-Top Boxes		
	%	EB	n
ID	49.5% ▼	7.4%	121
MT	62.3% ▼	7.2%	129
OR	64.8% ▼	5.7%	282
WA	68.3% ▼	4.3%	568
Total	64.4% ▼	3.0%	1,100

[BACK TO REPORT](#)





**Table 133. PERCENTAGE OF SET-TOP BOXES WITH DVR CAPABILITY BY STATE**  
(Compare to Table 121 in 2011 RB SA)

State	Set-Top Boxes with DVR		
	%	EB	n
ID	55.9%▲	12.1%	49
MT	53.1%▲	9.7%	74
OR	53.3%▲	7.9%	162
WA	45.9%▲	5.7%	332
Total	49.9%▲	4.1%	617

**Table 134. PERCENTAGE OF HOMES WITH GAMING SYSTEMS**  
(Compare to Table 122 in 2011 RB SA)

State	Homes With Gaming Systems		
	%	EB	n
ID	27.3%	6.7%	121
MT	25.7%	6.5%	129
OR	22.0%▼	4.9%	282
WA	28.9%▼	4.2%	568
Total	26.4%▼	2.8%	1,100

[BACK TO REPORT](#)



**Table 135. AVERAGE NUMBER OF GAMING SYSTEMS PER HOME**

State	Gaming Systems per Home		
	Mean	EB	n
ID	0.39	0.12	121
MT	0.49	0.15	129
OR	0.32	0.09	282
WA	0.47	0.08	568
Region	0.41	0.05	1,100

**Table 136. AVERAGE NUMBER OF COMPUTERS PER HOME BY STATE**  
**(Compare to Table 124 in 2011 RBSA)**

State	Computers per Home		
	Mean	EB	n
ID	1.13 ▼	0.14	121
MT	1.08	0.13	129
OR	1.05 ▼	0.11	282
WA	1.38 ▼	0.11	568
Region	1.23 ▼	0.07	1,100

**Table 137. PERCENTAGE OF HOMES WITH COMPUTERS BY STATE**  
**(Compare to Table 125 in 2011 RBSA)**

State	Homes with Computers		
	%	EB	n
ID	76.0% ▼	6.4%	121
MT	71.7%	6.6%	129
OR	72.2% ▼	5.3%	282
WA	81.1% ▼	3.3%	568
Total	77.2% ▼	2.5%	1,100

**Table 138. AVERAGE NUMBER OF AUDIO SYSTEMS PER HOME BY STATE**  
**(Compare to Table 126 in 2011 RBSA)**

State	Audio Systems per Home		
	Mean	EB	n
ID	0.58▼	0.14	121
MT	0.83▼	0.15	129
OR	0.64▼	0.09	282
WA	0.96▼	0.12	568
Region	0.81▼	0.07	1,100

**Table 139. AVERAGE NUMBER OF SUBWOOFERS PER HOME BY TYPE**  
**(Compare to Table 127 in 2011 RBSA)**

Subwoofer Type	Subwoofers per Home		
	Mean	EB	n
Passive	0.18▼	0.03	1,100
Powered	0.09▼	0.02	1,100
All Subwoofers	0.14▼	0.02	1,100

**Table 140. AVERAGE NUMBER OF OCCUPANTS PER HOME BY STATE**  
**(Compare to Table 129 in 2011 RBSA)**

State	Occupants per Home		
	Mean	EB	n
ID	2.8	0.3	121
MT	2.2	0.2	129
OR	2.5	0.2	282
WA	2.6	0.1	568
Region	2.6	0.1	1,100

**Table 141. AVERAGE NUMBER OF OCCUPANTS BY AGE CATEGORY BY STATE**  
**(Compare to Table 130 in 2011 RBSA)**

Age Category	Number of Occupants									
	ID		MT		OR		WA		Region	
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB
18 or Younger	0.79	0.22	0.44	0.13	0.51	0.11	0.61	0.09	0.59▼	0.06
19 to 64	1.26	0.17	1.25	0.14	1.38	0.14	1.44	0.12	1.38	0.08
65 or Older	0.59	0.12	0.54	0.12	0.57	0.09	0.56	0.07	0.57	0.05

**Table 142. DISTRIBUTION OF HOMES BY OWNERSHIP TYPE AND STATE**  
(Compare to Table 131 in 2011 RBSA)

Ownership Type	Percentage of Homes										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Occupy without rent	0.8%	5.2%	0.0%	0.0%	0.7%	4.4%	0.2%▼	0.4%	0.4%▼	0.5%	4
Own / buying	79.3%	6.1%	80.3%	5.9%	84.0%	4.4%	84.4%	3.6%	83.4%	2.4%	916
Prefer not to say	0.8%	5.2%	1.0%	6.1%	0.3%	1.7%	0.1%	0.9%	0.3%	0.3%	4
Rent	19.0%	6.1%	18.7%	6.0%	15.0%	4.3%	15.3%▼	3.6%	15.9%▼	2.4%	176
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 143. PERCENTAGE OF HOMES AS PRIMARY RESIDENCE BY STATE**  
(Compare to Table 132 in 2011 RBSA)

State	Homes as Primary Residence		
	%	EB	n
ID	99.2%▲	1.4%	121
MT	98.3%	2.0%	129
OR	99.0%	1.2%	281
WA	100.0%	0.0%	568
Total	99.5%▲	0.4%	1,099

**Table 144. DISTRIBUTION OF HOUSEHOLD INCOME BY STATE**

Income Level	Household Income										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
\$0 to under \$25,000	20.4%	6.8%	13.7%	6.1%	13.0%	4.4%	16.7%	3.7%	15.9%	2.5%	159
\$25,000 to under \$50,000	34.6%	7.8%	31.7%	7.9%	20.7%	5.2%	19.1%	3.8%	22.4%	2.7%	227
\$50,000 or more	44.9%	8.2%	54.6%	8.3%	66.3%	6.1%	64.2%	4.7%	61.7%	3.2%	522
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	908

**Table 145. DISTRIBUTION OF HOMES WITH ELECTRIC FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE**  
(Compare to Table 134 in 2011 RBSA)

Percentage of Assistance	Homes with Electric Fuel Assistance										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Less than 25%	1.7%	3.4%	1.4%	2.8%	0.6%▼	1.2%	1.6%	0.9%	1.3%	0.6%	19
Between 26% and 50%	0.0%	0.0%	0.7%	4.4%	0.7%	4.4%	3.1%	1.9%	1.8%	1.0%	29
Between 51% and 75%	0.0%	0.0%	1.0%	6.3%	0.0%	0.0%	0.2%	0.3%	0.2%	0.2%	7
Between 76% and 100%	0.0%	0.0%	0.7%	4.4%	0.0%	0.0%	0.9%	1.2%	0.5%	0.6%	7
No Utility Bill Assistance	98.3%	2.0%	96.2%	2.8%	98.7%	1.3%	94.2%	2.3%	96.2%	1.3%	1,005
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,067

**Table 146. DISTRIBUTION OF HOMES WITH GAS FUEL ASSISTANCE BY PERCENTAGE OF ASSISTANCE AND STATE**  
(Compare to Table 135 in 2011 RBSA)

Percentage of Assistance	Homes with Gas Fuel Assistance										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Less than 25%	1.2%	7.6%	0.9%	5.6%	1.7%	3.5%	0.5%	0.7%	1.0%	0.8%	8
Between 26% and 50%	0.0%	0.0%	0.9%	5.6%	0.0%	0.0%	0.0%▼	0.1%	0.1%▼	0.2%	2
Between 76% and 100%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.5%	1.3%	0.2%	0.7%	2
No Utility Bill Assistance	98.8%	2.0%	98.2%	2.1%	98.3%	2.0%	98.9%	1.0%	98.7%	0.8%	571
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	583

**Table 147. AVERAGE HEATING THERMOSTAT SETPOINT BY STATE**  
(Compare to Table 136 in 2011 RBSA)

State	Heating Thermostat Setpoint (°F)		
	Mean	EB	n
ID	69.6	0.5	118
MT	68.5	0.4	124
OR	68.4	0.4	274
WA	68.6	0.3	545
Region	68.7	0.2	1,061



**Table 148. PERCENTAGE OF HOMES REPORTING A HEATING SETBACK BY STATE**  
**(Compare to Table 137 in 2011 RB SA)**

State	Homes Reporting Heating Setback		
	%	EB	n
ID	60.1%	7.8%	108
MT	63.0%	7.7%	114
OR	63.2%	6.2%	234
WA	70.2%	4.6%	495
Total	66.3%	3.2%	951

**Table 149. AVERAGE SIZE OF HEATING SETBACK BY STATE**  
**(Compare to Table 138 in 2011 RB SA)**

State	Heating Setback (°F)		
	Mean	EB	n
ID	3.7 ▼	0.7	108
MT	4.0 ▼	0.7	114
OR	4.0 ▼	0.6	234
WA	4.1 ▼	0.4	495
Region	4.0 ▼	0.3	951

**Table 150. AVERAGE COOLING THERMOSTAT SETPOINT BY STATE**  
**(Compare to Table 139 in 2011 RBSA)**

State	Cooling Setpoint (°F)		
	Mean	EB	n
ID	72.9	0.7	92
MT	71.2 ▼	0.8	55
OR	72.2 ▼	0.6	176
WA	71.8 ▼	0.6	274
Region	72.0 ▼	0.4	597

**Table 151. PERCENTAGE OF HOMES REPORTING A COOLING THERMOSTAT SETUP BY STATE**  
**(Compare to Table 140 in 2011 RBSA)**

State	Homes Reporting Thermostat Setup		
	%	EB	n
ID	12.7%	7.1%	73
MT	13.5%	9.1%	35
OR	18.0%	6.9%	125
WA	7.8%	3.4%	199
Total	11.9%	2.9%	432

**Table 152. DISTRIBUTION OF THERMOSTATS BY TYPE AND STATE**

Thermostat Type	Distribution of thermostats by Type and State										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Manual thermostat - Analog	30.6%	6.8%	51.8%	7.7%	34.4%	5.5%	37.2%	4.5%	36.4%	3.0%	357
Manual thermostat - Digital	16.8%	6.0%	11.0%	4.7%	10.9%	3.9%	6.7%	2.1%	9.5%	1.8%	128
Programmable thermostat	49.5%	7.6%	34.5%	7.4%	45.8%	6.1%	48.6%	4.7%	47.0%	3.2%	563
Smart thermostat	1.5%	3.4%	2.1%	2.6%	4.3%	3.0%	4.9%	2.4%	4.1%	1.5%	36
Smart/Wi-Fi thermostat	0.0%	0.0%	0.6%	4.9%	2.8%	2.6%	1.1%	0.8%	1.5%	0.8%	16
Wi-Fi enabled thermostat	1.5%	7.3%	0.0%	0.0%	1.8%	2.0%	1.4%	1.2%	1.4%	0.8%	18
None	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.1%	0.6%	0.0%	0.3%	1
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,041

[BACK TO REPORT](#)



**Table 153. PERCENTAGE OF HOMES WITH AT LEAST ONE SMART POWER STRIP BY STATE**

State	Homes with Smart Power Strips		
	%	EB	n
ID	0.8%	1.4%	121
MT	3.1%	2.5%	129
OR	3.0%	2.1%	282
WA	2.0%	1.2%	568
Total	2.2%	0.9%	1,100

[BACK TO REPORT](#)



**Table 154. DISTRIBUTION OF POWER STRIPS BY USE TYPE**

Power Strip Use	Smart Power Strip Use Type										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Entertainment Center	52.9%	13.2%	50.0%	10.7%	44.7%	10.8%	38.8%	6.3%	43.1%	4.8%	357
Home Office	30.9%	12.5%	30.9%	10.0%	28.9%	9.9%	35.2%	6.1%	32.4%	4.6%	254
Other	16.2%	10.3%	19.1%	8.6%	26.4%	9.1%	26.0%	5.7%	24.4%	4.2%	186
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	507

[BACK TO REPORT](#)



**Table 155. PERCENTAGE OF HOUSEHOLDS REPORTING GAS SERVICE BY STATE**  
(Compare to Table 141 in 2011 RB SA)

State	Households Reporting Gas Service		
	%	EB	n
ID	64.7%	7.1%	119
MT	65.4%	6.6%	125
OR	64.3%	5.1%	279
WA	56.5%	4.4%	562
Total	60.5%	2.9%	1,085

**Table 156. DISTRIBUTION OF WOOD USE AS HEATING FUEL BY STATE**  
(Compare to Table 142 in 2011 RB SA)

Annual Wood Use	Homes Using Wood Fuel										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 1 Cord	3.3%	3.4%	2.4%	3.2%	4.3%	2.9%	3.0%▲	1.7%	3.4%▲	1.2%	39
1-3 Cords	9.9%	4.8%	12.8%	5.3%	6.9%▼	2.9%	5.7%▼	2.1%	7.1%▼	1.5%	92
4-6 Cords	3.3%	3.4%	2.4%▼	3.2%	2.6%	1.7%	0.9%▼	1.1%	1.8%▼	0.8%	23
< 1 Cord	3.3%	3.4%	2.4%	3.2%	4.3%	2.9%	3.0%▲	1.7%	3.4%▲	1.2%	39
> 6 Cords	0.0%	0.0%	1.0%	6.1%	0.3%	1.7%	0.0%	0.0%	0.1%▼	0.3%	2
None	83.4%	5.6%	81.4%	5.8%	85.9%▲	4.0%	90.3%▲	2.7%	87.5%▲	2.0%	944
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 157. DISTRIBUTION OF PELLET FUEL USE BY STATE**  
(Compare to Table 143 in 2011 RB SA)

Annual Pellet Fuel Use	Homes Using Pellet Fuel										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 1 Ton	1.6%	3.4%	0.7%	4.4%	0.6%	0.9%	0.1%	0.9%	0.5%▲	0.4%	7
1-2 Tons	1.7%	3.4%	1.0%	6.1%	0.3%▼	1.7%	0.5%▼	0.6%	0.6%▼	0.4%	8
2-4 Tons	0.0%	0.0%	0.7%	4.4%	1.3%	1.5%	0.2%	1.1%	0.5%	0.5%	7
< 1 Ton	1.6%	3.4%	0.7%	4.4%	0.6%	0.9%	0.1%	0.9%	0.5%▲	0.4%	7
> 4 Tons	0.0%	0.0%	0.0%	0.0%	0.3%	1.7%	0.0%	0.0%	0.1%	0.5%	1
None	96.7%	2.7%	97.6%	2.3%	97.5%▲	1.5%	99.2%▲	0.6%	98.3%▲	0.7%	1,077
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 158. DISTRIBUTION OF OIL FUEL USE BY STATE**  
(Compare to Table 144 in 2011 RBSA)

Annual Oil Fuel Use	Homes Using Oil Fuel										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 100 Gallons	0.0%	0.0%	0.0%	0.0%	0.5%	0.9%	0.2%	1.5%	0.3%	0.4%	3
100-250 Gallons	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.8%	0.6%	0.4%	0.3%	7
251-500 Gallons	0.8%	5.2%	0.0%	0.0%	1.4%	2.9%	0.3%▼	0.4%	0.7%	0.6%	8
501-1000 Gallons	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.9%	1.3%	0.5%	0.7%	4
None	99.2%▲	1.4%	100.0%	0.0%	98.2%▲	1.7%	97.8%	1.2%	98.2%▲	0.8%	1,078
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 159. DISTRIBUTION OF PROPANE FUEL USE BY STATE**  
(Compare to Table 145 in 2011 RBSA)

Annual Propane Fuel Use	Homes Using Propane Fuel										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
< 50 Gallons	0.8%▼	5.2%	1.0%	6.1%	0.4%	0.8%	1.0%	0.8%	0.8%	0.5%	10
50-250 Gallons	2.5%	3.3%	0.7%▼	4.4%	2.0%	1.2%	1.2%▼	0.8%	1.6%▼	0.6%	20
251-500 Gallons	0.0%	0.0%	3.1%	3.3%	0.5%▼	0.6%	0.6%	0.8%	0.6%▼	0.4%	10
501-1000 Gallons	1.6%	3.4%	4.6%	4.0%	0.0%	0.0%	0.5%	0.7%	0.8%▼	0.4%	10
> 1000 Gallons	1.7%	3.4%	2.0%	3.9%	0.0%	0.0%	0.2%	1.1%	0.4%	0.4%	5
None	93.4%▲	3.7%	88.7%	4.8%	97.2%▲	1.2%	96.6%▲	1.2%	95.8%▲	0.9%	1,045
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	1,100

**Table 160. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT SELF-FUNDED CONSERVATION BY STATE**  
**(Compare to Table 146 in 2011 RBSA)**

State	Households Reporting Recent Self-Funded Conservation Improvements		
	%	EB	n
ID	56.3%▲	7.5%	117
MT	62.8%	7.1%	129
OR	65.9%▲	5.8%	272
WA	65.4%▲	4.2%	564
Total	64.2%▲	3.0%	1,082

[BACK TO REPORT](#)



**Table 161. PERCENTAGE OF HOUSEHOLDS REPORTING RECENT USE OF UTILITY CONSERVATION PROGRAMS BY STATE**  
**(Compare to Table 147 in 2011 RBSA)**

State	Households Reporting Use of Utility Incentives		
	%	EB	n
ID	10.5%	5.0%	105
MT	16.0%	5.7%	118
OR	16.3%	4.8%	245
WA	15.4%	3.6%	504
Total	15.0%	2.4%	972

[BACK TO REPORT](#)



**Table 162. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF CONSERVATION TAX CREDIT**  
(Compare to Table 148 in 2011 RB SA)

State	Households Reporting Recent Conservation Tax Credits		
	%	EB	n
ID	16.0%	7.6%	67
MT	18.2%	6.8%	78
OR	26.8%	6.9%	168
WA	15.6%	3.9%	333
Total	19.2%	3.0%	646

[BACK TO REPORT](#)



**Table 163. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF BOTH UTILITY AND TAX CREDIT CONSERVATION PROGRAMS**  
(Compare to Table 149 in 2011 RB SA)

State	Households Reporting Use of Utility and Tax Credit Conservation Programs		
	%	EB	n
ID	1.9% ▼	2.2%	105
MT	2.3%	2.1%	118
OR	7.6%	3.5%	245
WA	3.0% ▼	1.5%	504
Total	4.2% ▼	1.3%	972



**Table 164. PERCENT OF HOMES REPORTING HAVING COMPLETED AN ENERGY AUDIT IN THE LAST TWO YEARS**

State	Homes Reporting an Energy Audit		
	%	EB	n
ID	0.9%	1.5%	111
MT	10.4%	4.7%	121
OR	5.7%	2.8%	273
WA	3.9%	1.9%	533
Region	4.5%	1.3%	1,038

[BACK TO REPORT](#)



**Table 165. PERCENTAGE OF HOUSEHOLDS WITH AN ELECTRIC VEHICLE**

State	Percent of Households		
	%	EB	n
ID	0.0%	0.0%	121
MT	2.0%	2.2%	129
OR	1.5%	1.6%	282
WA	0.5%	0.5%	568
Total	0.9%	0.6%	1,100

[BACK TO REPORT](#)



**Table 166. PERCENTAGE OF HOUSEHOLDS WITH SOLAR PANELS**

State	Households with Solar Panels		
	%	EB	n
ID	1.7%	1.9%	121
MT	1.4%	1.6%	129
OR	2.8%	1.8%	282
WA	3.4%	1.7%	568
Total	2.9%	1.0%	1,100

[BACK TO REPORT](#)



**Table 167. PERCENTAGE OF HOUSEHOLDS REPORTING USE OF SMART EQUIPMENT**

State	Households with Smart Equipment		
	%	EB	n
ID	4.2%	2.9%	121
MT	10.5%	4.6%	129
OR	9.9%	3.8%	282
WA	9.2%	2.7%	568
Total	8.8%	1.8%	1,100

[BACK TO REPORT](#)



**Table 168. AVERAGE ANNUAL KWH PER HOME BY STATE**  
**(Compare to Table 150 in 2011 RB SA)**

State	kWh per Home		
	Mean	EB	n
ID	12,750.7	1,103.3	106
MT	10,409.8	1,111.5	118
OR	11,500.7	749.4	249
WA	12,723.7 ▼	772.4	501
Region	12,214.5 ▼	477.5	974

**Table 169. AVERAGE WEATHER NORMALIZED KWH PER HOME BY STATE**  
**(Compare to Table 151 in 2011 RB SA)**

State	kWh per Home		
	Mean	EB	n
ID	12,228.2	1,064.4	106
MT	10,338.6	1,075.0	118
OR	11,326.7	739.7	249
WA	12,320.1 ▼	706.1	501
Region	11,885.0 ▼	447.1	974

**Table 170. AVERAGE ELECTRIC EUI PER HOME BY HEATING FUEL TYPE AND STATE**  
(Compare to Table 152 in 2011 RBSA)

State	Electric EUI per Home (kWh/sq. ft.)						
	Homes w/ Electric Heat		Homes w/ Other Heat		All Homes		n
	Mean	EB	Mean	EB	Mean	EB	
ID	9.4▼	0.7	5.4▼	0.5	7.4	0.4	106
MT	11.7▲	0.8	4.7	0.5	8.2▲	0.5	118
OR	10.0	0.6	5.1▼	0.4	7.5	0.4	248
WA	11.2	0.5	4.7▼	0.2	8.0	0.3	499
Region	10.6	0.3	4.9	0.2	7.8	0.2	971

[BACK TO REPORT](#)



**Table 171. AVERAGE ESTIMATED ANNUAL ELECTRIC SPACE HEAT PER HOME BY STATE**  
(Compare to Table 153 in 2011 RBSA)

State	Space Heat per Home (kWh)		
	Mean	EB	n
ID	6,406.2	1,700.8	22
MT	8,276.6	2,225.7	18
OR	6,285.5	666.7	100
WA	8,441.4	1,300.0	231
Region	7,519.0	730.8	371

**Table 172. AVERAGE ANNUAL GAS USE PER HOME BY STATE**  
**(Compare to Table 154 in 2011 RBSA)**

State	Therms per Home		
	Mean	EB	n
ID	745.0	70.2	46
MT	846.1	111.2	57
OR	694.5	88.1	139
WA	711.1	41.9	235
Region	719.2	35.6	477

**Table 173. AVERAGE WEATHER NORMALIZED GAS USE PER HOME BY STATE**  
**(Compare to Table 155 in 2011 RBSA)**

State	Therms per Home		
	Mean	EB	n
ID	726.9	68.3	46
MT	848.0	113.5	57
OR	677.2	83.7	139
WA	693.7	41.5	235
Region	702.9	34.5	477

**Table 174. AVERAGE GAS EUI PER HOME BY HEATING FUEL AND STATE**  
(Compare to Table 156 in 2011 RBSA)

State	Gas EUI per Home (therms/sq. ft.)						n
	Homes w/ Gas Heat		Homes w/ Other Heat		All Heat w/ Gas Meters		
	Mean	EB	Mean	EB	Mean	EB	
ID	0.35	0.03	0.36	0.05	0.35	0.02	45
MT	0.43	0.04	0.52	NA	0.46	0.03	57
OR	0.35	0.02	0.16▼	0.02	0.26▼	0.01	139
WA	0.37	0.02	0.18▼	0.01	0.30▼	0.01	230
Region	0.36	0.01	0.22	0.01	0.30▼	0.01	471

**Table 175. AVERAGE ESTIMATED GAS SPACE HEAT BY STATE**  
(Compare to Table 157 in 2011 RBSA)

State	Space Heat per Home (therms)		
	Mean	EB	n
ID	557.3	61.6	43
MT	697.5	106.1	56
OR	571.5	79.7	126
WA	557.5 ▼	34.9	210
Region	570.7 ▼	31.4	435

**Table 176. AVERAGE ANNUAL ELECTRICITY AND GAS USE PER HOME BY STATE**  
**(Compare to Table 158 in 2011 RB SA)**

State	kBtu per Home		
	Mean	EB	n
ID	80,769.8	7,680.7	76
MT	80,972.9	9,223.1	89
OR	83,866.3	8,267.4	247
WA	81,964.2	4,710.4	474
Region	82,312.2	3,615.8	886

**Table 177. AVERAGE ELECTRICITY AND GAS EUI BY STATE**  
**(Compare to Table 159 in 2011 RB SA)**

State	EUI per Home (kBtu/sq. ft.)		
	Mean	EB	n
ID	41.9	4.0	76
MT	44.0	4.4	89
OR	45.2	2.7	247
WA	45.6	2.1	474
Region	44.9	1.4	886

**Table 178. AVERAGE WEATHER-NORMALIZED ELECTRICITY AND GAS EUI BY STATE**  
**(Compare to Table 160 in 2011 RBSA)**

State	EUI per Home (kBtu/sq. ft.)		
	Mean	EB	n
ID	40.7 ▼	3.9	76
MT	44.1	4.4	89
OR	44.3	2.6	247
WA	44.4	2.0	474
Region	43.9	1.4	886

**Table 179. AVERAGE ANNUAL OTHER FUEL USE PER HOME BY STATE**  
**(Compare to Table 161 in 2011 RBSA)**

State	kBtu per Home		
	Mean	EB	n
ID	12,210.4	6,000.4	121
MT	17,232.2	6,655.1	129
OR	6,939.4 ▼	1,994.8	282
WA	5,568.2 ▼	1,827.0	568
Region	7,594.6 ▼	1,413.7	1,100



**Table 180. AVERAGE EUI, OTHER FUEL USE  
(Compare to Table 162 in 2011 RB SA)**

State	EUI per Home (kBtu/sq. ft.)		
	Mean	EB	n
ID	4.6 ▼	1.8	121
MT	7.1	2.5	129
OR	4.2 ▼	1.2	282
WA	2.5 ▼	0.7	568
Region	3.6 ▼	0.6	1,100

**Table 181. SUMMARY STATISTICS BY EUI QUANTILES**

Quartile and EUI Range	Summary Statistics by EUI Quartile										
	Conditioned Area		Electric Heat		Efficient Lighting		Air Conditioning		Electric Hot Water		n
	Mean	EB	%	EB	%	EB	%	EB	%	EB	
1 (< 3.55)	2,487.6	70.6	4.5%	0.9%	47.1%	3.4%	57.5%	3.0%	16.5%	2.3%	241
2 (3.55 - 5.96)	2,179.2	61.3	19.4%	2.2%	43.4%	3.4%	62.0%	3.3%	29.7%	2.5%	240
3 (5.96 - 9.26)	2,013.6	56.7	39.0%	3.0%	44.4%	3.4%	72.2%	2.8%	57.5%	3.2%	240
4 ( > 9.26)	1,376.6	39.7	75.9%	2.4%	39.6%	3.3%	47.4%	2.7%	81.2%	2.7%	241

[BACK TO REPORT](#)



**Table 182. DISTRIBUTION OF ELECTRICALLY HEATED HOMES BY VINTAGE AND STATE**  
**(Compare to Table B-1 in 2011 RBSA)**

Vintage	Percentage of Homes										n
	ID		MT		OR		WA		Region		
	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1951	16.1%	10.5%	5.9%	11.1%	23.6%	11.7%	18.2%	6.7%	18.8%	4.9%	91
1951-1960	0.0%	0.0%	0.0%	0.0%	5.3%	6.3%	10.4%	5.3%	6.8%	3.2%	35
1961-1970	9.1%	17.6%	32.3%	31.0%	7.2%	6.0%	10.9%	5.4%	10.9%	3.7%	40
1971-1980	27.3%	17.2%	24.5%	30.0%	27.6%	11.5%	19.2%	6.5%	23.1%	5.3%	85
1981-1990	4.5%	27.8%	11.8%	10.3%	6.1%	6.0%	19.6%	6.6%	13.1%	3.9%	46
1991-2000	20.4%	16.7%	2.9%	17.8%	10.1%	5.9%	7.9%	3.4%	9.9%▼	3.0%	43
2001-2010	18.1%	17.0%	11.8%	10.3%	14.5%	9.3%	10.0%	3.3%	12.5%	3.6%	53
Post 2010	4.5%	27.8%	10.8%	62.1%	5.6%	6.2%	3.8%	2.0%	4.9%	2.4%	24
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	417

**Table 183. DISTRIBUTION OF ELECTRICALLY HEATED HOMES BY GROUND CONTACT TYPE AND STATE**  
(Compare to Table B-2 in 2011 RB SA)

Ground Contact Type	Percentage of Homes										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
> 90% Conditioned Basement	19.8%	14.6%	29.7%	26.4%	3.3%	2.1%	12.5%	5.4%	11.8%	3.5%	53
> 90% Crawlspace	45.5%	17.6%	21.7%	21.8%	64.3%	11.4%	57.7%	8.5%	55.8%	6.0%	230
> 90% Slab	10.9%	14.4%	27.0%	27.6%	18.2%▲	9.8%	21.6%▲	6.9%	19.5%▲	4.9%	71
> 90% Unconditioned Basement	6.6%	13.7%	2.7%	16.5%	3.1%	18.8%	1.2%	1.0%	2.6%	2.0%	15
Adiabatic Space Below	0.0%	0.0%	0.0%	0.0%	0.0%▼	0.0%	0.0%▼	0.0%	0.0%▼	0.0%	1
Mixed Basement and Slab	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.2%	0.0%	0.1%	1
Mixed Conditioned Basement and Slab	0.0%	0.0%	0.0%	0.0%	3.1%	18.8%	0.2%	0.1%	1.0%	1.7%	7
Mixed Crawlspace and Conditioned Basement	4.3%	26.4%	16.2%	24.6%	0.8%▼	1.7%	1.7%▼	1.6%	2.7%▼	1.7%	13
Mixed Crawlspace and Room Over Garage	0.0%	0.0%	0.0%	0.0%	0.0%▼	0.0%	0.5%▼	1.4%	0.3%▼	0.7%	2
Mixed Crawlspace and Slab	12.9%	16.0%	2.7%	16.5%	6.8%▼	5.7%	4.6%	2.5%	6.2%	2.5%	35
Other	0.0%	0.0%	0.0%	0.0%	0.4%	2.8%	0.0%	0.0%	0.1%	0.8%	1
Total	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	429

**Table 184. AVERAGE CONDITIONED FLOOR AREA BY STATE, ELECTRICALLY HEATED HOMES**  
(Compare to Table B-3 in 2011 RB SA)

State	Conditioned Floor Area (sq. ft.)		
	Mean	EB	n
ID	1,945.1	425.6	27.0
MT	1,566.2	415.3	19.0
OR	1,580.0	151.5	114.0
WA	1,677.5▼	119.4	269.0
Region	1,676.5▼	96.0	429.0

**Table 185. AVERAGE CONDITIONED FLOOR AREA BY VINTAGE AND STATE, ELECTRICALLY HEATED HOMES**  
(Compare to Table B-4 in 2011 RB SA)

Vintage	Conditioned Floor Area (sq. ft.)										n
	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Pre 1951	1,511.9▼	109.8	2,246.3	56.7	1,161.7▼	194.6	1,122.9▼	57.5	1,214.7▼	65.3	91
1951-1960	0.0	0.0	0.0	0.0	1,305.6	110.9	1,793.3▲	121.5	1,559.1▲	70.2	35
1961-1970	820.0	221.0	1,415.0	1,279.8	1,821.4▲	42.5	1,546.5▼	155.0	1,545.2▼	85.4	40
1971-1980	1,962.6	361.2	1,476.6	891.7	1,905.7▲	66.7	1,725.5	104.3	1,797.3	69.6	85
1981-1990	2,190.3	NA	1,389.5	845.0	1,214.0▼	82.5	1,773.2▼	142.5	1,606.5▼	71.6	46
1991-2000	2,207.8	928.7	1,816.5	NA	1,456.2▼	53.6	2,299.6	155.8	1,937.7	132.1	43
2001-2010	2,427.8	822.8	3,028.3	1,188.9	1,929.3▲	152.0	2,252.6▼	148.6	2,170.6▼	122.9	53
Post 2010	3,309.3	NA	816.0	NA	1,743.1	73.9	2,354.0	85.6	2,145.8	38.0	24
All Vintages	2,046.6	145.6	1,596.3▼	188.2	1,567.1▼	33.6	1,772.5▼	42.3	1,724.8▼	29.8	417

**Table 186. DISTRIBUTION OF FRAME WALL INSULATION LEVELS, ELECTRICALLY HEATED HOMES**  
(Compare to Table B-5 in 2011 RB SA)

Wall Framing Type	Frame Wall Insulation Levels												n
	R0		R1–R10		R11–R16		R17–R22		>R22		All Insulation Levels		
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Framed 2x4	6.0% ▼	2.8%	42.9% ▲	6.7%	51.0% ▼	6.7%	0.1% ▼	0.4%	0.0%	0.0%	61.1%	6.1%	212
Framed 2x6	6.9%	7.5%	7.4%	4.1%	14.9% ▲	3.4%	70.3% ▼	5.5%	0.5%	0.9%	40.0%	6.4%	153
Framed 2x8	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	100.0%	0.0%	2.4%	5.0%	2
Alternative	18.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	82.0%	0.0%	2.6%	3.6%	3
All Frame Types	6.2%	3.5%	28.7% ▲	6.2%	37.7%	6.6%	26.7% ▼	5.5%	0.7%	0.6%	46.2%	4.0%	356

**Table 187. PERCENTAGE OF ELECTRICALLY HEATED HOMES WITH BASEMENTS BY STATE  
(Compare to Table B-6 in 2011 RBSA)**

State	Homes with Basements		
	%	EB	n
ID	33.0%	15.0%	27
MT	45.9%	24.3%	19
OR	12.0%	8.3%	114
WA	17.1% ▼	5.5%	269
Region	19.5%	4.4%	429

**Table 188. PERCENTAGE OF ELECTRICALLY HEATED HOMES WITH FLOOR AREA OVER CRAWLSPACE BY STATE  
(Compare to Table B-7 in 2011 RBSA)**

State	Homes with Floor Area over Crawlspace		
	%	EB	n
ID	62.7%	15.8%	27
MT	40.6%	23.1%	19
OR	73.9%	10.8%	114
WA	63.9%	8.4%	269
Region	65.3%	5.8%	429

**Table 189. DISTRIBUTION OF FLOOR INSULATION, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-8 in 2011 RBSA)**

Floor Insulation Levels	Percentage of Homes																
	R1–R3		R4–R10		R11– R15		R16– R22		R23– R27		R28– R35		R38+		None		n
	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	%	EB	
Pre 1981	11.3%▲	4.1%	13.4%	6.1%	4.5%▼	3.8%	13.4%	3.8%	12.7%	3.9%	1.4%	1.5%	0.8%▼	0.9%	42.6%▲	7.5%	158
1981-1990	11.7%	9.1%	10.3%	7.2%	0.0%	0.0%	52.8%▲	6.8%	10.7%	2.1%	7.7%	8.4%	0.0%	0.0%	6.8%	2.2%	27
1991-2000	12.6%	2.1%	1.3%	1.3%	0.0%	0.0%	29.7%▼	2.4%	15.5%	1.5%	21.7%▲	2.7%	0.0%	0.0%	19.2%	2.5%	28
2001-2010	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	28.6%	5.5%	12.9%▼	3.6%	39.2%▲	6.4%	8.9%	2.8%	10.4%	4.1%	34
Post 2010	4.6%	6.7%	0.0%	0.0%	0.0%	0.0%	8.3%	2.0%	25.1%	2.9%	5.0%	2.3%	33.8%	0.4%	23.2%	2.0%	17
All Housing Vintages	12.4%▲	5.7%	9.2%	5.4%	3.4%▼	3.5%	18.0%	6.1%	13.4%	3.3%	10.3%▲	4.6%	2.4%▼	2.7%	31.0%▲	7.0%	264

**Table 190. DISTRIBUTION OF ATTIC INSULATION LEVELS, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-9 in 2011 RB SA)**

Insulation Level	Attic Insulation Level		
	%	EB	n
R0	2.5%	2.6%	8
R1-R10	27.0%▲	6.3%	61
R11-R15	5.4%	3.2%	24
R16-R20	6.9%	3.6%	20
R21-R25	10.4%	4.8%	32
R26-R30	11.8%▼	4.2%	23
R31-R40	18.8%▼	5.7%	59
R41-R50	13.6%▲	5.2%	37
>R50	3.6%▲	2.5%	13
Total	100.0%	0.0%	277

**Table 191. DISTRIBUTION OF VAULT CEILING INSULATION LEVEL, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-10 in 2011 RB SA)**

Insulation Level	Vault Ceiling Insulation Level		
	%	EB	n
R0	8.0%	6.1%	5
R1-R15	45.5%▲	12.6%	13
R16-R20	8.3%▼	5.5%	6
R21-R25	1.3%	7.7%	1
R26-R30	4.9%▼	6.0%	3
R31-R40	23.9%	11.2%	12
R41-R50	8.1%▲	16.9%	2
Total	100.0%	0.0%	42

**Table 192. DISTRIBUTION OF WINDOW TYPES BY STATE, ELECTRICALLY HEATED HOMES**  
(Compare to Table B-11 in 2011 RBSA)

Window Type	Windows										
	ID		MT		OR		WA		Region		n
	%	EB	%	EB	%	EB	%	EB	%	EB	
Metal Double Glazed	3.2%	10.6%	0.4%▼	6.4%	4.8%▼	4.0%	11.9%	5.7%	7.9%▼	3.2%	92
Metal Single Glazed	4.8%	7.9%	1.0%	10.0%	2.7%▼	3.1%	3.7%	3.1%	3.4%	2.0%	65
Metal Triple Glazed	0.9%	8.7%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.1%	1.1%	1
Other Double Glazed	0.0%	0.0%	0.0%	0.0%	0.3%	5.8%	0.0%	0.0%	0.1%	1.7%	1
Wood/Vinyl/Fiberglass/Tile Double Glazed	81.5%	12.5%	92.7%	13.0%	85.1%	7.8%	79.8%	6.4%	82.4%▲	4.4%	373
Wood/Vinyl/Fiberglass/Tile Single Glazed	9.6%	10.8%	5.9%	17.2%	5.8%	6.8%	4.2%	2.2%	5.5%	2.6%	65
Wood/Vinyl/Fiberglass/Tile Triple Glazed	0.0%	0.0%	0.0%	0.0%	1.3%	2.0%	0.4%	0.7%	0.6%	0.5%	7
All Framing Types	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	100.0%	0.0%	429

**Table 193. AVERAGE NORMALIZED HEAT-LOSS RATE BY VINTAGE AND STATE, ELECTRICALLY HEATED HOMES**  
(Compare to Table B-12 in 2011 RBSA)

Vintage	Heat Loss Rate										
	ID		MT		OR		WA		Region		n
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Pre 1981	0.370	0.040	0.323	0.058	0.480▲	0.048	0.437	0.040	0.434▲	0.025	244
1981-1990	0.239	NA	0.251	0.047	0.282▼	0.007	0.336▲	0.027	0.300▲	0.012	43
1991-2000	0.369▲	0.040	0.221	NA	0.232▲	0.007	0.250▲	0.008	0.263▲	0.006	42
2001-2010	0.216	0.019	0.201	0.036	0.241▲	0.016	0.264▲	0.008	0.246▲	0.007	52
Post 2010	0.000	0.000	0.246	NA	0.199	0.004	0.251	0.006	0.224	0.003	23
All Vintages	0.305	0.014	0.266	0.021	0.287▼	0.010	0.326	0.013	0.305▼	0.007	404



**Table 194. AVERAGE HEAT-LOSS RATE BY VINTAGE AND STATE, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-13 in 2011 RB SA)**

Vintage	Heat Loss Rate (UA) per Home										n
	ID		MT		OR		WA		Region		
	Mean	EB	Mean	EB	Mean	EB	Mean	EB	Mean	EB	
Pre 1981	594.0	119.3	523.0	113.4	682.1	87.3	601.1	72.1	619.4	47.3	244
1981-1990	522.8	NA	286.0	105.4	312.0▼	7.6	583.6	77.7	463.5	35.2	43
1991-2000	749.9	246.0	401.9	NA	355.9▼	20.0	524.6▲	31.9	493.7	34.0	42
2001-2010	490.1	139.5	555.0▼	162.5	450.9▲	25.4	574.3▲	32.1	511.3	22.2	52
Post 2010	0.0	0.0	201.0	NA	313.3	6.9	574.4	18.9	413.7	8.1	23
All Vintages	597.6	63.5	403.6▼	42.9	422.8▼	18.4	575.3	27.5	511.4▼	16.1	404

**Table 195. AVERAGE BLOWER DOOR AIR TIGHTNESS BY STATE, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-14 in 2011 RB SA)**

State	Blower Door Air Tightness (ACH50)		
	Mean	EB	n
ID	7.0	1.9	16
MT	7.0	1.3	10
OR	10.8	3.1	67
WA	8.3▼	0.7	164
Region	8.8	1.0	257

**Table 196. AVERAGE HEATING THERMOSTAT SETPOINT BY STATE, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-15 in 2011 RBSA)**

State	Heating Thermostat Setpoint (°F)		
	Mean	EB	n
ID	68.8	1.5	27
MT	68.1	1.4	18
OR	69.4	1.0	110
WA	69.1	0.5	254
Region	69.1	0.4	409

**Table 197. PERCENTAGE OF ELECTRICALLY HEATED HOMES REPORTING A HEATING SETBACK BY STATE**  
**(Compare to Table B-16 in 2011 RBSA)**

State	Homes Reporting Heating Setback		
	%	EB	n
ID	34.7%	16.1%	27
MT	48.6%	24.3%	19
OR	43.4%	11.9%	114
WA	51.1% ▼	7.4%	269
Region	46.5% ▼	5.7%	429

**Table 198. AVERAGE WEATHER NORMALIZED KWH PER HOME BY STATE, ELECTRICALLY HEATED HOMES**  
**(Compare to Table B-17 in 2011 RBSA)**

State	kWh per Home		
	Mean	SE	n
ID	16,855.5	1,861.3	22
MT	15,666.4	1,819.1	18
OR	14,316.3	980.7	101
WA	16,198.9 ▼	800.0	233
Region	15,688.9 ▼	568.4	374

**Table 199. DISTRIBUTION OF PRIMARY HEATING SYSTEMS, ELECTRICALLY HEATED HOMES**

Heating System Type	Primary Heating Systems		
	%	EB	n
Air Source Heat Pump	28.7%	4.9%	131
Boiler	0.5%	0.7%	3
Electric Baseboard and Wall Heaters	29.6%	5.0%	115
Furnace	10.0%	3.4%	45
GeoThermal Heat Pump	1.8%	1.3%	9
Mini-split HP	11.9%	3.2%	52
Other Zonal Heat	8.8%	3.0%	57
Plug-In Heaters	8.5%	3.6%	28
Stove/Fireplace	0.1%	0.5%	1
Total	100.0%	0.0%	429